

Technical data sheet

PYROPLUG® Shell drill crown insulation

Item number: 7202624



Pipe shell for cable insulation.

Consisting of a one-part, hard pipe sleeve and two soft plugs of 50 mm diameter. Protect the pipe sleeves and plugs against water in order to guarantee safe foaming in case of fire. For interior application.

FBA-D pipe shells, FBA-DS plug, FBA-M fire protection compound, FBA-D-BS additional kit, wall plate



Permanently elastic, closed-pore foam

Master data

| | |
|---------------------|---------------------------------------|
| Item number | 7202624 |
| Type | FBA-D100 |
| Description 1 | Drill crown insulation |
| Manufacturer | OBO |
| Dimension | Ø78x100mm |
| Colour | Red |
| Material | Permanently elastic, closed-pore foam |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 15.5 kg |
| Weight unit | kg/100 pc. |


Technical data sheet

PYROPLUG® Shell drill crown insulation


Item number: 7202624



Dimensions

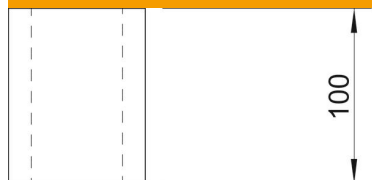

| | |
|-------------|--------|
| Length | 100 mm |
| Width | 78 mm |
| Dimension L | 100 mm |

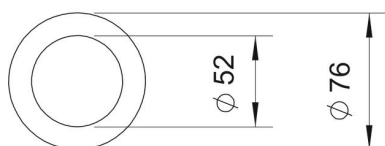

Technical data

| | |
|-------------------------|----------|
| Fire protection version | Box body |
| Shape | Round |
| For opening, max. | 100 mm |
| For opening, min. | 78 mm |
| Accessories required | yes |