

# Technical data sheet

T piece, double, symmetrical, for device installation trunking Rapid 80 type GS-D70210  
Item number: 6278460



T piece suitable for direct wall mounting.



St Steel

## Master data

|                     |                      |
|---------------------|----------------------|
| Item number         | 6278460              |
| Type                | GS-DT70210RW         |
| Description 1       | T piece              |
| Description 2       | symmetrical          |
| Manufacturer        | OBO                  |
| Dimension           | 70x210x500           |
| Colour              | Pure white; RAL 9010 |
| Material            | Steel                |
| Smallest sales unit | 1                    |
| Unit of quantity    | Piece                |
| Weight              | 207 kg               |
| Weight unit         | kg/100 pc.           |



# Technical data sheet

T piece, double, symmetrical, for device installation trunking Rapid 80 type GS-D70210

Item number: 6278460



## Dimensions

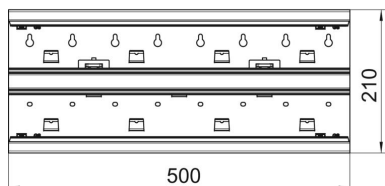

|        |        |
|--------|--------|
| Length | 500 mm |
| Width  | 210 mm |
| Height | 70 mm  |

## Technical data

|                                   |          |
|-----------------------------------|----------|
| Number of covers                  | 2        |
| Version for                       | Base     |
| for duct width                    | 210 mm   |
| for trunking height               | 70 mm    |
| Halogen-free                      | yes      |
| Cable retaining clip              | no       |
| Duct connector                    | no       |
| Cover mounting type               | Internal |
| Mounting perforation in base      | yes      |
| Cover width                       | 76.5 mm  |
| Cover width 2                     | 76.5 mm  |
| Protection rating                 | IP30     |
| Protective film                   | yes      |
| Protection rating IK code         | IK10     |
| Symmetrical                       | yes      |
| Permitted temperature range, max. | 60 °C    |
| Permitted temperature range, min. | -25 °C   |