


Technical data sheet

Junction box, T series, with Promo Box plug-in seals

Item number: 2006964

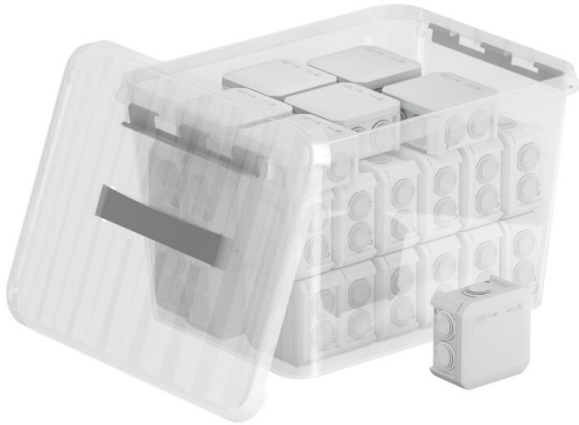

The tried-and-trusted junction boxes of the T series are packed in a practical and recloseable 22-litre multifunction box.

The T series is made of a thermoplastic polypropylene plastic with plug-in seals made of ethylene vinyl acetate (EVA). The entire range is halogen-free and UV-resistant.

The plug-in seals can be removed and replaced with pipe insertions. Alternatively, instead of seals, cable glands can be inserted through the openings and be countered internally with a locknut.

Flame-resistant, test temperature 650°C



Plastic

Master data

| | |
|---------------------|-----------------------|
| Item number | 2006964 |
| Type | TB PB 40 |
| Description 1 | Junction box |
| Description 2 | promotion box 35x T40 |
| Manufacturer | OBO |
| Dimension | 22 Liter |
| Colour | Transparent |
| Material | Plastic |
| Smallest sales unit | 1 |
| Unit of quantity | Packaging unit |
| Weight | 234.5 kg |
| Weight unit | kg/100 PUs |


Technical data sheet

Junction box, T series, with Promo Box plug-in seals




Item number: 2006964

Dimensions

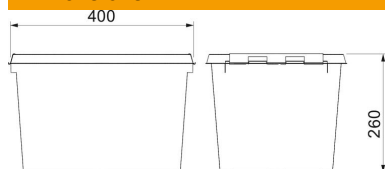

| | |
|--------|--------|
| Length | 400 mm |
| Width | 300 mm |
| Height | 260 mm |



Technical data

| | |
|-----------------------------------|---|
| Expandable | yes |
| Type of insertion... | Plug-in seal |
| Type of entry | Cable |
| Type of housing penetration | Cuttable stepped membrane |
| Measured insulation voltage V_i | 500 V |
| Cover | Not transparent |
| Cover fastening | Screwed |
| Entry from rear | yes |
| Entries | ax Mxx |
| Explosion-tested version | no |
| Flame-resistant | acc. to VDE 0471/DIN 695 Part 2-1, test temperature 650°C |
| Maintain electrical functions | Without |
| For Ex zone | Without |
| For Ex zone gas | Without |
| For Ex zone dust | Without |
| Fibre-glass reinforced | yes |
| Halogen-free | yes |
| With screening | no |
| with lid | yes |
| Mounting type | Wall/ceiling mounting |
| Nominal voltage | 500 V |
| Sealable | yes |
| Protection rating | IP66 |
| Permitted temperature range, max. | 60 °C |
| Permitted temperature range, min. | -5 °C |
| Weatherproof | no |