

# Technical data sheet

## UP Flush-mounted electronic box 66, additional clamping space

Item number: 2003726



Flush-mounted electronic box, with additional terminal area, for use in masonry with an installation depth of at least 66 mm.

- With 4 couplable connectors with bayonet lock
- 6 combination pipe entries of Ø 20 and 25 mm
- 8 entries up to Ø 20 mm
- 6 entries up to Ø 14 mm
- 2 entries up to Ø 20 mm in the base
- Partition for different voltages, with break-out openings
- 4 x 3 screw domes

Tested according to DIN EN 60670-1, DIN EN 60670-22 and DIN 49073-1.



**PP** Polypropylene

### Master data

Item number	2003726
Type	UE 66
Description 1	UP Flush-mount. electronic box
Description 2	with device screws
Available from	01.10.2021
Manufacturer	OBO
Dimension	Ø60xH66x148
Colour	Jet black
Material	Polypropylene
Smallest sales unit	10
Unit of quantity	Piece
Weight	6.15 kg
Weight unit	kg/100 pc.


# Technical data sheet

## UP Flush-mounted electronic box 66, additional clamping space

Item number: 2003726



### Dimensions

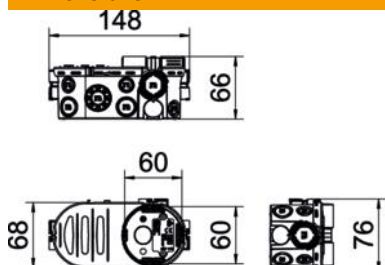

Length	148 mm
Width	76 mm
Height	66 mm

### Technical data

No. of entries	22
Type of insertion...	NYM cables, data cables and corrugated pipes
Type of housing penetration	Break-out opening
Version for	Single
Type	Electrics socket
Device fixing	Screws ,
Cover	Without
Cover fastening	Screws ,
Entry from rear	yes
Flame-resistant	acc. to VDE 0471/IEC 60695-2-11, test temperature 650°C
Shape	Oval
for pipe diameter	20/25 mm
Halogen-free	yes
Combination entries Ø 20 / 25 mm	6
Max. Conductor cross-section	2.5 mm <sup>2</sup>
With nail strap	no
With bolts	yes
Nominal cross-section, max.	2.5 mm <sup>2</sup>
Nominal cross-section, min.	1.5 mm <sup>2</sup>
Pipe entries Ø 20 mm	10
Impact-resistant	yes
Protection rating	IP30
Airtight	no
Rated voltage	400 V