LFS
EGS
UFS



Cable routing systems
Device systems
Underfloor systems
Belgium

2019/2020

Building Connections

OBO BETTERMANN



Contact
Customer Service
+32 (0)3 870 74 00


+32 (0)3 887 40 00

info@obo.be
www.obo.be

OBO BETTERMANN

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Cable routing systems

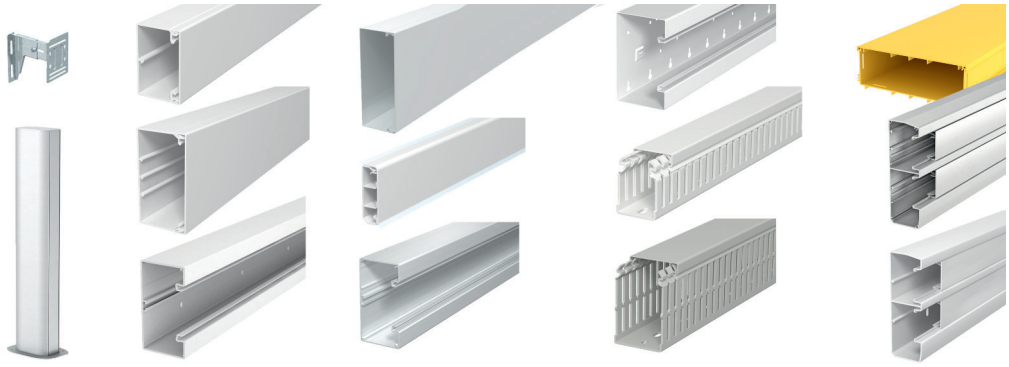

WDK cable routing trunking systems, data centre systems, skirting trunking systems, wiring trunking systems, Rapid 45 device installation trunking, Rapid 80 device installation trunking, service poles

see page 23


Device systems



Sockets, switching and connection devices, data equipment, multimedia, underfloor and surface-mounted, Deskboxes, supply units, power distributors

see page 211

Underfloor systems

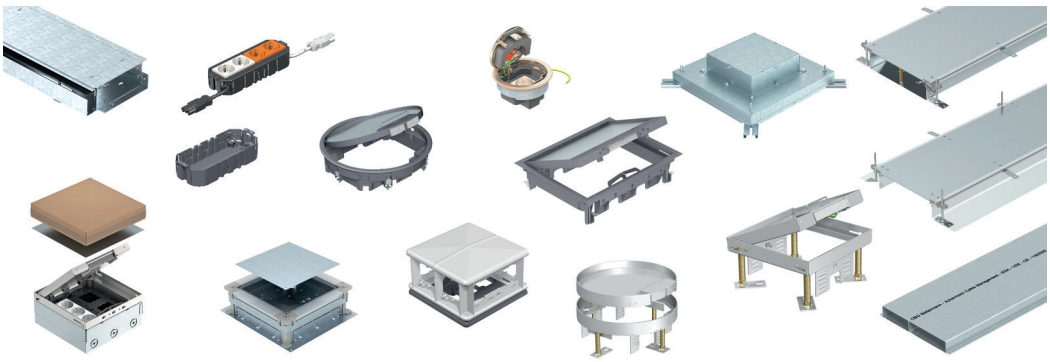

Concealed systems, flushfloor systems, system for low screed heights, on-floor systems, device inserts and cassettes, complete solutions and floor outlets, systems for raised and cavity floors

see page 287

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/22 18:28:44 18:28:44 (LLExport_02579) / 2019/04/22



Welcome to the World of OBO

New solutions to improve functionality and the ease of installation – OBO employees all around the world use their knowledge, experience and creativity to make this happen. Because we know that each individual market has its special characteristics and that the requirements for our products change within each market, we have paid particular attention to the compatibility of products in their Country of use. We always offer our customers intelligent, smart solutions. Our brands always keep this promise. The OBO global team wishes to make the work of electrical planners and operatives around the world as easy as possible.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18



Production location

Subsidiary

Representative office

OBO BETTERMANN

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18



Building Connections

Operating globally OBO Bettermann is proud to be a family owned business. The core of our success is based on mutual trust and the committed interaction between our employees, our customers and suppliers alike. We stand by these connections and it is the benchmark of our everyday activities and is supported by all employees within the OBO Group. Our aim is to be your first port of call for the most innovative connections for electrical and data technology infrastructure.

Through continuous investment, research & development we continue to grow offering innovative, quality products. We embrace change and look to create effective, modern electrical installation products that integrate discreetly into the architecture of a building.

We use the latest digital technology to expand links between countries in many ways between both people and products to overcome distance and cultural barriers. At the heart of the business is the solution motif:
Conducting Electricity, Routing Data & Controlling Energy.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Wertseiten / en / 2019/04/18 11:21:04 (LLExport-02579) / 2019/04/18

since 1871



Ohne BOhren – OBO
The first metal OBO anchor gave the company, 40 years after its foundation, the additional name OBO – ohne Bohren (without drilling). Up to that point, it was accepted that an anchor had to be drilled into the wall. However, an OBO engineer had a groundbreaking idea: He developed a metallic anchor, the innovative construction of which permitted it to be knocked directly into the wall without any drilling.


This was a huge mounting advantage, considerably simplifying the work of the tradesmen of the time and, as such, becoming one of the biggest milestones in the history of the company.

Only the continuous dedication and spirit of innovation of each individual employee has made it possible to expand the product range to more than 30,000 products today.

Service
OBO Bettermann has both sales & manufacturing companies placed strategically around the globe to ensure we can guarantee the highest possible customer service levels locally. We provide competent regional advice, reliability and approachability creating a high level of acceptance and credibility leading to long standing working partnerships. Our aim is to continually align our company to the requirements of the current marketplace.

Reliability
Operating in more than 60 countries allows us to give consistent customer service. With local stock and continuous improvement to manufacturing techniques our business locations ensure that we have the local knowledge and products in the right place at the right time.

Flexibility
We strive for the best possible transparency for all of our divisions and companies within the OBO Bettermann Group. All of our objectives, processes and data are continually measured, assessed and if required improved upon. We listen to our local businesses as we understand that the needs for their local market may differ greatly from ours and we both encourage and support them fully.

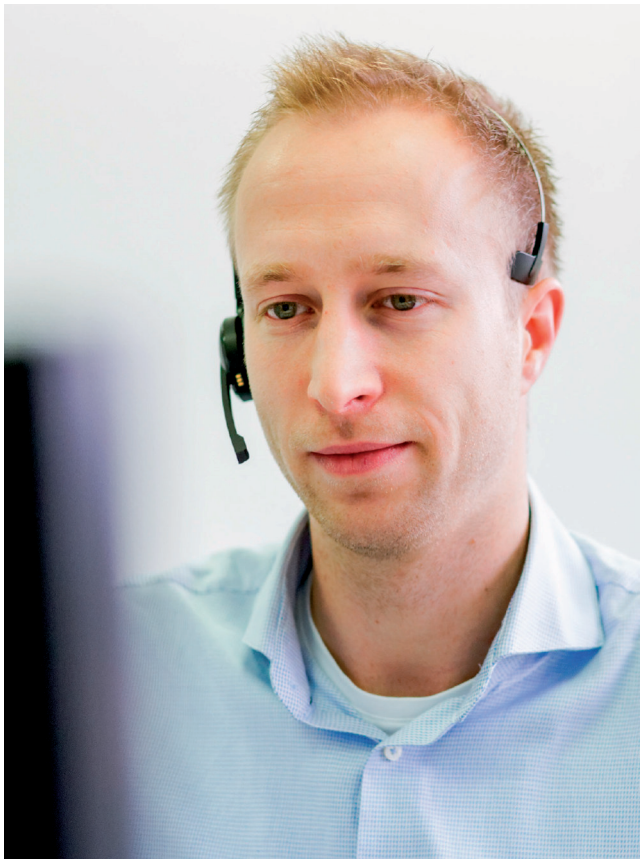



Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


Discover the world of OBO systems

OBO systems provide connections. The high production depth and strong process automation make it possible to deal with the enquiries and requirements of our customers in a flexible and targeted manner.


Reliable, safe and of the highest quality: Product features such as installation speed, load capacity, functionality, availability and safety are at the forefront of every innovation.

Discover the world of OBO systems.

- **Connection and fastening systems**
- **Transient and lightning protection systems**
- **Cable support systems**
- **Fire protection systems**
- **Cable routing systems**
- **Device systems**
- **Underfloor systems**

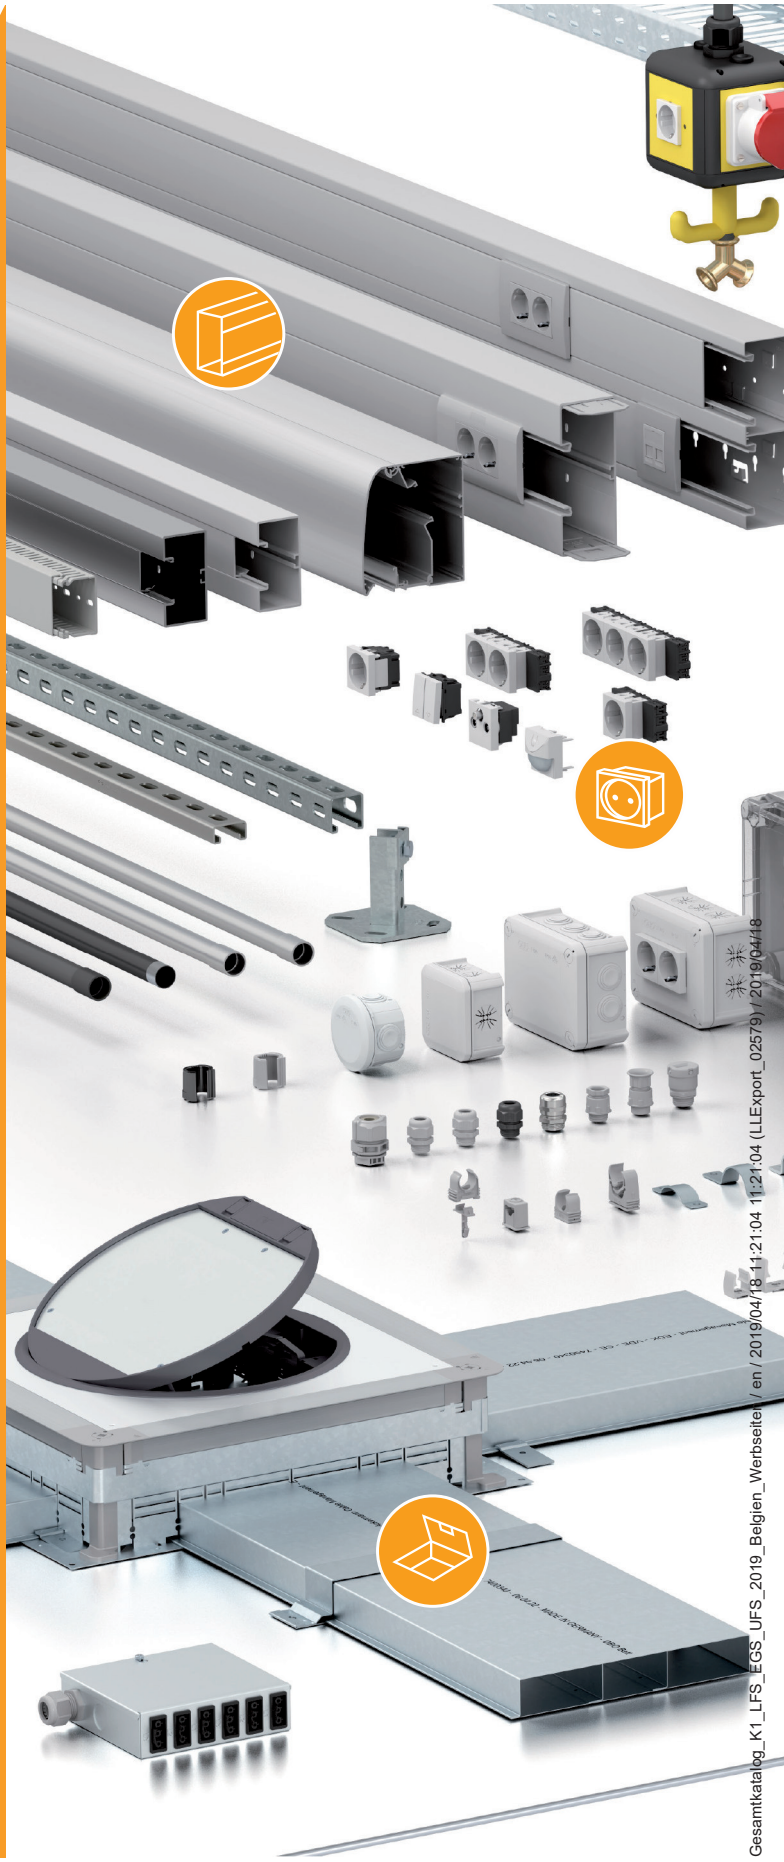


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

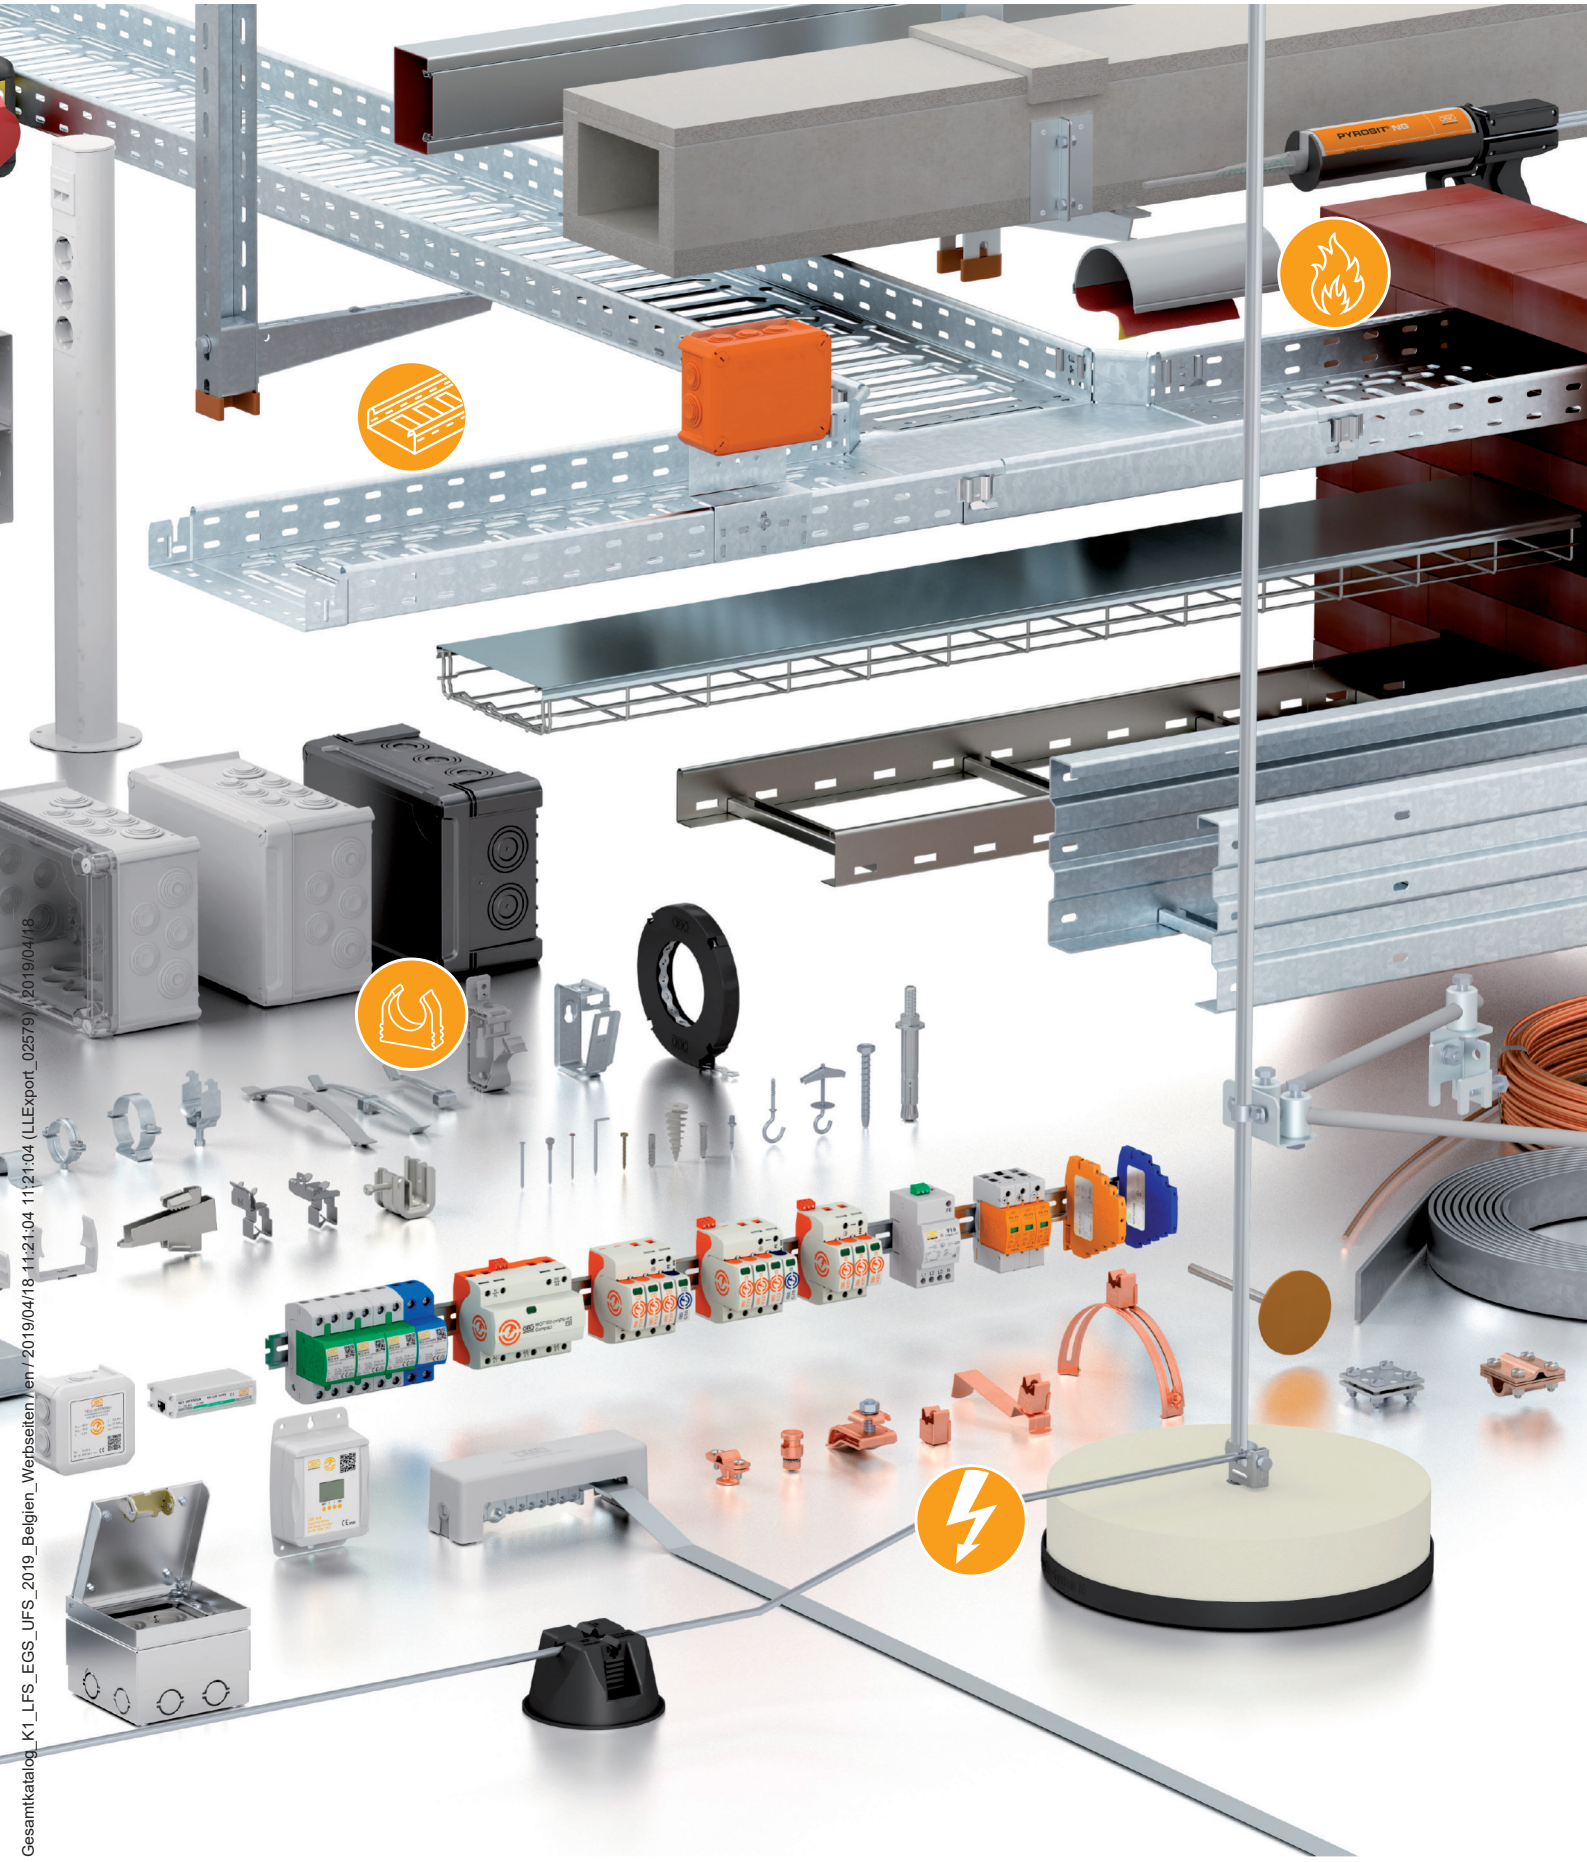


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten_en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

We offer solutions for every application

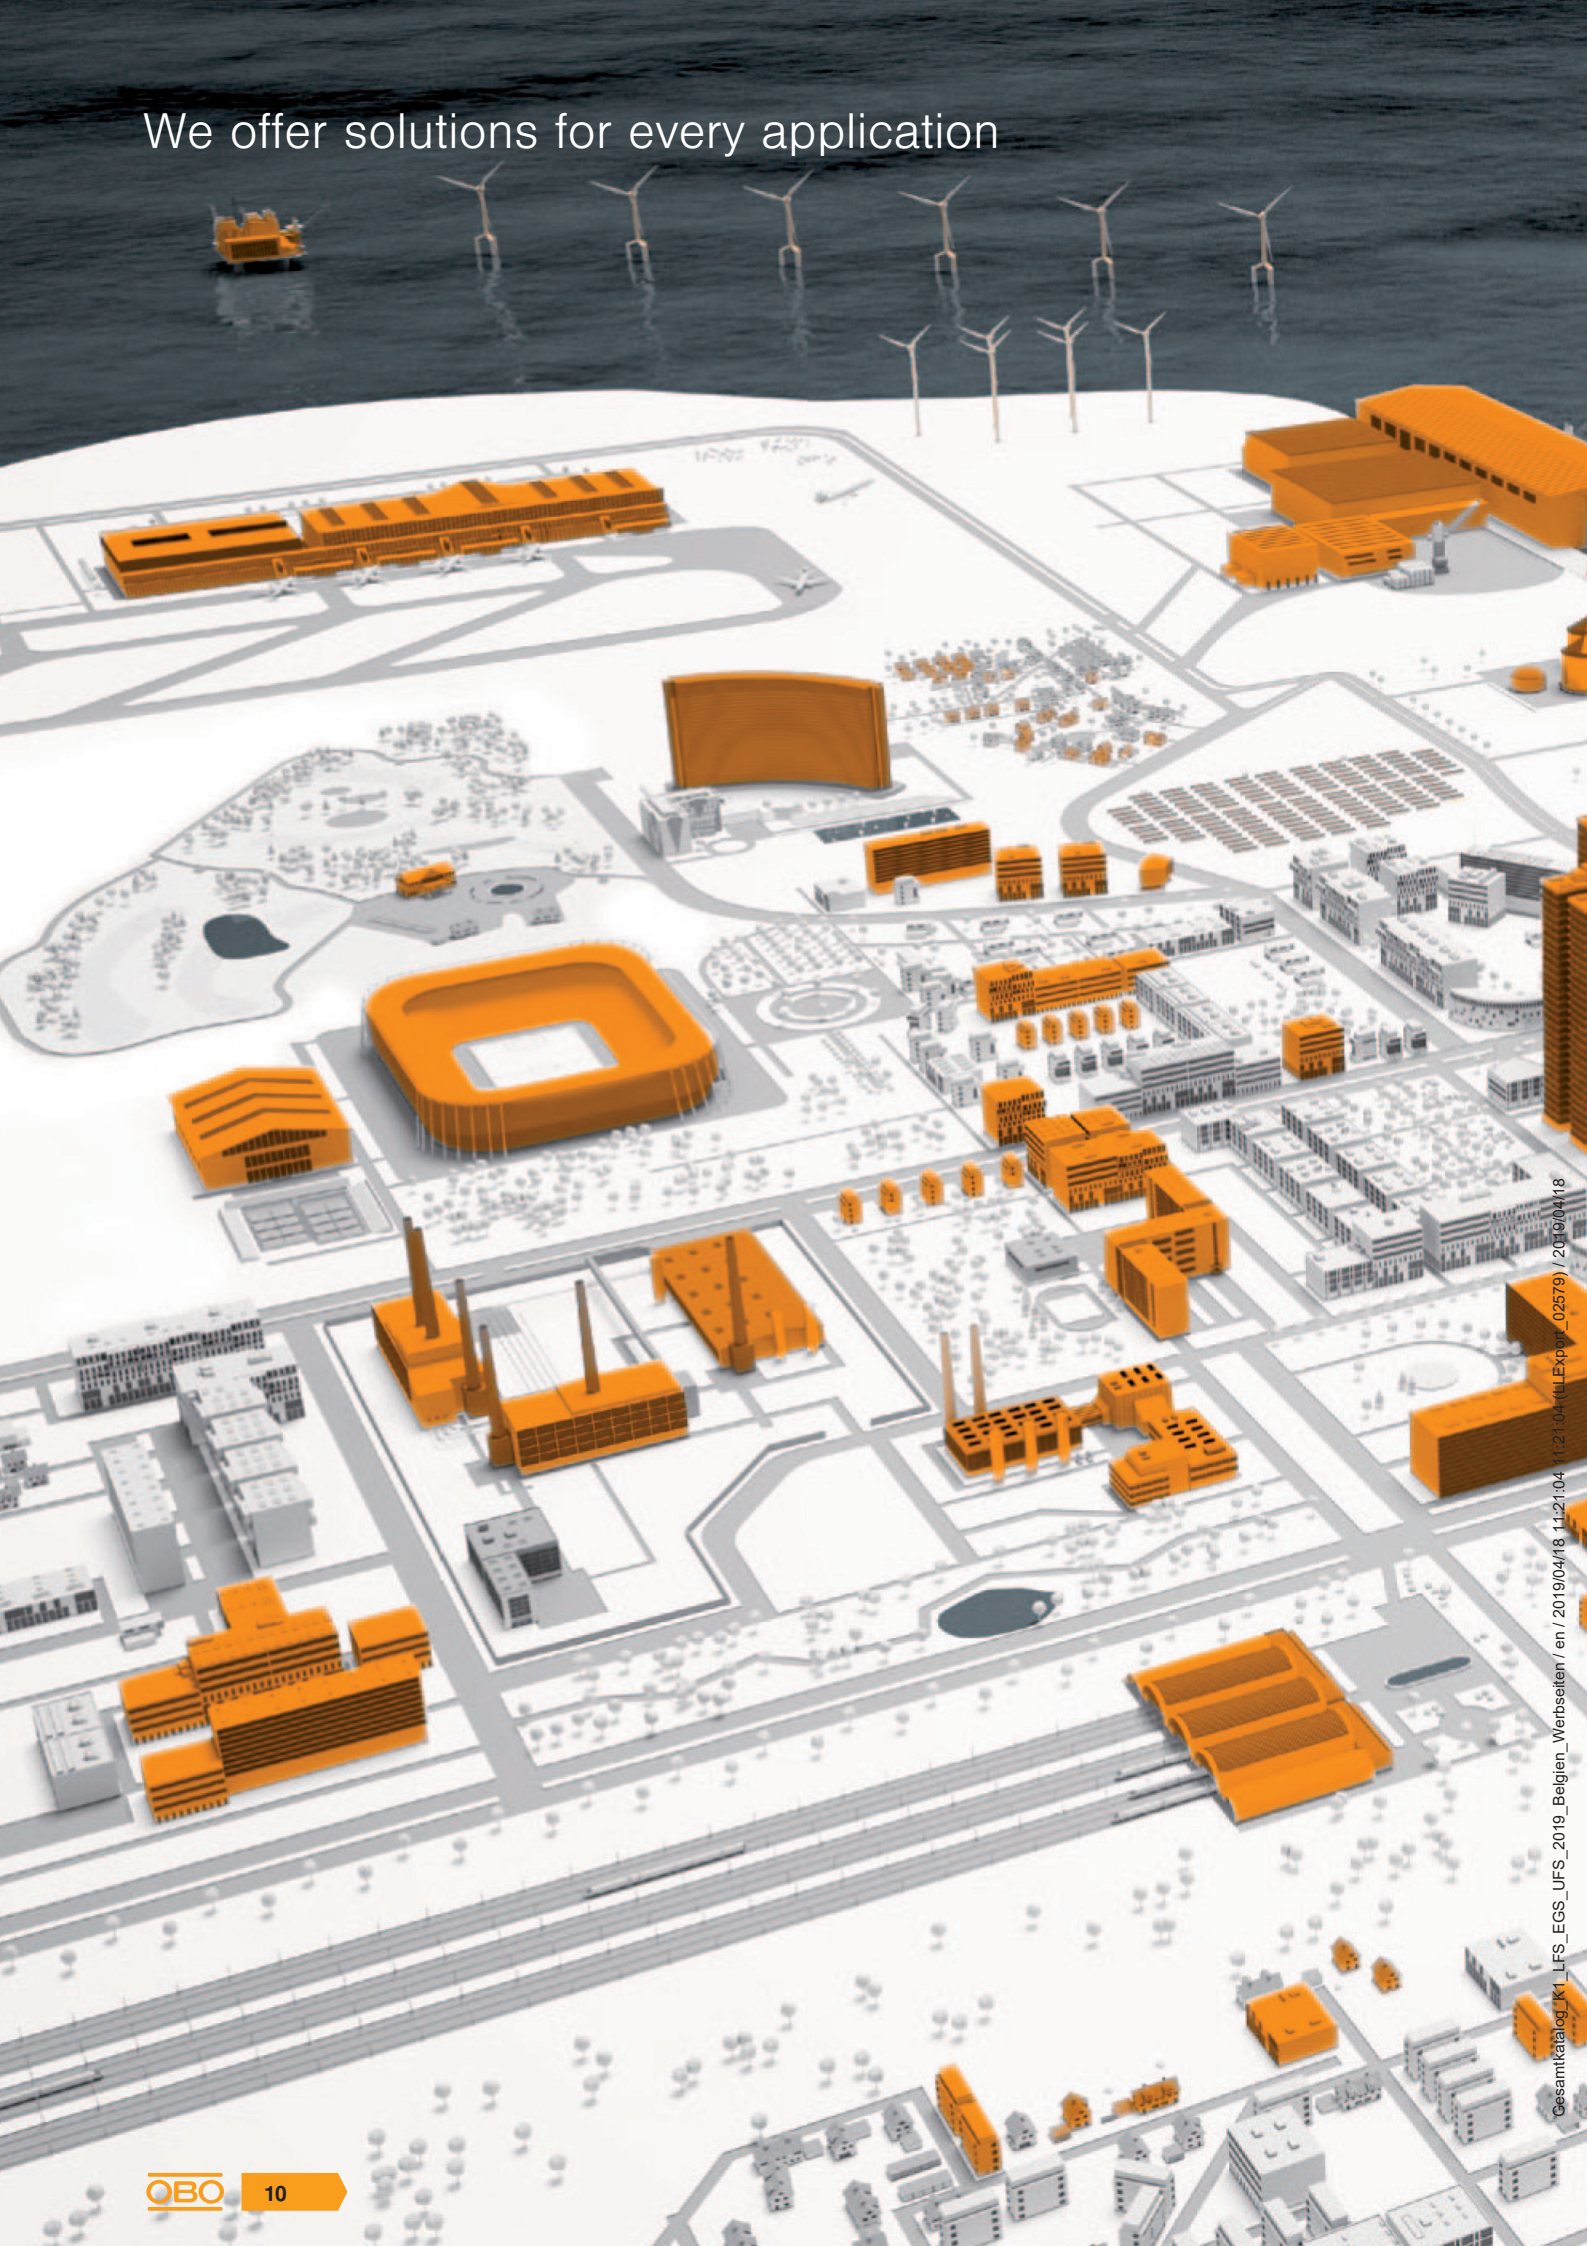

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

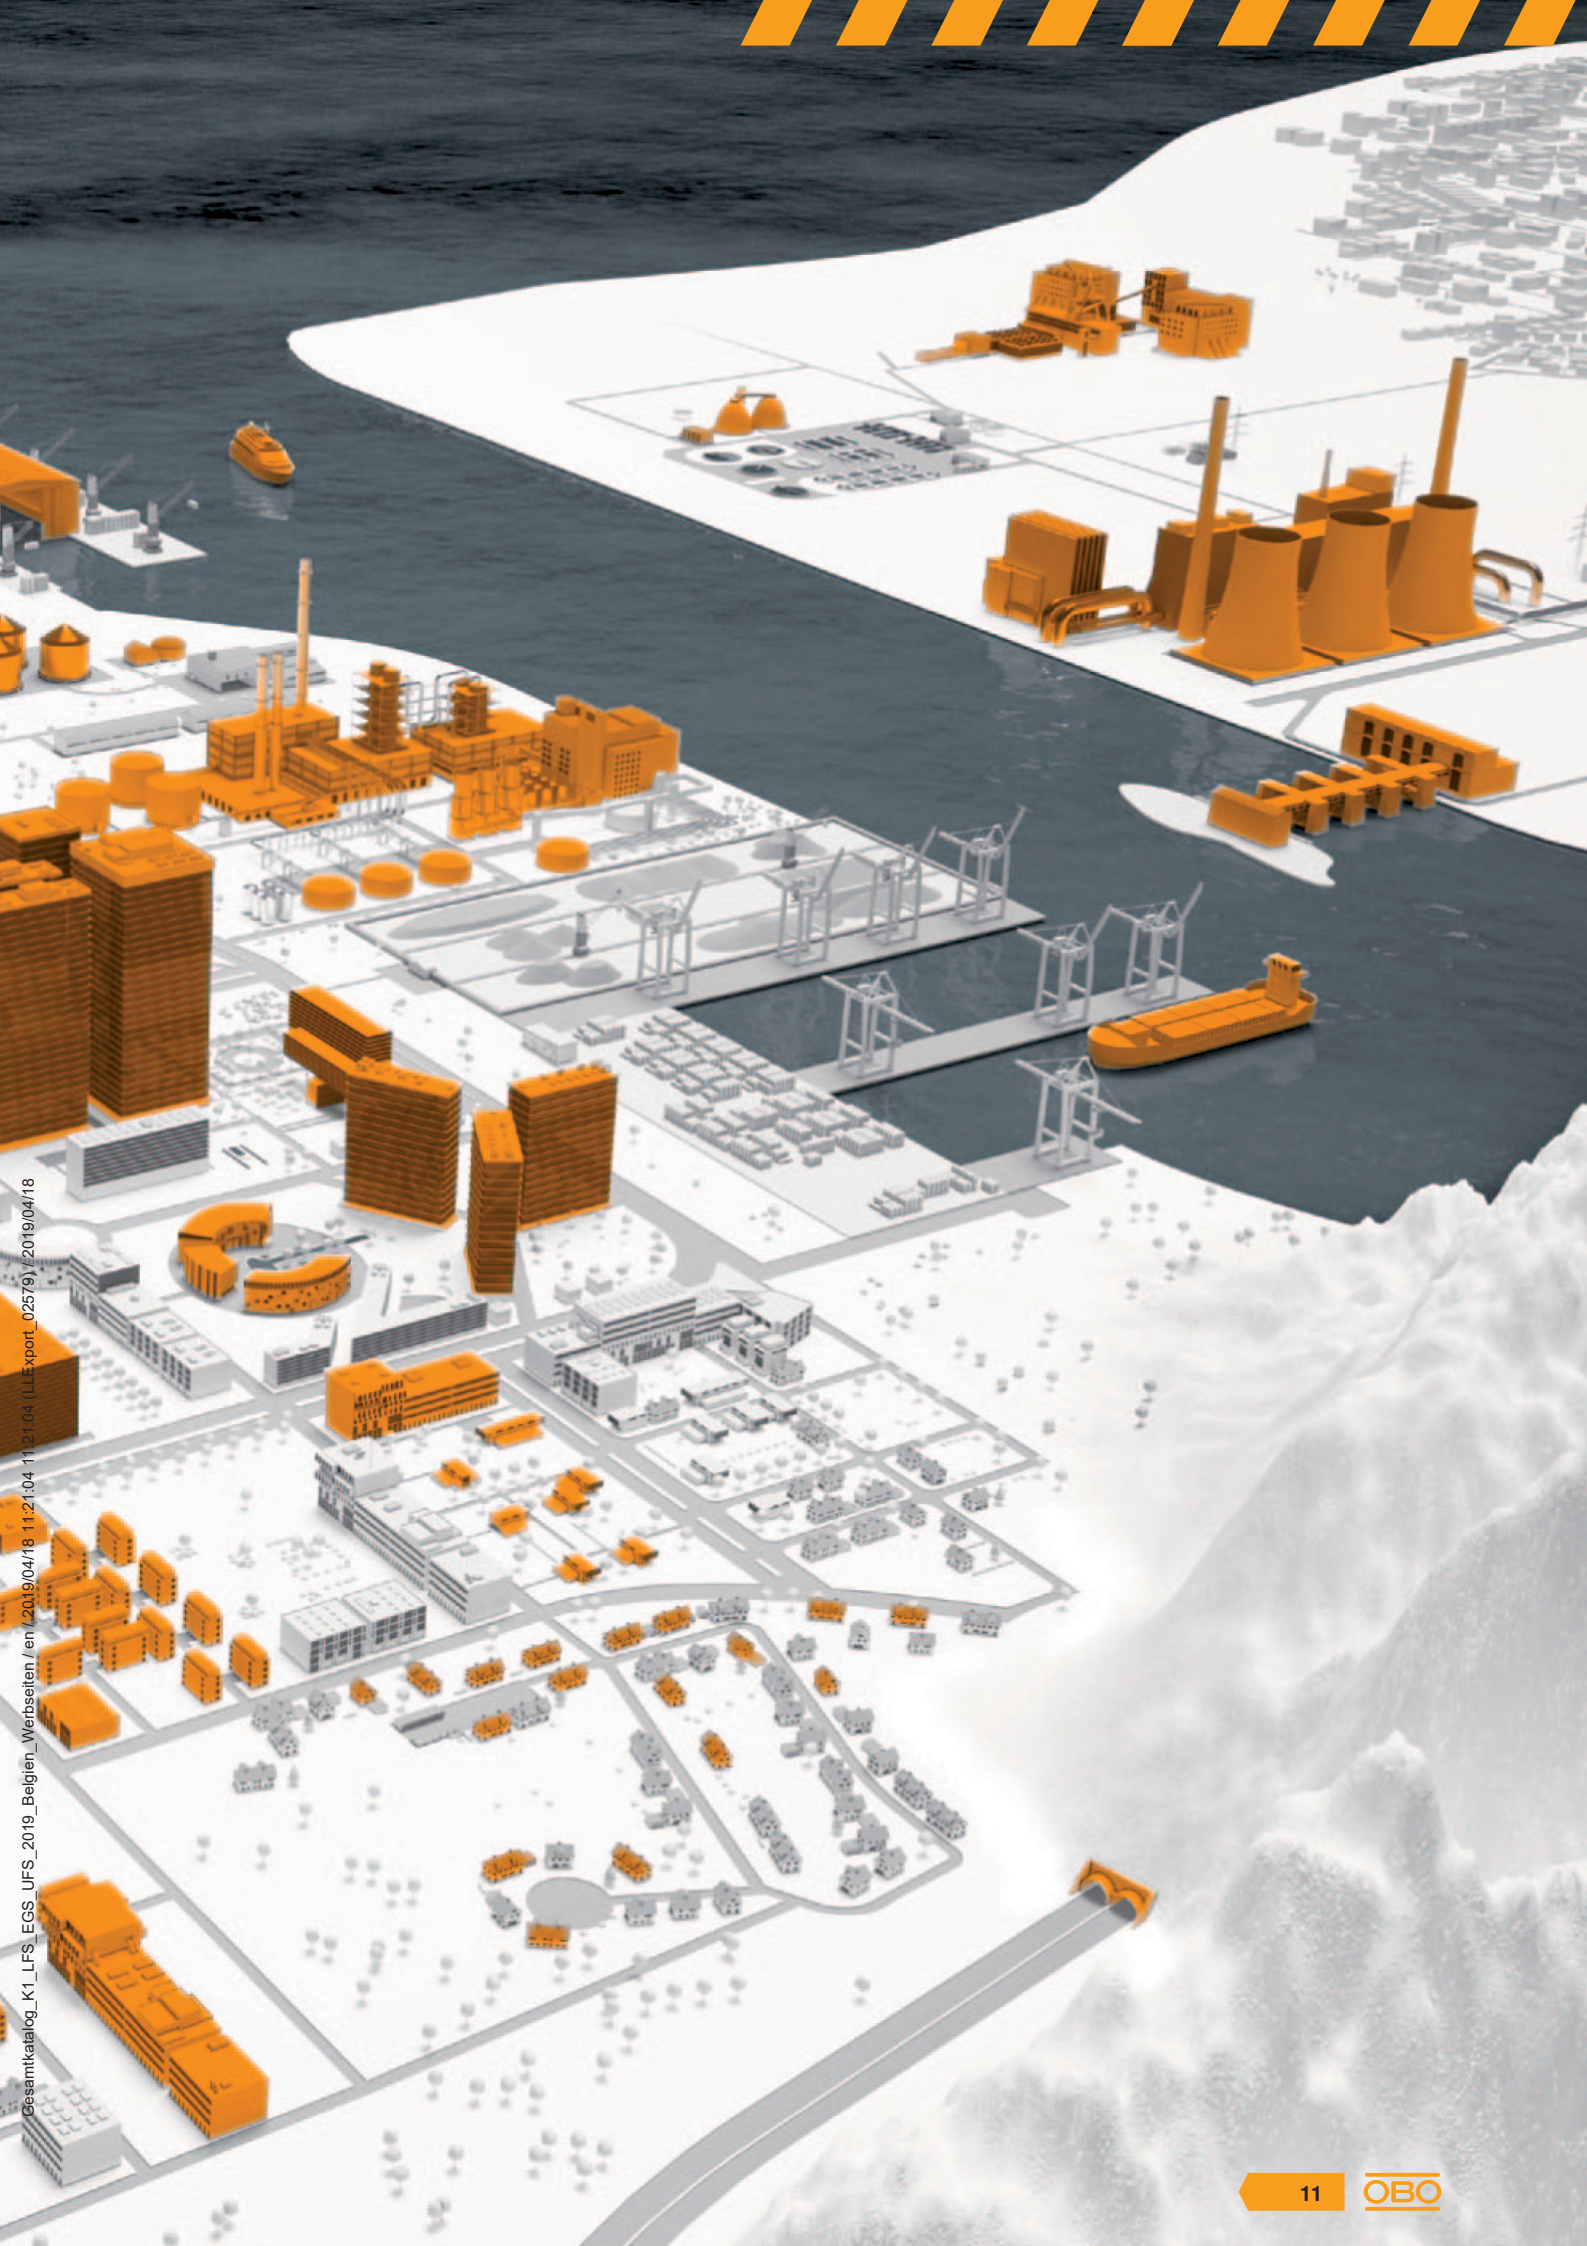

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18


Welcome to one of Europe's most advanced galvanising plants



At its Menden facilities, OBO operates one of Europe's most advanced hot galvanising plants. The zinc bath at the plant is 7.5 metres long, 3.5 metres deep and 1.4 metres wide, and contains up to 260 tons of zinc. The latest filter technologies and heat exchangers ensure that the production process uses resources such as gas, electricity, zinc and acid sustainably.

Hot galvanising means applying a metallic zinc coating to iron or steel. Individual parts, such as those used for electrical cable trays, are immersed in molten zinc at 450 degrees Celsius. A resistant alloy forms which provides protection against corrosion. OBO's unique way of treating galvanised goods, called 'passivation', prevents the formation of white rust.

Gesamtkatalog_ES-ETS_DE_2019_Seiten_Nr_Seiten_1_bis_1304_(LExport_02579) / 2019/04/18

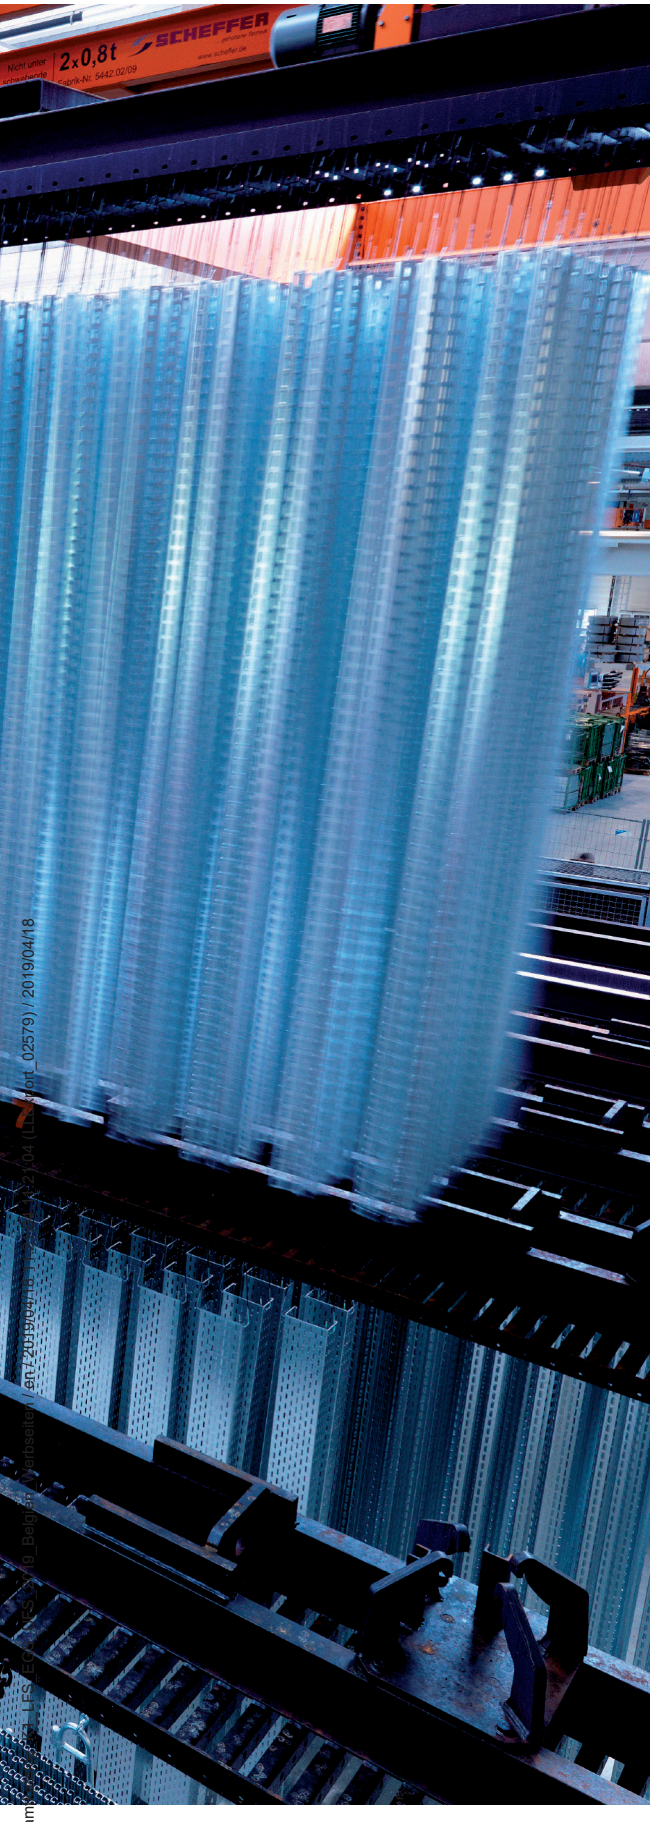





Gesamtprodukt_LESEN_2019_Belgien_Farbseiten (1.2019.04.18) 2019.04.23 14:04 (Layout_02579) / 2019/04/18

BET Test Centre

Where raw forces can be used sensibly.



Tested quality

The in-house BET Test Centre continually monitors and tests the quality of OBO products. Here, OBO simulates the loads that for example the mesh cable tray systems have to withstand on a constant basis. We determine the maximum load capacity and carrying capacity of the system, as well as its resistance to corrosion. We are able to prove standardised testing of EMC properties using test reports. In other words, OBO places paramount importance on safety.

Standard-compliant tests:

- Lightning protection components to EN 50164-1
- Spark gaps to EN 50164-3
- Surge protection devices to EN 61643-11
- Data cable protection devices to EN 61643-21
- Cable support systems to EN 61537
- Electrical installation duct systems to EN 50085-1
- Connection sockets and housings to EN 60670-1/-22
- Environmental testing to EN ISO 9227
- Environmental testing to EN 60068-2-52
- Environmental testing to EN ISO 6988
- Protection rating to EN 60592
- Tensile strength to EN 10002-1

However, customer-specific requirements and tests not covered by standards can be tested.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18








Certification

In development, manufacture and marketing, the products of OBO Bettermann are subject to high, standardised quality standards and international standards. For decades now, OBO Bettermann has operated ISO 9001-certified quality management. In addition, OBO has run certified energy management according to ISO 50001 and is a long-standing member of Industrieverband Feuerverzinken e.V.

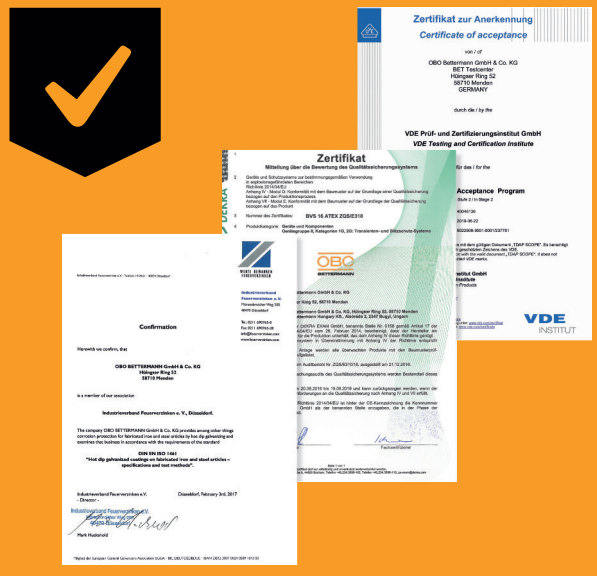

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

OBO CONSTRUCT
Planning software and product configurators

The OBO Construct programs are electronic planning aids – developed in order to support electrical engineers and planners in their planning of electrical installation projects.

Due to the systematic search of technically relevant planning parameters, these programs simplify the search for suitable products and the appropriate accessories.

All new OBO Construct apps have a responsive design. They can be opened on any device, independent from the operating system.

Advantages

- A tool that can be used in any place at any time
- Planning requirements can be transferred into complete product systems
- Suitable products can be found easily and quickly
- The correct quantity of products can be calculated automatically
- Configuration results can be downloaded as an Excel or Word file

Versions currently available

Cable support systems
AutoCAD Plug-in Version 3.0
(AutoCAD full version from 2013)

Underfloor systems
Planning Tool Version 3.0
(Web app for all devices)

Transient and lightning protection systems
Earthing Systems Version 1.0
(Web app for all devices)

Fire protection systems
Selection Aid Sealing Systems Version 2.5
(Web app, iOS and Android app)

Transient and lightning protection systems
Surge Protection Version 1.0
(Web app)

Cable support systems
Cable Filling Version 3.0
(Windows PC app)



Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten_01_2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

All programs in summary

Construct programs for the planning of sections as well as for the calculation of loads of cable support systems

- AutoCAD Add-in
- Cable filling



Construct online selection aids

- For the configuration of approval-compliant fire protection sealing systems
- For the calculation of lightning and surge protection systems
- For the construction of norm-conforming earthing systems



Construct planning software for underfloor systems

- Structured configuration of floor box types according to areas of use
- Equipping of the floor boxes with sockets and data technology



Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18



OBO Support Plus
Even more solutions for you

What is OBO Support Plus?
Every OBO product has a plus. Highly innovative quality products tested and manufactured to a high level of competence giving you complete confidence in the products you are selecting. In addition our technical specialists can assist you in product selection and training throughout the process of product selection through to installation.

Together with you, we plan your project, jointly choose the right products and are also available to you should you need us there with you. From flawless logistics through to practical information – we can provide support at every level. We can offer security through certificates on the conformity of our products with the most important standards and directives. We are as flexible as you are – because we know how practical people work and what is important to them. Each step is a plus – that is the OBO Support Plus concept.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18 11:21:04

OBO Support Plus
Even more solutions for you

Training



Service



Handling



Certification



Training courses from OBO
- Seminars and workshops
- Local consultation and training courses
- Planner days

Service – OBO can help
Everywhere and in every project phase:
- Competent hotline
- Product and system information, digital or printed
- Selection and planning aids on the web, as an app, as a CAD application or in printed form
- 2D and 3D product data for planning
- Field service, branch offices and subsidiary companies in 60 countries
- Engineering services for major projects

Handling – OBO delivers reliably
- With optimised delivery processes:
- Reliable logistics
- Practical transport systems and packaging
- Loading gear handling and disposal concepts

Certification and guarantee
OBO offers safety. Our products fulfil the most important country-specific regulations:
- Conformity (e.g. IEC, VDE, CE, KEMA, KEUR, UL)
- Certification (e.g. DIN EN, DGNB)
- 5-year warranty on surge protection products
- Guarantee management

Support

Contact our Customer Service department on:

+32 3 870 - 74 00

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18 11:21:04



Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.



Cable routing systems

Gesamtkatalog_K1_LFS_EGS_UFS_2019_englisch_Leerbseiten / en / 2019/04/18 11:21:04 / 11:21:04 (LLExport_02579) / 2019/04/18



Cable routing systems

WDK cable routing trunking systems, PVC

WDKH, cable routing trunking systems, halogen-free

LKM metal cable trunking systems

SKL skirting trunking systems

VK wiring trunking system

VKH wiring trunking, halogen-free

Rapid 45 plastic device installation trunking systems

Rapid 45-2 aluminium device installation trunking systems

Rapid 80 plastic device installation trunking systems

Rapid 80 plastic device installation trunking systems, halogen-free


Rapid 80 aluminium device installation trunking systems

Installation solutions for device installation trunking and service


ISS service pole systems

Modul 45® and standard – Installation solutions for device installation ducts and service poles

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/22 18:28:44 (LLExport_01579) / 2019/04/22


see page 20



see page 66


see page 76


see page 80


see page 82



see page 106


see page 112



see page 122



see page 130


see page 138


see page 144


see page 158


see page 162



see page 172

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/22 18:28:44 (LLExport_02579) / 2019/04/22

Mini trunking

Mini trunking with adhesive film and hinge cover MD4






Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDKMD4RW	Pure white	2000	224	3.300	**6150268**
WDKMD4CW	Cream	2000	224	3.300	**6150152**

PVC Polyvinylchloride

Mini trunking with adhesive film and hinge cover.

Mini trunking with adhesive film and hinge cover MD7






Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDKMD7RW	Pure white	2000	100	5.000	**6150276**
WDKMD7CW	Cream	2000	100	5.000	**6150160**

PVC Polyvinylchloride

Mini trunking with adhesive film and hinge cover.

Mini trunking with adhesive film and hinge cover MD12






Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDKMD12RW	Pure white	2000	80	7.000	**6150284**
WDKMD12CW	Cream	2000	80	7.000	**6150179**

PVC Polyvinylchloride

Mini trunking with adhesive film and hinge cover.

Mini trunking with adhesive film and hinge cover MD17





Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDKMD17RW	Pure white	2000	56	9.000	**6150292**
WDKMD17CW	Cream	2000	56	9.000	**6150187**


PVC Polyvinylchloride

Mini trunking with adhesive film and hinge cover.

Trunking height 10 mm, trunking width 20 mm

Trunking, type WDK 10020






Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK10020RW	Pure white	2000	96	10.000	**6150764**
WDK10020CW	Cream	2000	96	10.000	**6150756**

PVC Polyvinylchloride

Trunking cover and base with base perforation.

Joint cover





Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HS10020RW	Pure white	22	14	10	0.090	**6154026**
WDK HS10020CW	Cream	22	14	10	0.103	**6152007**

PVC Polyvinylchloride


Joint cover for smooth connection of trunking segments.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 (LLExport_02579) / 2019/04/25

Always indicate the item number when ordering.

Internal corner cover

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI10020RW	Pure white	30	4	0.285	**6154328**
WDK HI10020CW	Cream	30	4	0.285	**6153003**







PVC Polyvinylchloride

Internal corner cover for changing the direction of the WDK trunking.

External corner cover

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA10020RW	Pure white	30	4	0.344	**6154417**
WDK HA10020CW	Cream	30	4	0.600	**6153291**






PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.

Flat angle cover

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF10020RW	Pure white	40	4	0.365	**6154212**
WDK HF10020CW	Cream	40	4	0.365	**6152600**






PVC Polyvinylchloride

Flat angle hood for changing the direction of the WDK trunking.

T-piece cover

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HT10020RW	Pure white	45	4	0.334	**6154115**
WDK HT10020CW	Cream	45	4	0.334	**6152309**






PVC Polyvinylchloride

T-piece hood for changing the direction of the WDK trunking.

End piece

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE10020RW	Pure white	22	11	10	0.106	**6154514**
WDK HE10020CW	Cream	22	11	10	0.106	**6153593**





PVC Polyvinylchloride

End piece for closing the WDK trunking.


Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 (LLExport_02579) / 2019/04/25

Trunking height 10 mm, trunking width 30 mm

Trunking, type WDK 10030






Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK10030RW	Pure white	2000	64	13.000	**6150780**

PVC Polyvinylchloride

Trunking cover and base with base perforation.

Internal corner cover






Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI10030RW	Pure white	30	—	4	0.330	**6154336**

PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.

Flat angle cover






Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF10030RW	Pure white	50	—	4	0.555	**6154220**

PVC Polyvinylchloride

Flat angle hood for changing the direction of the WDK trunking.

T-piece cover






Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HT10030RW	Pure white	55	44	4	0.455	**6154123**

PVC Polyvinylchloride

T-piece hood for changing the direction of the WDK trunking.

End piece





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE10030RW	Pure white	10	0.139	**6154522**


PVC Polyvinylchloride

End piece to close the WDK trunking.

Trunking height 15 mm, trunking width 15 mm

Trunking, type WDK 15015





Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK15015RW	Pure white	2000	56	9.000	**6191002**
WDK15015CW	Cream	2000	56	9.000	**6024963**
WDK15015LGR	Light grey	2000	56	9.000	**6024947**
WDK15015GR	Stone grey	2000	56	9.000	**6024955**
WDK15015BR	Sepia brown	2000	56	9.000	**6024971**

PVC Polyvinylchloride

Trunking cover and base with base perforation.

Always indicate the item number when ordering.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 (LLExport_02579) / 2019/04/25

End piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE15015RW	Pure white	10	0.082	**6193099**
WDK HE15015CW	Cream	10	0.081	**6162495**
WDK HE15015LGR	Light grey	10	0.081	**6183603**
WDK HE15015GR	Stone grey	10	0.081	**6158692**

PVC Polyvinylchloride

End piece to close the WDK trunking.






Trunking, type WDK 15030

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK15030RW	Pure white	2000	32	19.500	**6191010**
WDK15030CW	Cream	2000	32	19.500	**6025013**
WDK15030GR	Stone grey	2000	32	19.500	**6025005**
WDK15030BR	Sepia brown	2000	32	19.500	**6025021**
WDK15030LGR	Light grey	2000	32	19.500	**6025048**

PVC Polyvinylchloride

Trunking cover and base with base perforation.






Joint cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HS15030RW	Pure white	32	14	10	0.136	**6193501**
WDK HS15030CW	Cream	32	14	10	0.136	**6152031**
WDK HS15030GR	Stone grey	32	14	10	0.136	**6158838**

PVC Polyvinylchloride

Joint cover for smooth connection of trunking segments.







Internal corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI15030RW	Pure white	38.5	—	4	0.789	**6191843**
WDK HI15030CW	Cream	38.5	—	4	0.790	**6160026**
WDK HI15030GR	Stone grey	38.5	—	4	0.790	**6158234**

PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.






External corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA15030RW	Pure white	38.5	—	4	1.114	**6192149**
WDK HA15030CW	Cream	38.5	—	4	1.096	**6160611**
WDK HA15030GR	Stone grey	38.5	—	4	1.114	**6158358**

PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.






Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 (LLExport_02579) / 2019/04/25

Trunking height 15 mm, trunking width 30 mm

Flat angle cover






Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF15030RW	Pure white	53	—	4	0.965	**6192750**
WDK HF15030CW	Cream	53	—	4	0.965	**6161219**
WDK HF15030GR	Stone grey	53	—	4	0.965	**6158595**

PVC Polyvinylchloride

Flat angle hood for changing the direction of the WDK trunking.

T-piece cover






Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HT15030RW	Pure white	73	53	4	1.119	**6192459**
WDK HT15030CW	Cream	73	53	4	1.119	**6161928**
WDK HT15030GR	Stone grey	73	53	4	1.119	**6158463**

PVC Polyvinylchloride

T-piece hood for changing the direction of the WDK trunking.

End piece





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE15030RW	Pure white	10	0.230	**6193102**
WDK HE15030CW	Cream	10	0.235	**6162517**
WDK HE15030GR	Stone grey	10	0.230	**6158714**


PVC Polyvinylchloride

End piece to close the WDK trunking.

Trunking height 15 mm, trunking width 40 mm

Trunking, type WDK 15040 with base perforation






Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK15040RW	Pure white	2000	36	23.000	**6191029**
WDK15040CW	Cream	2000	36	23.000	**6025161**
WDK15040GR	Stone grey	2000	36	23.000	**6025137**

PVC Polyvinylchloride

Trunking cover and base with base perforation.

Joint cover





Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HS15040RW	Pure white	42	14	10	0.190	**6193528**
WDK HS15040CW	Cream	42	14	10	0.190	**6152058**
WDK HS15040GR	Stone grey	42	14	10	0.190	**6158846**

PVC Polyvinylchloride


Joint cover for smooth connection of trunking segments.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 13:35:49 (LLExport_02579) / 2019/04/25

Always indicate the item number when ordering.

Internal corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI15040RW	Pure white	42	—	4	1.070	**6191851**
WDK HI15040CW	Cream	42	—	4	1.064	**6160034**
WDK HI15040GR	Stone grey	42	—	4	1.064	**6158242**






PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.

External corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA15040RW	Pure white	42	—	4	1.429	**6192157**
WDK HA15040CW	Cream	42	—	4	1.400	**6160638**
WDK HA15040GR	Stone grey	42	—	4	1.400	**6158366**






PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.

Flat angle cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF15040RW	Pure white	63	—	4	1.471	**6192769**
WDK HF15040CW	Cream	63	—	4	1.500	**6161227**
WDK HF15040GR	Stone grey	63	—	4	1.500	**6158609**






PVC Polyvinylchloride

Flat angle hood for changing the direction of the WDK trunking.

T-piece cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HT15040RW	Pure white	83	74	4	1.746	**6192467**
WDK HT15040CW	Cream	83	74	4	1.746	**6161936**
WDK HT15040GR	Stone grey	83	74	4	1.746	**6158471**






PVC Polyvinylchloride

T-piece hood for changing the direction of the WDK trunking.

End piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE15040RW	Pure white	10	0.299	**6193110**
WDK HE15040CW	Cream	10	0.299	**6162525**
WDK HE15040GR	Stone grey	10	0.299	**6158722**





PVC Polyvinylchloride

End piece to close the WDK trunking.


Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 (LLExport_02579) / 2019/04/25

Trunking height 20 mm, trunking width 20 mm

Trunking, type WDK 20020 with base perforation







Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK20020RW	Pure white	2000	48	11.100	6191037
WDK20020CW	Cream	2000	48	11.100	6025153
WDK20020LGR	Light grey	2000	48	11.100	6025102
WDK20020GR	Stone grey	2000	48	11.100	6025110
WDK20020BR	Sepia brown	2000	48	11.100	6025129

PVC Polyvinylchloride

Trunking cover and base with base perforation.

Internal corner cover






Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI20020RW	Pure white	38.5	—	4	0.619	6191878
WDK HI20020CW	Cream	38.5	—	4	0.623	6160018
WDK HI20020LGR	Light grey	38.5	—	4	0.623	6182011
WDK HI20020GR	Stone grey	38.5	—	4	0.623	6158226

PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.

External corner cover






Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA20020RW	Pure white	38.5	—	4	0.678	6192165
WDK HA20020CW	Cream	38.5	—	4	0.678	6160603
WDK HA20020LGR	Light grey	38.5	—	4	0.678	6182402
WDK HA20020GR	Stone grey	38.5	—	4	0.678	6158331

PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.

Flat angle cover






Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF20020RW	Pure white	38	—	4	0.588	6192777
WDK HF20020CW	Cream	38	—	4	0.596	6161200
WDK HF20020LGR	Light grey	38	—	4	0.596	6183212
WDK HF20020GR	Stone grey	38	—	4	0.596	6158587

PVC Polyvinylchloride

Flat angle cover for changing the direction of the WDK trunking.

T-piece cover





Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HT20020RW	Pure white	57	53.5	4	0.751	6192475
WDK HT20020CW	Cream	57	53.5	4	0.751	6161901
WDK HT20020LGR	Light grey	57	53.5	4	0.751	6182801
WDK HT20020GR	Stone grey	57	53.5	4	0.751	6158455

PVC Polyvinylchloride

T-piece hood for changing the direction of the WDK trunking.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 (LLExport_02579) / 2019/04/25

Always indicate the item number when ordering.


Trunking height 20 mm, trunking width 20 mm

End piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE20020RW	Pure white	10	0.103	**6193129**
WDK HE20020CW	Cream	10	0.101	**6162509**
WDK HE20020LGR	Light grey	10	0.101	**6183611**
WDK HE20020GR	Stone grey	10	0.101	**6158706**

PVC Polyvinylchloride

End piece to close the WDK trunking.






Trunking height 20 mm, trunking width 35 mm

Trunking, type WDK 20035

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK20035RW	Pure white	2000	32	23.900	**6191045**
WDK20035CW	Cream	2000	32	23.900	**6026370**
WDK20035GR	Stone grey	2000	32	23.900	**6026362**

PVC Polyvinylchloride

Trunking cover and base with base perforation.






End piece

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE20035RW	Pure white	35	20	10	0.334	**6193137**
WDK HE20035CW	Cream	35	20	10	0.334	**6162487**
WDK HE20035LGR	Light grey	35	20	10	0.334	**6183654**
WDK HE20035GR	Stone grey	35	20	10	0.334	**6158781**

PVC Polyvinylchloride

End piece to close the WDK trunking.






Trunking height 20 mm, trunking width 50 mm

Trunking, type WDK 20050

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK20050RW	Pure white	2000	42	30.700	**6168736**
WDK20050CW	Cream	2000	42	30.700	**6168701**

PVC Polyvinylchloride

Trunking cover and base with base perforation.







Trunking, type WDK-N 20050

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK-N20050RW	Pure white	2000	42	37.000	**6168744**

PVC Polyvinylchloride

Trunking cover and base with base perforation.






Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 (LLExport_02579) / 2019/04/25

Trunking height 20 mm, trunking width 50 mm

Internal corner cover






Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI20050RW	Pure white	45	—	4	1.277	**6154360**

PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.

External corner cover






Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA20050RW	Pure white	45	—	4	1.765	**6154468**

PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.

Flat angle cover






Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF20050RW	Pure white	73	—	4	1.948	**6154255**

PVC Polyvinylchloride

Flat angle hood for changing the direction of the WDK trunking.

T-piece cover






Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HT20050RW	Pure white	93	73	4	2.146	**6154166**

PVC Polyvinylchloride

T-piece hood for changing the direction of the WDK trunking.

End piece






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE20050RW	Pure white	10	0.425	**6154557**


PVC Polyvinylchloride

End piece to close the WDK trunking.

Trunking height 25 mm, trunking width 25 mm

Trunking, type WDK 25025





Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK25025RW	Pure white	2000	30	24.500	**6191053**
WDK25025CW	Cream	2000	30	24.500	**6026427**
WDK25025GR	Stone grey	2000	30	24.500	**6026419**

PVC Polyvinylchloride

Trunking cover and base with base perforation.

Always indicate the item number when ordering.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 (LLExport_02579) / 2019/04/25


Internal corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI25025CW	Cream	50	—	4	1.669	**6160042**
WDK HI25025GR	Stone grey	50	—	4	1.669	**6158250**

PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.






External corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA25025CW	Cream	52	—	4	1.424	**6160646**
WDK HA25025GR	Stone grey	52	—	4	1.424	**6158374**

PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.






Flat angle cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF25025CW	Cream	48	—	4	1.000	**6161235**
WDK HF25025GR	Stone grey	48	—	4	1.000	**6158617**

PVC Polyvinylchloride

Flat angle cover for changing the direction of the WDK trunking.






T-piece cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HT25025CW	Cream	68	48	4	1.171	**6161944**
WDK HT25025GR	Stone grey	68	48	4	1.171	**6158498**

PVC Polyvinylchloride

T-piece hood for changing the direction of the WDK trunking.






End piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE25025CW	Cream	10	0.303	**6162533**
WDK HE25025GR	Stone grey	10	0.303	**6158730**

PVC Polyvinylchloride

End piece to close the WDK trunking.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 (LLExport_02579) / 2019/04/25

Always indicate the item number when ordering.

Trunking height 25 mm, trunking width 40 mm

Trunking, type WDK 25040






Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK25040RW	Pure white	2000	24	30.000	**6191061**
WDK25040CW	Cream	2000	24	30.000	**6026451**
WDK25040GR	Stone grey	2000	24	30.000	**6026443**
WDK25040LGR	Light grey	2000	24	30.000	**6026486**

PVC Polyvinylchloride

Trunking cover and base with base perforation.

Joint cover







Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HS25040RW	Pure white	42	14	10	0.500	**6193560**

PVC Polyvinylchloride

Joint cover for smooth connection of trunking segments.

Internal corner cover






Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI25040RW	Pure white	50	—	4	1.502	**6191894**
WDK HI25040CW	Cream	50	—	4	1.489	**6160050**
WDK HI25040GR	Stone grey	50	—	4	1.489	**6158269**

PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.

External corner cover






Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA25040RW	Pure white	52	—	4	2.052	**6192181**
WDK HA25040CW	Cream	52	—	4	2.052	**6160654**
WDK HA25040GR	Stone grey	52	—	4	2.052	**6158382**

PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.

Flat angle cover





Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF25040RW	Pure white	63	—	4	1.905	**6192793**
WDK HF25040CW	Cream	63	—	4	1.905	**6161243**
WDK HF25040GR	Stone grey	63	—	4	1.905	**6158625**

PVC Polyvinylchloride

Flat angle hood for changing the direction of the WDK trunking.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 (LLExport_02579) / 2019/04/25

Always indicate the item number when ordering.


Trunking height 25 mm, trunking width 40 mm

T-piece cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HT25040RW	Pure white	83	63	4	1.994	**6192491**
WDK HT25040CW	Cream	83	63	4	1.994	**6161952**
WDK HT25040GR	Stone grey	83	63	4	1.994	**6158501**

PVC Polyvinylchloride

T-piece hood for changing the direction of the WDK trunking.






End piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE25040RW	Pure white	10	0.404	**6193153**
WDK HE25040CW	Cream	10	0.404	**6162541**
WDK HE25040GR	Stone grey	10	0.404	**6158749**

PVC Polyvinylchloride

End piece to close the WDK trunking.






Trunking height 30 mm, trunking width 30 mm

Trunking, type WDK 30030

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK30030RW	Pure white	2000	40	24.900	**6191096**
WDK30030CW	Cream	2000	40	24.900	**6026826**
WDK30030LGR	Light grey	2000	40	24.900	**6026796**
WDK30030GR	Stone grey	2000	40	24.900	**6026818**
WDK30030BR	Sepia brown	2000	40	24.900	**6026834**

PVC Polyvinylchloride

Trunking cover and base with base perforation.






Internal corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI30030RW	Pure white	52	—	4	1.345	**6191924**
WDK HI30030CW	Cream	52	—	4	1.200	**6160077**
WDK HI30030LGR	Light grey	52	—	4	1.349	**6182097**
WDK HI30030GR	Stone grey	52	—	4	1.200	**6158285**

PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.






External corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA30030RW	Pure white	57	—	4	1.776	**6192211**
WDK HA30030CW	Cream	57	—	4	1.809	**6160670**
WDK HA30030LGR	Light grey	57	—	4	1.809	**6182488**
WDK HA30030GR	Stone grey	57	—	4	1.809	**6158404**

PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.






Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 (LLExport_02579) / 2019/04/25

Trunking height 30 mm, trunking width 30 mm

Flat angle cover






Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF30030RW	Pure white	53	—	4	1.370	**6192815**
WDK HF30030CW	Cream	53	—	4	1.370	**6161278**
WDK HF30030GR	Stone grey	53	—	4	1.370	**6158641**
WDK HF30030LGR	Light grey	53	—	4	1.370	**6183298**

PVC Polyvinylchloride

Flat angle hood for changing the direction of the WDK trunking.

T-piece cover






Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HT30030RW	Pure white	50	39	4	1.542	**6192513**
WDK HT30030CW	Cream	50	39	4	1.485	**6161979**
WDK HT30030LGR	Light grey	50	39	4	1.485	**6182887**
WDK HT30030GR	Stone grey	50	39	4	1.485	**6158536**

PVC Polyvinylchloride

T-piece hood for changing the direction of the WDK trunking.

End piece





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE30030RW	Pure white	10	0.363	**6193188**
WDK HE30030CW	Cream	10	0.365	**6162576**
WDK HE30030LGR	Light grey	10	0.365	**6183697**
WDK HE30030GR	Stone grey	10	0.365	**6158765**


PVC Polyvinylchloride

End piece to close the WDK trunking.

Trunking height 30 mm, trunking width 45 mm

Trunking, type WDK 30045






Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK30045RW	Pure white	2000	48	32.000	**6191118**
WDK30045CW	Cream	2000	48	32.000	**6026869**
WDK30045LGR	Light grey	2000	48	32.000	**6026842**
WDK30045GR	Stone grey	2000	48	32.000	**6026850**

PVC Polyvinylchloride

Trunking cover and base with base perforation.

End piece





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE30045RW	Pure white	10	0.514	**6193196**
WDK HE30045CW	Cream	10	0.509	**6162584**
WDK HE30045LGR	Light grey	10	0.509	**6183700**
WDK HE30045GR	Stone grey	10	0.509	**6158803**

PVC Polyvinylchloride


End piece to close the WDK trunking.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 13:35:49 (LLExport_02579) / 2019/04/25

Always indicate the item number when ordering.

Trunking, type WDK 40040

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK40040RW	Pure white	2000	36	42.100	**6191126**
WDK40040CW	Cream	2000	36	42.100	**6025412**
WDK40040LGR	Light grey	2000	36	42.100	**6027016**
WDK40040GR	Stone grey	2000	36	42.100	**6025447**
WDK40040BR	Sepia brown	2000	36	42.100	**6025420**







PVC Polyvinylchloride

Trunking cover and base with base perforation.

Internal corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI40040RW	Pure white	65	—	4	2.502	**6191940**
WDK HI40040CW	Cream	65	—	4	2.502	**6160093**
WDK HI40040LGR	Light grey	65	—	4	2.502	**6182119**
WDK HI40040GR	Stone grey	65	—	4	2.502	**6158293**






PVC Polyvinylchloride

Internal corner cover for changing the direction of the WDK trunking.

External corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA40040RW	Pure white	66	—	4	3.139	**6192246**
WDK HA40040CW	Cream	66	—	4	3.139	**6160697**
WDK HA40040LGR	Light grey	66	—	4	3.139	**6182526**
WDK HA40040GR	Stone grey	66	—	4	3.139	**6158412**






PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.

T and intersection cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HT40040RW	Pure white	83	43	4	2.681	**6192548**
WDK HT40040CW	Cream	83	43	4	2.681	**6161995**
WDK HT40040LGR	Light grey	83	43	4	2.681	**6182917**
WDK HT40040GR	Stone grey	83	43	4	2.681	**6158544**






PVC Polyvinylchloride

T and crosspiece hood for changing the direction of the WDK trunking.

Flat angle cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF40040RW	Pure white	63	—	4	2.534	**6192831**
WDK HF40040CW	Cream	63	—	4	2.534	**6161294**
WDK HF40040LGR	Light grey	63	—	4	2.534	**6183336**
WDK HF40040GR	Stone grey	63	—	4	2.534	**6158668**





PVC Polyvinylchloride

Flat angle cover for changing the direction of the WDK trunking.


Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 (LLExport_02579) / 2019/04/25

Trunking height 40 mm, trunking width 40 mm

End piece





Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE40040RW	Pure white	40	40	10	0.602	**6193218**
WDK HE40040CW	Cream	40	40	10	0.615	**6162592**
WDK HE40040LGR	Light grey	40	40	10	0.602	**6183727**
WDK HE40040GR	Stone grey	40	40	10	0.602	**6158773**


PVC Polyvinylchloride

End piece to close the WDK trunking.

Trunking height 40 mm, trunking width 60 mm

Trunking, type WDK 40060







Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK40060RW	Pure white	2000	24	56.200	**6191134**
WDK40060CW	Cream	2000	24	56.200	**6020887**
WDK40060LGR	Light grey	2000	24	56.200	**6027024**
WDK40060GR	Stone grey	2000	24	56.200	**6025633**
WDK40060BR	Sepia brown	2000	24	56.200	**6025617**

PVC Polyvinylchloride

Trunking cover and base with base perforation.
Four cover fixing devices included.

Internal corner cover







Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI40060RW	Pure white	110	—	2	7.363	**6191959**
WDK HI40060CW	Cream	110	—	2	7.363	**6160107**
WDK HI40060LGR	Light grey	110	—	2	7.363	**6182127**
WDK HI40060GR	Stone grey	110	—	2	7.363	**6021719**

PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.
Fittings are generally designed as cover fittings.

External corner cover





Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA40060RW	Pure white	100	—	2	8.653	**6192254**
WDK HA40060CW	Cream	100	—	2	8.653	**6160700**
WDK HA40060LGR	Light grey	100	—	2	8.653	**6182534**
WDK HA40060GR	Stone grey	100	—	2	8.653	**6021697**

PVC Polyvinylchloride


External corner hood for changing the direction of the WDK trunking.
Fittings are generally designed as cover fittings.

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 (LLExport_02579) / 2019/04/25

T and intersection cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK40060RW	Pure white	190	63	2	9.801	**6192556**
WDK HK40060CW	Cream	190	63	2	9.801	**6162002**
WDK HK40060LGR	Light grey	190	63	2	9.801	**6182925**
WDK HK40060GR	Stone grey	190	63	2	9.801	**6023312**






PVC Polyvinylchloride

T and crosspiece hood for changing the direction of the WDK trunking.

Fittings are generally designed as hood/cover fittings.

Flat angle cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF40060RW	Pure white	101	—	2	6.271	**6192858**
WDK HF40060CW	Cream	101	—	2	6.271	**6161308**
WDK HF40060LGR	Light grey	101	—	2	6.271	**6183344**
WDK HF40060GR	Stone grey	101	—	2	6.271	**6021735**






PVC Polyvinylchloride

Flat angle hood for changing the direction of the WDK trunking.

Fittings are generally designed as hood/cover fittings.

End piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE40060RW	Pure white	10	1.136	**6193226**
WDK HE40060CW	Cream	10	1.147	**6162606**
WDK HE40060LGR	Light grey	10	1.148	**6183735**
WDK HE40060GR	Stone grey	10	1.144	**6021492**






PVC Polyvinylchloride


End piece to close the WDK trunking.

The end pieces are pushed onto the trunking and kept in place by the spring action.

Trunking, type WDK 40090

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK40090RW	Pure white	2000	32	77.300	**6191142**
WDK40090CW	Cream	2000	32	77.300	**6020895**
WDK40090LGR	Light grey	2000	32	77.300	**6027032**
WDK40090GR	Stone grey	2000	32	77.300	**6021018**






PVC Polyvinylchloride

Trunking cover and base with base perforation.

Four cover clips included

Joint cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HS40090RW	Pure white	90	39	20	0.857	**6193580**
WDK HS40090CW	Cream	90	39	20	0.857	**6193582**





PVC Polyvinylchloride

Joint cover for hiding cut edges and for smooth connection of trunking segments.


Fittings are generally designed as hood/cover fittings.


Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 (LLExport_02579) / 2019/04/25

Trunking height 40 mm, trunking width 90 mm

Internal corner cover






Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI40090RW	Pure white	109	—	2	9.468	**6191967**
WDK HI40090CW	Cream	109	—	2	9.468	**6160115**
WDK HI40090LGR	Light grey	109	—	2	9.468	**6182135**
WDK HI40090GR	Stone grey	109	—	2	9.468	**6021190**

PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.
Fittings are generally designed as cover fittings.

External corner cover






Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA40090RW	Pure white	100	—	2	9.638	**6192262**
WDK HA40090CW	Cream	100	—	2	9.638	**6160719**
WDK HA40090LGR	Light grey	100	—	2	9.638	**6182542**
WDK HA40090GR	Stone grey	100	—	2	9.638	**6021093**

PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.
Fittings are generally designed as cover fittings.

T and intersection cover






Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK40090RW	Pure white	230	91	2	13.986	**6192564**
WDK HK40090CW	Cream	230	91	2	13.986	**6162010**
WDK HK40090LGR	Light grey	230	91	2	13.986	**6182933**
WDK HK40090GR	Stone grey	230	91	2	13.986	**6023142**

PVC Polyvinylchloride

T and crosspiece hood for changing the direction of the WDK trunking.
Fittings are generally designed as hood/cover fittings.

Flat angle cover





Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF40090RW	Pure white	129	—	2	11.246	**6192866**
WDK HF40090CW	Cream	129	—	2	11.246	**6161316**
WDK HF40090LGR	Light grey	129	—	2	11.246	**6183352**
WDK HF40090GR	Stone grey	129	—	2	11.246	**6021336**

PVC Polyvinylchloride


Flat angle hood for changing the direction of the WDK trunking.
Fittings are generally designed as hood/cover fittings.

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 (LLExport_02579) / 2019/04/25

End piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE40090RW	Pure white	10	1.576	**6193234**
WDK HE40090CW	Cream	10	1.576	**6162614**
WDK HE40090LGR	Light grey	10	1.566	**6183743**
WDK HE40090GR	Stone grey	10	1.576	**6021506**






PVC Polyvinylchloride

End piece to close the WDK trunking.

The end pieces are pushed onto the trunking and kept in place by the spring action.

Trunking, type WDK 40110

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK40110RW	Pure white	2000	24	111.800	**6191150**
WDK40110CW	Cream	2000	24	111.800	**6020909**
WDK40110LGR	Light grey	2000	24	111.800	**6027040**
WDK40110GR	Stone grey	2000	24	111.800	**6021034**






PVC Polyvinylchloride

Trunking cover and base with base perforation.

Four cover clips included

Joint cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HS40110RW	Pure white	110	39	20	1.100	**6193586**
WDK HS40110CW	Cream	110	39	20	1.100	**6193588**






PVC Polyvinylchloride


Joint cover for hiding cut edges and for smooth connection of trunking segments.

Fittings are generally designed as hood/cover fittings.

Internal corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI40110RW	Pure white	110.5	—	2	9.726	**6191975**
WDK HI40110CW	Cream	110.5	—	2	9.726	**6160123**
WDK HI40110LGR	Light grey	110.5	—	2	9.726	**6182143**
WDK HI40110GR	Stone grey	110.5	—	2	9.726	**6021727**






PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.

Fittings are generally designed as cover fittings.

External corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA40110RW	Pure white	100	—	2	13.500	**6192270**
WDK HA40110CW	Cream	100	—	2	13.500	**6160727**
WDK HA40110LGR	Light grey	100	—	2	13.500	**6182550**
WDK HA40110GR	Stone grey	100	—	2	13.500	**6021700**





PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.

Fittings are generally designed as cover fittings.


Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 (LLExport_02579) / 2019/04/25

Trunking height 40 mm, trunking width 110 mm

T and intersection cover






Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK40110RW	Pure white	272	112	2	18.882	**6192572**
WDK HK40110CW	Cream	272	112	2	18.882	**6162029**
WDK HK40110LGR	Light grey	272	112	2	18.882	**6182941**
WDK HK40110GR	Stone grey	272	112	2	18.882	**6023339**

PVC Polyvinylchloride

T and intersection cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood/cover fittings.

Flat angle cover






Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF40110RW	Pure white	110	—	2	13.000	**6192874**
WDK HF40110CW	Cream	110	—	2	13.000	**6161324**
WDK HF40110LGR	Light grey	110	—	2	13.000	**6183360**
WDK HF40110GR	Stone grey	110	—	2	11.751	**6021743**

PVC Polyvinylchloride

Flat angle hood for changing the direction of the WDK trunking.
Fittings are generally designed as hood/cover fittings.

End piece





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE40110RW	Pure white	10	1.919	**6193242**
WDK HE40110CW	Cream	10	1.859	**6162622**
WDK HE40110LGR	Light grey	10	1.859	**6183751**
WDK HE40110GR	Stone grey	10	1.859	**6021514**


PVC Polyvinylchloride

End piece to close the WDK trunking.
The end pieces are pushed onto the trunking and kept in place by the spring action.

Trunking height 60 mm, trunking width 60 mm

Trunking, type WDK 60060





Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK60060RW	Pure white	2000	32	81.600	**6191193**
WDK60060CW	Cream	2000	32	81.600	**6021948**
WDK60060LGR	Light grey	2000	32	81.600	**6027105**
WDK60060GR	Stone grey	2000	32	81.600	**6025668**

PVC Polyvinylchloride


Trunking cover and base with base perforation.
Four cover clips included


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 (LLExport_02579) / 2019/04/25

Always indicate the item number when ordering.

Internal corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI60060RW	Pure white	130	—	2	10.932	**6192017**
WDK HI60060CW	Cream	130	—	2	10.932	**6160301**
WDK HI60060LGR	Light grey	130	—	2	10.932	**6182194**
WDK HI60060GR	Stone grey	130	—	2	10.932	**6022383**






PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.

Fittings are generally designed as cover fittings.

External corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA60060RW	Pure white	100	—	2	9.931	**6192319**
WDK HA60060CW	Cream	100	—	2	9.931	**6160905**
WDK HA60060LGR	Light grey	100	—	2	9.931	**6182593**
WDK HA60060GR	Stone grey	100	—	2	9.931	**6022073**






PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.

Fittings are generally designed as cover fittings.

T and intersection cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK60060RW	Pure white	190	65	2	12.876	**6192610**
WDK HK60060CW	Cream	190	65	2	12.876	**6162207**
WDK HK60060LGR	Light grey	190	65	2	12.876	**6183018**
WDK HK60060GR	Stone grey	190	65	2	12.876	**6023223**






PVC Polyvinylchloride

T and intersection cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.

Flat angle cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF60060RW	Pure white	101	—	2	7.846	**6192912**
WDK HF60060CW	Cream	101	—	2	8.016	**6161502**
WDK HF60060LGR	Light grey	101	—	2	8.243	**6183409**
WDK HF60060GR	Stone grey	101	—	2	8.016	**6022448**





PVC Polyvinylchloride

Flat angle hood for changing the direction of the WDK trunking.

Fittings are generally designed as hood/cover fittings.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 (LLExport_02579) / 2019/04/25

Always indicate the item number when ordering.

Trunking height 60 mm, trunking width 60 mm

End piece





Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE60060RW	Pure white	60	60	10	1.551	**6193285**
WDK HE60060CW	Cream	60	60	10	1.551	**6162800**
WDK HE60060LGR	Light grey	60	60	10	1.551	**6183808**
WDK HE60060GR	Stone grey	60	60	10	1.544	**6022499**


PVC Polyvinylchloride


End piece to close the WDK trunking.

The end pieces are pushed onto the trunking and kept in place by the spring action.

Trunking height 60 mm, trunking width 90 mm

Trunking, type WDK 60090





Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK60090RW	Pure white	2000	24	110.000	**6191207**
WDK60090CW	Cream	2000	24	110.000	**6021913**
WDK60090LGR	Light grey	2000	24	110.000	**6027113**
WDK60090GR	Stone grey	2000	24	110.000	**6022006**


PVC Polyvinylchloride

Trunking cover and base with base perforation.

Four cover fixing devices included.

Joint cover






Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HS60090RW	Pure white	94	18	20	1.002	**6193590**
WDK HS60090CW	Cream	94	18	20	1.008	**6193592**


PVC Polyvinylchloride

Joint cover for hiding cut edges and for smooth connection of trunking segments.

Fittings are generally designed as hood/cover fittings.

Internal corner cover





Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI60090RW	Pure white	130	—	2	12.989	**6192025**
WDK HI60090CW	Cream	130	—	2	12.989	**6160328**
WDK HI60090LGR	Light grey	130	—	2	12.989	**6182208**
WDK HI60090GR	Stone grey	130	—	2	12.989	**6022219**

PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.


Fittings are generally designed as cover fittings.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 (LLExport_02579) / 2019/04/25

Always indicate the item number when ordering.

External corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA60090RW	Pure white	100	—	2	10.965	**6192327**
WDK HA60090CW	Cream	100	—	2	10.965	**6160913**
WDK HA60090LGR	Light grey	100	—	2	10.965	**6182607**
WDK HA60090GR	Stone grey	100	—	2	10.965	**6022111**






PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.

Fittings are generally designed as cover fittings.

T and intersection cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK60090RW	Pure white	230	65	2	16.992	**6192629**
WDK HK60090CW	Cream	230	65	2	16.992	**6162215**
WDK HK60090LGR	Light grey	230	65	2	16.992	**6183026**
WDK HK60090GR	Stone grey	230	65	2	16.992	**6023002**






PVC Polyvinylchloride

T and intersection cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.

Flat angle cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF60090RW	Pure white	129	—	2	11.454	**6192920**
WDK HF60090CW	Cream	129	—	2	11.454	**6161510**
WDK HF60090LGR	Light grey	129	—	2	11.454	**6183417**
WDK HF60090GR	Stone grey	129	—	2	11.454	**6022316**






PVC Polyvinylchloride

Flat angle hood for changing the direction of the WDK trunking.

Fittings are generally designed as hood/cover fittings.

End piece

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE60090RW	Pure white	90	60	10	2.315	**6193293**
WDK HE60090CW	Cream	90	60	10	2.337	**6162819**
WDK HE60090LGR	Light grey	90	60	10	2.337	**6183816**
WDK HE60090GR	Stone grey	90	60	10	2.337	**6022502**





PVC Polyvinylchloride

End piece to close the WDK trunking.

The end pieces are pushed onto the trunking and kept in place by the spring action.


Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 (LLExport_02579) / 2019/04/25

Trunking height 60 mm, trunking width 110 mm, device installation

Trunking, type WDK 60110






Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK60110RW	Pure white	2000	16	117.000	6191215
WDK60110CW	Cream	2000	16	117.000	6021840
WDK60110LGR	Light grey	2000	16	117.000	6027121
WDK60110GR	Stone grey	2000	16	117.000	6022014

PVC Polyvinylchloride

Trunking cover and base with base perforation.
Four cover fixing devices included.

Joint cover







Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HS60110RW	Pure white	113	18	20	1.142	6193596
WDK HS60110CW	Cream	113	18	20	1.142	6193598

PVC Polyvinylchloride

Joint cover for hiding cut edges and for smooth connection of trunking segments.
Fittings are generally designed as hood/cover fittings.

Internal corner cover






Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI60110RW	Pure white	130	—	2	13.254	6192033
WDK HI60110CW	Cream	130	—	2	13.312	6160336
WDK HI60110LGR	Light grey	130	—	2	13.102	6182216
WDK HI60110GR	Stone grey	130	—	2	13.312	6022235

PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.
Fittings are generally designed as cover fittings.

External corner cover






Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA60110RW	Pure white	100	—	2	13.226	6192335
WDK HA60110CW	Cream	100	—	2	13.017	6160921
WDK HA60110LGR	Light grey	100	—	2	13.226	6182615
WDK HA60110GR	Stone grey	100	—	2	13.049	6022146

PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.
Fittings are generally designed as cover fittings.

T and intersection cover





Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK60110RW	Pure white	272	65	2	22.905	6192637
WDK HK60110CW	Cream	272	65	2	22.905	6162223
WDK HK60110LGR	Light grey	272	65	2	22.905	6183034
WDK HK60110GR	Stone grey	272	65	2	22.905	6023029

PVC Polyvinylchloride


T and intersection cover for changing the direction of the WDK trunking.
Fittings are generally designed as hood fittings.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 13:35:49 (LLExport_02579) / 2019/04/25

Always indicate the item number when ordering.

Flat angle cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF60110RW	Pure white	149	—	2	14.273	**6192939**
WDK HF60110CW	Cream	149	—	2	14.399	**6161529**
WDK HF60110LGR	Light grey	149	—	2	14.399	**6183425**
WDK HF60110GR	Stone grey	149	—	2	14.399	**6022332**






PVC Polyvinylchloride

Flat angle hood for changing the direction of the WDK trunking.

Fittings are generally designed as hood/cover fittings.

End piece

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE60110RW	Pure white	110	60	10	2.937	**6193307**
WDK HE60110CW	Cream	110	60	10	2.934	**6162827**
WDK HE60110LGR	Light grey	110	60	10	2.912	**6183824**
WDK HE60110GR	Stone grey	110	60	10	2.951	**6022588**






PVC Polyvinylchloride

End piece for closing the WDK trunking.

The end pieces are pushed onto the trunking and kept in place by the spring action.

Trunking, type WDK 60130

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK60130RW	Pure white	2000	16	135.000	**6191223**
WDK60130CW	Cream	2000	16	135.000	**6021859**
WDK60130LGR	Light grey	2000	16	135.000	**6027148**
WDK60130GR	Stone grey	2000	16	135.000	**6022022**






PVC Polyvinylchloride

Trunking cover and base with base perforation.

Four cover fixing devices included.

Internal corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI60130RW	Pure white	130	—	2	13.526	**6192041**
WDK HI60130CW	Cream	130	—	2	13.526	**6160344**
WDK HI60130LGR	Light grey	130	—	2	13.526	**6182224**
WDK HI60130GR	Stone grey	130	—	2	13.526	**6022251**





PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.

Fittings are generally designed as cover fittings.


Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 (LLExport_02579) / 2019/04/25

Trunking height 60 mm, trunking width 130 mm, device installation

External corner cover





Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA60130RW	Pure white	100	—	2	14.327	**6192343**
WDK HA60130CW	Cream	100	—	2	14.327	**6160948**
WDK HA60130LGR	Light grey	100	—	2	14.327	**6182623**
WDK HA60130GR	Stone grey	100	—	2	14.327	**6022162**


PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.

Fittings are generally designed as cover fittings.

T and intersection cover





Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK60130RW	Pure white	272	65	2	23.968	**6192645**
WDK HK60130CW	Cream	272	65	2	23.968	**6162231**
WDK HK60130LGR	Light grey	272	65	2	23.968	**6183042**
WDK HK60130GR	Stone grey	272	65	2	23.968	**6023045**


PVC Polyvinylchloride

T and intersection cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.

Flat angle cover





Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF60130RW	Pure white	170	—	2	17.118	**6192947**
WDK HF60130CW	Cream	170	—	2	17.272	**6161537**
WDK HF60130LGR	Light grey	170	—	2	17.272	**6183433**
WDK HF60130GR	Stone grey	170	—	2	17.272	**6022359**


PVC Polyvinylchloride

Flat angle hood for changing the direction of the WDK trunking.

Fittings are generally designed as hood/cover fittings.

End piece





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE60130RW	Pure white	10	3.610	**6193315**
WDK HE60130CW	Cream	10	3.596	**6162835**
WDK HE60130LGR	Light grey	10	3.655	**6183832**
WDK HE60130GR	Stone grey	10	3.578	**6022529**

PVC Polyvinylchloride

End piece to close the WDK trunking.


The end pieces are pushed onto the trunking and kept in place by the spring action.

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 (LLExport_02579) / 2019/04/25

Trunking, type WDK 60150

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK60150RW	Pure white	2000	8	175.000	**6191231**
WDK60150CW	Cream	2000	8	175.000	**6021883**
WDK60150LGR	Light grey	2000	8	175.000	**6027156**
WDK60150GR	Stone grey	2000	8	175.000	**6022030**






PVC Polyvinylchloride

Trunking cover and base with base perforation.

Four cover fixing devices included.

Internal corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI60150RW	Pure white	130	—	2	14.449	**6192068**
WDK HI60150CW	Cream	130	—	2	14.449	**6160379**
WDK HI60150LGR	Light grey	130	—	2	14.449	**6182232**
WDK HI60150GR	Stone grey	130	—	2	14.449	**6024432**






PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.

Fittings are generally designed as cover fittings.

External corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA60150RW	Pure white	100	—	2	17.452	**6192351**
WDK HA60150CW	Cream	100	—	2	17.452	**6160972**
WDK HA60150LGR	Light grey	100	—	2	17.452	**6182631**
WDK HA60150GR	Stone grey	100	—	2	17.452	**6024521**






PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.

Fittings are generally designed as cover fittings.

T and intersection cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK60150RW	Pure white	291	66	2	26.831	**6192653**
WDK HK60150CW	Cream	291	66	2	26.831	**6162274**
WDK HK60150LGR	Light grey	291	66	2	26.831	**6183050**
WDK HK60150GR	Stone grey	291	66	2	26.831	**6024769**





PVC Polyvinylchloride

T and intersection cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 (LLExport_02579) / 2019/04/25

Always indicate the item number when ordering.

Trunking height 60 mm, trunking width 150 mm, device installation

Flat angle cover





Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF60150RW	Pure white	190	—	2	19.910	**6192955**
WDK HF60150CW	Cream	190	—	2	19.910	**6161561**
WDK HF60150LGR	Light grey	190	—	2	19.910	**6183441**
WDK HF60150GR	Stone grey	190	—	2	19.910	**6024599**


PVC Polyvinylchloride

Flat angle hood for changing the direction of the WDK trunking.

Fittings are generally designed as hood/cover fittings.

End piece





Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE60150RW	Pure white	150	60	10	4.118	**6193323**
WDK HE60150CW	Cream	150	60	10	4.223	**6162878**
WDK HE60150LGR	Light grey	150	60	10	4.827	**6183840**
WDK HE60150GR	Stone grey	150	60	10	4.223	**6024823**


PVC Polyvinylchloride


End piece to close the WDK trunking.

The end pieces are pushed onto the trunking and kept in place by the spring action.

Trunking height 60 mm, trunking width 170 mm, device installation

Trunking, type WDK 60170





Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK60170RW	Pure white	2000	8	178.000	**6191258**
WDK60170CW	Cream	2000	8	178.000	**6021867**
WDK60170LGR	Light grey	2000	8	178.000	**6027164**
WDK60170GR	Stone grey	2000	8	178.000	**6022049**


PVC Polyvinylchloride

Trunking cover and base with base perforation.

Four cover clips included.

Internal corner cover





Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI60170RW	Pure white	130	—	2	12.472	**6192076**
WDK HI60170CW	Cream	130	—	2	12.472	**6160352**
WDK HI60170LGR	Light grey	130	—	2	12.472	**6182240**
WDK HI60170GR	Stone grey	130	—	2	12.472	**6022286**

PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.


Fittings are generally designed as cover fittings.

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 (LLExport_02579) / 2019/04/25

External corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA60170RW	Pure white	100	—	2	17.750	**6192378**
WDK HA60170CW	Cream	100	—	2	17.750	**6160956**
WDK HA60170LGR	Light grey	100	—	2	17.750	**6182658**
WDK HA60170GR	Stone grey	100	—	2	17.750	**6022189**






PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.

Fittings are generally designed as cover fittings.

T and intersection cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK60170RW	Pure white	291	66	2	32.600	**6192661**
WDK HK60170CW	Cream	291	66	2	32.600	**6162258**
WDK HK60170LGR	Light grey	291	66	2	32.600	**6183069**
WDK HK60170GR	Stone grey	291	66	2	32.600	**6023061**






PVC Polyvinylchloride

T and intersection cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.

Flat angle cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF60170RW	Pure white	211	—	2	22.774	**6192963**
WDK HF60170CW	Cream	211	—	2	22.774	**6161545**
WDK HF60170LGR	Light grey	211	—	2	22.774	**6183468**
WDK HF60170GR	Stone grey	211	—	2	22.774	**6022375**






PVC Polyvinylchloride

Flat angle hood for changing the direction of the WDK trunking.

Fittings are generally designed as hood/cover fittings.

End piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE60170RW	Pure white	10	4.859	**6193331**
WDK HE60170CW	Cream	10	4.859	**6162843**
WDK HE60170LGR	Light grey	10	4.859	**6183859**
WDK HE60170GR	Stone grey	10	4.859	**6022545**





PVC Polyvinylchloride


End piece to close the WDK trunking.


The end pieces are pushed onto the trunking and kept in place by the spring action.

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 (LLExport_02579) / 2019/04/25

Trunking, type WDK 60210





Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK60210RW	Pure white	2000	8	258.000	**6191266**
WDK60210CW	Cream	2000	8	258.000	**6021875**
WDK60210LGR	Light grey	2000	8	258.000	**6027172**
WDK60210GR	Stone grey	2000	8	258.000	**6022065**


PVC Polyvinylchloride

Trunking cover and base with base perforation.

Four cover fixing devices included.

Internal corner cover





Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI60210RW	Pure white	130	—	2	17.594	**6192084**
WDK HI60210CW	Cream	130	—	2	17.594	**6160360**
WDK HI60210LGR	Light grey	130	—	2	17.594	**6182259**
WDK HI60210GR	Stone grey	130	—	2	17.594	**6022294**


PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.

Fittings are generally designed as cover fittings.

External corner cover





Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA60210RW	Pure white	100	—	2	20.357	**6192386**
WDK HA60210CW	Cream	100	—	2	20.357	**6160964**
WDK HA60210LGR	Light grey	100	—	2	20.357	**6182666**
WDK HA60210GR	Stone grey	100	—	2	20.357	**6022197**


PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.

Fittings are generally designed as cover fittings.

T and intersection cover





Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK60210RW	Pure white	291	66	2	35.280	**6192688**
WDK HK60210CW	Cream	291	66	2	35.280	**6162266**
WDK HK60210LGR	Light grey	291	66	2	35.280	**6183077**
WDK HK60210GR	Stone grey	291	66	2	35.280	**6023126**

PVC Polyvinylchloride

T and intersection cover for changing the direction of the WDK trunking.


Fittings are generally designed as hood fittings.

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 (LLExport_02579) / 2019/04/25

Flat angle cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF60210RW	Pure white	250	—	2	30.182	**6192971**
WDK HF60210CW	Cream	250	—	2	38.000	**6161553**
WDK HF60210LGR	Light grey	250	—	2	38.000	**6183476**
WDK HF60210GR	Stone grey	250	—	2	38.000	**6022391**






PVC Polyvinylchloride

Flat angle hood for changing the direction of the WDK trunking.

Fittings are generally designed as hood/cover fittings.

End piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE60210RW	Pure white	10	5.475	**6193358**
WDK HE60210CW	Cream	10	5.674	**6162851**
WDK HE60210LGR	Light grey	10	5.400	**6183867**
WDK HE60210GR	Stone grey	10	5.479	**6022561**






PVC Polyvinylchloride


End piece to close the WDK trunking.

The end pieces are pushed onto the trunking and kept in place by the spring action.

Trunking, type WDK 60230

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK60230RW	Pure white	2000	8	298.000	**6191274**
WDK60230CW	Cream	2000	8	298.000	**6021891**
WDK60230LGR	Light grey	2000	8	298.000	**6027180**
WDK60230GR	Stone grey	2000	8	298.000	**6022057**
WDK60230RW 1200	Pure white	2000	46	357.600	**6191275**






PVC Polyvinylchloride

Trunking cover and base with base perforation.

Four cover fixing devices included.

Internal corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI60230RW	Pure white	130	—	2	22.509	**6192092**
WDK HI60230CW	Cream	130	—	2	22.509	**6160395**
WDK HI60230LGR	Light grey	130	—	2	22.509	**6182267**
WDK HI60230GR	Stone grey	130	—	2	22.509	**6024440**





PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.

Fittings are generally designed as cover fittings.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 (LLExport_02579) / 2019/04/25

Always indicate the item number when ordering.

Trunking height 60 mm, trunking width 230 mm

External corner cover





Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA60230RW	Pure white	100	—	2	24.645	**6192394**
WDK HA60230CW	Cream	100	—	2	24.645	**6160980**
WDK HA60230LGR	Light grey	100	—	2	24.645	**6182674**
WDK HA60230GR	Stone grey	100	—	2	24.645	**6024548**


PVC Polyvinylchloride

External corner hood for changing the direction of the WDK trunking.

Fittings are generally designed as cover fittings.

T and intersection cover





Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK60230RW	Pure white	291	66	2	39.600	**6192696**
WDK HK60230CW	Cream	291	66	2	39.600	**6162290**
WDK HK60230LGR	Light grey	291	66	2	39.600	**6183085**
WDK HK60230GR	Stone grey	291	66	2	39.600	**6024777**


PVC Polyvinylchloride

T and intersection cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.

Flat angle cover





Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF60230RW	Pure white	270	—	2	47.856	**6192998**
WDK HF60230CW	Cream	270	—	2	47.856	**6161596**
WDK HF60230LGR	Light grey	270	—	2	47.856	**6183484**
WDK HF60230GR	Stone grey	270	—	2	47.856	**6024602**


PVC Polyvinylchloride

Flat angle hood for changing the direction of the WDK trunking.

Fittings are generally designed as hood/cover fittings.

End piece





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE60230RW	Pure white	10	6.283	**6193366**
WDK HE60230CW	Cream	10	6.283	**6162886**
WDK HE60230LGR	Light grey	10	6.283	**6183875**
WDK HE60230GR	Stone grey	10	6.283	**6024831**

PVC Polyvinylchloride

End piece to close the WDK trunking.


The end pieces are pushed onto the trunking and kept in place by the spring action.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 (LLExport_02579) / 2019/04/25

Always indicate the item number when ordering.

Trunking, type WDK 80170

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK80170RW	Pure white	2000	8	214.000	**6191304**
WDK80170CW	Cream	2000	8	214.000	**6026176**
WDK80170LGR	Light grey	2000	8	214.000	**6027229**
WDK80170GR	Stone grey	2000	8	214.000	**6026184**






PVC Polyvinylchloride

Trunking cover and base with base perforation.

Internal corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI80170RW	Pure white	150	—	2	20.000	**6192106**
WDK HI80170CW	Cream	150	—	2	20.000	**6160484**
WDK HI80170LGR	Light grey	150	—	2	20.000	**6182305**
WDK HI80170GR	Stone grey	150	—	2	20.000	**6024467**






PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.

External corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA80170RW	Pure white	150	—	2	27.500	**6192416**
WDK HA80170CW	Cream	150	—	2	27.500	**6161103**
WDK HA80170LGR	Light grey	150	—	2	27.500	**6182712**
WDK HA80170GR	Stone grey	150	—	2	27.500	**6024564**






PVC Polyvinylchloride

External corner cover for changing the direction of the WDK trunking.

T and intersection cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK80170RW	Pure white	282	173	2	29.000	**6192718**
WDK HK80170CW	Cream	282	173	2	29.000	**6162401**
WDK HK80170LGR	Light grey	282	173	2	29.000	**6183123**
WDK HK80170GR	Stone grey	282	173	2	29.000	**6024793**






PVC Polyvinylchloride

T and intersection cover for changing the direction of the WDK trunking.

Flat angle cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF80170RW	Pure white	206	—	2	27.500	**6193021**
WDK HF80170CW	Cream	206	—	2	27.500	**6161707**
WDK HF80170LGR	Light grey	206	—	2	27.500	**6183522**
WDK HF80170GR	Stone grey	206	—	2	27.500	**6024610**





PVC Polyvinylchloride

Flat angle hood for changing the direction of the WDK trunking.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 (LLExport_02579) / 2019/04/25

Always indicate the item number when ordering.

Trunking height 80 mm, trunking width 170 mm

End piece





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE80170RW	Pure white	10	11.900	**6193387**
WDK HE80170CW	Cream	10	11.900	**6163009**
WDK HE80170LGR	Light grey	10	11.900	**6183913**
WDK HE80170GR	Stone grey	10	11.900	**6024858**


PVC Polyvinylchloride

End piece to close the WDK trunking.

Trunking height 80 mm, trunking width 210 mm

Trunking, type WDK 80210






Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK80210RW	Pure white	2000	8	240.000	**6191312**
WDK80210CW	Cream	2000	8	240.000	**6026206**
WDK80210LGR	Light grey	2000	8	240.000	**6027237**
WDK80210GR	Stone grey	2000	8	240.000	**6026192**

PVC Polyvinylchloride

Trunking cover and base with base perforation.
Four cover fixing devices included

Internal corner cover






Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI80210RW	Pure white	150	—	2	21.500	**6192110**
WDK HI80210CW	Cream	150	—	2	21.500	**6160492**
WDK HI80210LGR	Light grey	150	—	2	21.500	**6182313**
WDK HI80210GR	Stone grey	150	—	2	21.500	**6024475**

PVC Polyvinylchloride

Internal corner hood for changing the direction of the WDK trunking.
Fittings are generally designed as cover fittings.

External corner cover





Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA80210RW	Pure white	150	—	2	32.000	**6192420**
WDK HA80210CW	Cream	150	—	2	32.000	**6161111**
WDK HA80210LGR	Light grey	150	—	2	32.000	**6182720**
WDK HA80210GR	Stone grey	150	—	2	32.000	**6024572**

PVC Polyvinylchloride


External corner hood for changing the direction of the WDK trunking.
Fittings are generally designed as cover fittings.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 (LLExport_02579) / 2019/04/25

Always indicate the item number when ordering.

T and intersection cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK80210RW	Pure white	282	213	2	34.500	**6192722**
WDK HK80210CW	Cream	282	213	2	34.500	**6162428**
WDK HK80210LGR	Light grey	282	213	2	34.500	**6183131**
WDK HK80210GR	Stone grey	282	213	2	34.500	**6024807**






PVC Polyvinylchloride

T and intersection cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.

Flat angle cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF80210RW	Pure white	247	—	2	35.000	**6193025**
WDK HF80210CW	Cream	247	—	2	35.000	**6161715**
WDK HF80210LGR	Light grey	247	—	2	35.000	**6183530**
WDK HF80210GR	Stone grey	247	—	2	35.000	**6024629**






PVC Polyvinylchloride

Flat angle hood for changing the direction of the WDK trunking.

Fittings are generally designed as hood/cover fittings.

End piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE80210RW	Pure white	10	14.500	**6193391**
WDK HE80210CW	Cream	10	14.500	**6163017**
WDK HE80210LGR	Light grey	10	14.500	**6183921**
WDK HE80210GR	Stone grey	10	14.500	**6024874**






PVC Polyvinylchloride


End piece to close the WDK trunking.

The end pieces are pushed onto the WDK trunking in the same way as the covers.

Trunking, type WDK 100130

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK100130RW	Pure white	2000	8	214.000	**6191347**
WDK100130CW	Cream	2000	8	214.000	**6026273**
WDK100130LGR	Light grey	2000	8	214.000	**6027245**
WDK100130GR	Stone grey	2000	8	214.000	**6026281**






PVC Polyvinylchloride

Trunking cover and base with base perforation.

Internal corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI100130RW	Pure white	170	—	2	17.500	**6192114**
WDK HI100130CW	Cream	170	—	2	17.500	**6160522**
WDK HI100130LGR	Light grey	170	—	2	17.500	**6182348**
WDK HI100130GR	Stone grey	170	—	2	17.500	**6024483**





PVC Polyvinylchloride


Internal corner hood for changing the direction of the WDK trunking.


Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 (LLExport_02579) / 2019/04/25

Trunking height 100 mm, trunking width 130 mm

External corner cover






Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA100130RW	Pure white	170	—	2	27.000	**6192424**
WDK HA100130CW	Cream	170	—	2	27.000	**6161154**
WDK HA100130LGR	Light grey	170	—	2	27.000	**6182747**
WDK HA100130GR	Stone grey	170	—	2	27.000	**6024580**

PVC Polyvinylchloride

External corner cover for changing the direction of the WDK trunking.

T and intersection cover






Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK100130RW	Pure white	282	133	2	31.500	**6192726**
WDK HK100130GR	Stone grey	282	133	2	31.500	**6024815**
WDK HK100130LGR	Light grey	282	133	2	31.500	**6183166**
WDK HK100130CW	Cream	282	133	2	31.500	**6162452**

PVC Polyvinylchloride

T and intersection cover for changing the direction of the WDK trunking.

Flat angle cover







Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF100130RW	Pure white	166	—	2	22.500	**6193029**
WDK HF100130CW	Cream	166	—	2	22.500	**6161758**
WDK HF100130LGR	Light grey	166	—	2	22.500	**6183557**
WDK HF100130GR	Stone grey	166	—	2	22.500	**6024637**

PVC Polyvinylchloride

Flat angle hood for changing the direction of the WDK trunking.

End piece





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE100130RW	Pure white	10	8.200	**6193395**
WDK HE100130CW	Cream	10	8.200	**6163041**
WDK HE100130LGR	Light grey	10	8.200	**6183956**
WDK HE100130GR	Stone grey	10	8.200	**6024882**


PVC Polyvinylchloride

End piece to close the WDK trunking.

Trunking height 100 mm, trunking width 230 mm

Trunking, type WDK 100230





Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDK100230RW	Pure white	2000	4	338.000	**6191355**
WDK100230CW	Cream	2000	4	338.000	**6026338**
WDK100230LGR	Light grey	2000	4	338.000	**6027253**
WDK100230GR	Stone grey	2000	4	338.000	**6026311**
WDK100230RW 1300	Pure white	2000	28	416.000	**6191356**

PVC Polyvinylchloride

Trunking cover and base with base perforation.


Four cover fixing devices included.

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 13:35:49 (LLExport_02579) / 2019/04/25

Internal corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HI100230RW	Pure white	170	—	2	27.000	**6192118**
WDK HI100230CW	Cream	170	—	2	27.000	**6160549**
WDK HI100230LGR	Light grey	170	—	2	27.000	**6182364**
WDK HI100230GR	Stone grey	170	—	2	27.000	**6024505**






PVC Polyvinylchloride


Internal corner hood for changing the direction of the WDK trunking.

Fittings are generally designed as cover fittings.

External corner cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HA100230RW	Pure white	170	—	2	30.000	**6192428**
WDK HA100230CW	Cream	170	—	2	30.000	**6161170**
WDK HA100230LGR	Light grey	170	—	2	30.000	**6182763**
WDK HA100230GR	Stone grey	170	—	2	30.000	**6024688**






PVC Polyvinylchloride

External corner cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.

T and intersection cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HK100230RW	Pure white	282	233	2	39.000	**6192730**
WDK HK100230CW	Cream	282	233	2	39.000	**6162479**
WDK HK100230LGR	Light grey	282	233	2	39.000	**6183182**
WDK HK100230GR	Stone grey	282	233	2	39.000	**6024718**






PVC Polyvinylchloride

T and intersection cover for changing the direction of the WDK trunking.

Fittings are generally designed as hood fittings.

Flat angle cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HF100230RW	Pure white	266	—	2	48.000	**6193033**
WDK HF100230CW	Cream	266	—	2	48.000	**6161774**
WDK HF100230LGR	Light grey	266	—	2	48.000	**6183573**
WDK HF100230GR	Stone grey	266	—	2	48.000	**6024653**





PVC Polyvinylchloride

Flat angle hood for changing the direction of the WDK trunking.

Fittings are generally designed as hood/cover fittings.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 (LLExport_02579) / 2019/04/25

Always indicate the item number when ordering.

Trunking height 100 mm, trunking width 230 mm

End piece





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WDK HE100230RW	Pure white	5	10.409	**6193399**
WDK HE100230CW	Cream	5	10.237	**6163076**
WDK HE100230LGR	Light grey	5	10.237	**6183980**
WDK HE100230GR	Stone grey	5	10.237	**6024904**

PVC Polyvinylchloride


End piece to close the WDK trunking.

The end pieces are pushed onto the WDK trunking and are fixed on the floor connector by spring force.

Plastic cable routing trunking accessories

Partition for trunking height 60 mm





Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
2371 60	Light grey	2000	40	17.000	**6023118**


PVC Polyvinylchloride

Partition to divide the WDK trunking, with 60 mm trunking height for the installation of different voltage levels.

The partitions are pinned on the connectors in the base.

Partition for trunking height 80 mm





Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
2371 80	Light grey	2000	40	33.000	**6026982**


PVC Polyvinylchloride

Partition to divide the WDK trunking, with 80 mm trunking height for the installation of different voltage levels.

The partitions are pinned on the connectors in the base.

Partition for trunking height 100 mm





Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
2371 100	Light grey	2000	20	40.000	**6026990**


PVC Polyvinylchloride

Partition to divide the WDK trunking, with 100 mm trunking height for the installation of different voltage levels.

The partitions are pinned on the connectors in the base.

Device socket, type 2390





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
2390	Light grey	5	4.398	**6023207**

PVC Polyvinylchloride

Accessory mounting box for the installation of devices with support rings and support clamps in WDK cable routing trunking of 60 mm trunking height. The device socket is placed on the floor connectors and fastened in the centre with a bolt.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 (LLExport_02579) / 2019/04/25


Always indicate the item number when ordering.

Cover for single accessory mounting box, trunking height 110 mm

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
D2-1 110CW	Cream	300	10	8.000	**6169309**
D2-1 110RW	Pure white	300	10	8.000	**6194036**

PVC Polyvinylchloride

Cover section, single, for device installation in WDK trunking.






Cover for double accessory mounting box, trunking height 110 mm

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
D2-2 110CW	Cream	300	10	6.500	**6169376**
D2-2 110RW	Pure white	300	10	6.500	**6194109**

PVC Polyvinylchloride

Cover section, double, for device installation in WDK trunking.







Cover for accessory mounting box, trunking height 110 mm

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
D2-3 110RW	Pure white	300	10	5.000	**6194184**
D2-3 110CW	Cream	300	10	5.000	**6169430**

PVC Polyvinylchloride

Cover section, triple, for device installation in WDK trunking.






Device installation Modul 45

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MA45WDK	–	1	1.200	**6024070**

PA Polyamide

Adapter for the installation of accessory mounting boxes of the 71GD... series in WDK wall and ceiling trunking. The use of accessory mounting boxes, type 71GD8 and 71GD9, permit standardised installation of Modul 45 devices. Devices can be installed in the trunking heights 110, 130 and 150 mm. Combined with device covers of the AR45-... series, finished cover sections of the OT GE ... series can cover the switching and connection devices.





CEE accessory mounting box


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
2392	Light grey	5	10.500	**6024009**

PA/GF Polyamide, fibreglass reinforced

Underfloor box for mounting CEE sockets in WDK trunking. Also suitable as concealed installation box for CEE sockets.

Concealed installation box for installing CEE sockets. The underfloor box can also be used for the installation in WDK trunking of a minimum width of 150 mm. Straight version, 16 and 32 A, with 60 x 60 mm hole pattern

Supplied complete with 1 strain relief clip, 1 ED 16 insertion seal, 1 VS 16 closing bung and 4 M5 x 18 cylinder head bolts to fix the socket.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 (LLExport_02579) / 2019/04/25

CEE adapter flange 16 A






Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
2393 16	Light grey	110	96	5	2.401	**6024025**


PA Polyamide

Adapter flange for mounting CEE 16 A sockets. During the mounting of the CEE mounting box, the adapter flange is mounted behind the trunking cover for accessory mounting boxes. Suitable for 400 V CEE 16 A 5-pin 6h, art. no. 6109874.

Installed from the CEE sockets behind the cover of the accessory mounting boxes.

CEE adapter flange 32 A





Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
2393 32	Stone grey	110	96	5	4.000	**6024033**

PVC Polyvinylchloride

Intermediate flange for CEE 32 A sockets.

Installed from the CEE sockets behind the cover of the accessory mounting boxes.

Cover for duct width 40 mm



Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
2410 40GR	Stone grey	2000	64	11.300	**6022669**
2410 40CW	Cream	2000	64	11.300	**6027601**
2410 40RW	Pure white	2000	64	11.300	**6191568**

PVC Polyvinylchloride

Cover for closing the trunking.

Cover for duct width 60 mm



Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
2410 60GR	Stone grey	2000	52	15.400	**6022685**
2410 60CW	Cream	2000	52	15.400	**6027660**
2410 60LGR	Light grey	2000	52	15.400	**6028136**
2410 60RW	Pure white	2000	52	15.400	**6191592**

PVC Polyvinylchloride

Cover for closing the trunking.

Cover for duct width 90 mm



Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
2410 90GR	Stone grey	2000	16	26.500	**6022707**
2410 90CW	Cream	2000	16	26.500	**6027636**

PVC Polyvinylchloride

Cover for closing the trunking.

Cover for duct width 110 mm



Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
2410 110CW	Cream	2000	16	34.000	**6027644**

PVC Polyvinylchloride

Cover for closing the trunking.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 13:35:49 (LLExport_02579) / 2019/04/25

Cover for duct width 130 mm

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
2410 130GR	Stone grey	2000	20	42.000	**6022723**
2410 130CW	Cream	2000	20	42.000	**6027652**
2410 130RW	Pure white	2000	20	42.000	**6191657**

PVC Polyvinylchloride

Cover for closing the trunking.




Cover for duct width 150 mm

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
2410 150GR	Stone grey	2000	36	54.000	**6022731**
2410 150RW	Pure white	2000	36	54.000	**6191673**

PVC Polyvinylchloride

Cover for closing the trunking.




Cover for duct width 170 mm

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
2410 170CW	Cream	2000	52	56.700	**6027679**

PVC Polyvinylchloride

Cover for closing the trunking.



Cover for duct width 210 mm

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
2410 210GR	Stone grey	2000	28	72.200	**6022774**
2410 210CW	Cream	2000	28	72.200	**6027687**
2410 210RW	Pure white	2000	28	72.200	**6191738**

PVC Polyvinylchloride

Cover for closing the trunking.




Cover for duct width 230 mm

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
2410 230CW	Cream	2000	28	78.500	**6027504**

PVC Polyvinylchloride

Cover for closing the trunking.




Cover clip for 60 mm trunking width

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
2370 60	Light grey	48.8	24.8	20	0.500	**6022995**

PVC Polyvinylchloride

Cover clip for better and easier laying of lines in the WDK trunking.







Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 (LLExport_02579) / 2019/04/25

Cover clip for 90 mm trunking width







Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
2370 90	Light grey	75.7	28.8	20	1.100	**6023509**

PVC Polyvinylchloride

Cover clip for better and easier laying of lines in the WDK trunking.

Cover clip for 110 mm trunking width







Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
2370 110	Light grey	95.7	28.8	20	1.400	**6023517**

PVC Polyvinylchloride

Cover clip for better and easier laying of lines in the WDK trunking.

Cover clip for 130 mm trunking width






Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
2370 130	Light grey	116.2	36	20	2.500	**6023525**

PVC Polyvinylchloride

Cover clip for better and easier laying of lines in the WDK trunking.

Cover clip for 150 mm trunking width






Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
2370 150	Light grey	136.2	36	20	3.000	**6023533**

PVC Polyvinylchloride

Cover clip for better and easier laying of lines in the WDK trunking.

Cover clip for 170 mm trunking width






Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
2370 170	Light grey	156.7	36	20	3.300	**6023541**

PVC Polyvinylchloride

Cover clip for better and easier laying of lines in the WDK trunking.

Cover clip for 210 mm trunking width





Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
2370 210	Light grey	197.2	36	20	3.900	**6023576**

PVC Polyvinylchloride

Cover clip for better and easier laying of lines in the WDK trunking.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 (LLExport_02579) / 2019/04/25


Always indicate the item number when ordering.

Cover clip for 230 mm trunking width

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
2370 230	Light grey	216.2	36	20	4.800	**6023584**

PVC Polyvinylchloride

Cover clip for better and easier laying of lines in the WDK trunking.





Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/25 13:35:49 (LLExport_02579) / 2019/04/25

Always indicate the item number when ordering.




Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten_en / 2019/04/18 11:21:04 - 11:21:04 (LLExport_02579) / 2019/04/18

Trunking, type WDK-H 10020 with base perforation

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDKH-10020RW	Pure white	2000	96	8.500	**6175375**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Trunking cover and base with base perforation made of halogen-free plastic.






Trunking, type WDK-H 15030 with base perforation

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDKH-15030RW	Pure white	2000	48	15.000	**6175390**
WDKH-15030LGR	Light grey	2000	48	15.000	**6175457**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Trunking cover and base with base perforation made of halogen-free plastic.







Internal corner cover

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-I15030RW	Pure white	38.5	4	0.677	**6175578**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Internal corner cover for changing the direction of the halogen-free WDKH trunking.






External corner cover

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-A15030RW	Pure white	38.5	4	0.948	**6175618**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

External corner cover for changing the direction of the halogen-free WDKH trunking.






Flat angle cover

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-F15030RW	Pure white	53	4	0.833	**6175654**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Flat angle hood for changing the direction of the halogen-free WDKH trunking.






T-piece cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-T15030RW	Pure white	73	53	4	0.800	**6175690**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

T and intersection cover for changing the direction of the halogen-free WDK-H trunking.






Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Trunking height 15 mm, trunking height 30 mm, halogen-free

End piece





Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-E15030RW	Pure white	30	17	10	0.200	**6175546**


PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

End piece for closing the WDK-H trunking.

Trunking height 20 mm, trunking width 20 mm, halogen-free

Trunking, type WDKH-20020






Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDKH-20020RW	Pure white	2000	48	8.800	**6175400**
WDKH-20020LGR	Light grey	2000	48	8.800	**6175460**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Trunking cover and base with base perforation made of halogen-free plastic.

Internal corner cover






Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-I20020RW	Pure white	38.5	4	0.540	**6175581**
WDKH-I20020LGR	Light grey	38.5	4	0.450	**6175964**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Internal corner cover for changing the direction of the halogen-free WDKH trunking.

External corner cover






Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-A20020RW	Pure white	38.5	4	0.578	**6175624**
WDKH-A20020LGR	Light grey	38.5	4	0.520	**6176000**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

External corner cover for changing the direction of the halogen-free WDKH trunking.

Flat angle cover





Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-F20020RW	Pure white	38	4	0.502	**6175658**
WDKH-F20020LGR	Light grey	38	4	0.502	**6176036**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Flat angle hood for changing the direction of the halogen-free WDKH trunking.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.

T-piece cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-T20020RW	Pure white	57	53.5	4	0.520	**6175694**
WDKH-T20020LGR	Light grey	57	53.5	4	0.520	**6176072**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

T and intersection cover for changing the direction of the halogen-free WDK-H trunking.






End piece

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-E20020RW	Pure white	19	18	10	0.087	**6175550**
WDKH-E20020LGR	Light grey	19	18	10	0.089	**6175928**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

End piece for closing the WDK-H trunking.






Trunking, type WDKH-30045

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDKH-30045RW	Pure white	2000	48	24.900	**6175405**
WDKH-30045LGR	Light grey	2000	48	24.900	**6175463**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Trunking cover and base with base perforation made of halogen-free plastic.







Internal corner cover

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-I30045RW	Pure white	60	4	1.144	**6175590**
WDKH-I30045LGR	Light grey	60	4	1.144	**6175968**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Internal corner cover for changing the direction of the halogen-free WDKH trunking.






External corner hood

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-A30045RW	Pure white	57	4	2.000	**6175626**
WDKH-A30045LGR	Light grey	57	4	2.000	**6176004**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

External corner cover for changing the direction of the halogen-free WDKH trunking.






Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Trunking height 30 mm, trunking width 45 mm, halogen-free

Flat angle cover






Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-F30045RW	Pure white	60	4	1.652	**6175662**
WDKH-F30045LGR	Light grey	60	4	1.652	**6176040**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Flat angle hood for changing the direction of the halogen-free WDKH trunking.

T-piece cover






Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-T30045RW	Pure white	130	4	2.400	**6175698**
WDKH-T30045LGR	Light grey	130	4	2.400	**6176076**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

T and intersection cover for changing the direction of the halogen-free WDK-H trunking.

End piece





Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-E30045RW	Pure white	45	30	10	0.435	**6175554**
WDKH-E30045LGR	Light grey	45	30	10	0.500	**6175932**


PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

End piece for closing the WDK-H trunking.

Trunking height 40 mm, trunking width 60 mm, halogen-free

Trunking, type WDKH 40060






Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDKH-40060RW	Pure white	2000	24	44.000	**6175410**
WDKH-40060LGR	Light grey	2000	24	44.000	**6175466**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Trunking cover and base with base perforation made of halogen-free plastic including cover fixing devices.

Internal corner cover





Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-I40060RW	Pure white	85	2	6.427	**6175594**
WDKH-I40060LGR	Light grey	85	2	6.427	**6175972**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene


Internal corner cover for changing the direction of the halogen-free WDKH trunking.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

External corner cover

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-A40060RW	Pure white	45	2	7.423	**6175630**
WDKH-A40060LGR	Light grey	45	2	7.423	**6176008**






PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

External corner cover for changing the direction of the halogen-free WDKH trunking.

Flat angle cover

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-F40060RW	Pure white	85	2	7.048	**6175666**
WDKH-F40060LGR	Light grey	85	2	7.048	**6176044**






PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Flat angle hood for changing the direction of the halogen-free WDKH trunking.

T and intersection cover

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-T40060RW	Pure white	170	2	7.600	**6175702**
WDKH-T40060LGR	Light grey	170	2	7.600	**6176080**






PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

T and intersection cover for changing the direction of the halogen-free WDK-H trunking.

End piece

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-E40060RW	Pure white	40	60	10	0.992	**6175558**
WDKH-E40060LGR	Light grey	40	60	10	0.992	**6175936**






PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

End piece for closing the WDK-H trunking.

Trunking, type WDKH-60090

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDKH-60090RW	Pure white	2000	24	81.500	**6175415**
WDKH-60090LGR	Light grey	2000	24	81.500	**6175469**





PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene


Trunking cover and base with base perforation made of halogen-free plastic including cover fixing devices.


Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Trunking height 60 mm, trunking width 90 mm, halogen-free

Internal corner cover






Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-I60090RW	Pure white	130	2	10.700	**6175598**
WDKH-I60090LGR	Light grey	130	2	10.700	**6175976**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Internal corner cover for changing the direction of the halogen-free WDKH trunking.

External corner cover






Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-A60090RW	Pure white	69	2	10.700	**6175634**
WDKH-A60090LGR	Light grey	69	2	10.700	**6176012**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

External corner cover for changing the direction of the halogen-free WDKH trunking.

Flat angle cover






Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-F60090RW	Pure white	129	2	9.696	**6175670**
WDKH-F60090LGR	Light grey	129	2	9.696	**6176048**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Flat angle hood for changing the direction of the halogen-free WDKH trunking.

End piece






Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-E60090RW	Pure white	90	60	10	2.024	**6175562**
WDKH-E60090LGR	Light grey	90	60	10	2.024	**6175940**


PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

End piece for closing the WDK-H trunking.

Trunking height 60 mm, trunking width 110 mm, halogen-free

Trunking, type WDKH-60110





Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDKH-60110RW	Pure white	2000	16	95.900	**6175420**
WDKH-60110LGR	Light grey	2000	16	95.900	**6175472**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Trunking cover and base with base perforation made of halogen-free plastic including cover fixing devices.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.


Internal corner cover

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-I60110RW	Pure white	130	2	11.315	**6175602**
WDKH-I60110LGR	Light grey	130	2	11.315	**6175980**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Internal corner cover for changing the direction of the halogen-free WDKH trunking.






External corner cover

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-A60110RW	Pure white	100	2	11.437	**6175638**
WDKH-A60110LGR	Light grey	100	2	11.338	**6176016**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

External corner cover for changing the direction of the halogen-free WDKH trunking.






Flat angle cover

Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-F60110RW	Pure white	149	2	12.984	**6175674**
WDKH-F60110LGR	Light grey	149	2	13.022	**6176052**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Flat angle hood for changing the direction of the halogen-free WDKH trunking.






T and intersection cover

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-T60110RW	Pure white	272	65	2	21.000	**6175710**
WDKH-T60110LGR	Light grey	272	65	2	21.000	**6176088**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

T and intersection cover for changing the direction of the halogen-free WDK-H trunking.






End piece

Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-E60110RW	Pure white	110	60	10	2.556	**6175566**
WDKH-E60110LGR	Light grey	110	60	10	2.528	**6175944**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

End piece for closing the WDK-H trunking.







Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Trunking, type WDKH-60150






Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
WDKH-60150RW	Pure white	2000	8	146.650	**6175425**
WDKH-60150LGR	Light grey	2000	8	146.650	**6175475**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Trunking cover and base with base perforation made of halogen-free plastic including cover fixing devices.

Internal corner cover






Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-I60150RW	Pure white	130	2	12.521	**6175606**
WDKH-I60150LGR	Light grey	130	2	12.521	**6175984**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Internal corner cover for changing the direction of the halogen-free WDKH trunking.

External corner cover






Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-A60150RW	Pure white	100	2	15.180	**6175642**
WDKH-A60150LGR	Light grey	100	2	15.180	**6176020**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

External corner cover for changing the direction of the halogen-free WDKH trunking.

Flat angle cover






Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-F60150RW	Pure white	190	2	18.643	**6175678**
WDKH-F60150LGR	Light grey	190	2	18.643	**6176056**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Flat angle hood for changing the direction of the halogen-free WDKH trunking.

T and intersection cover






Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-T60150RW	Pure white	291	2	21.800	**6175714**
WDKH-T60150LGR	Light grey	291	2	21.800	**6176092**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

T and intersection cover for changing the direction of the halogen-free WDK-H trunking.

End piece





Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
WDKH-E60150RW	Pure white	150	60	10	3.613	**6175570**
WDKH-E60150LGR	Light grey	150	60	10	3.736	**6175948**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

End piece for closing the WDK-H trunking.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.

Cover clip, halogen-free 60

Type	Colour	Cover width mm	Pack. pcs	Weight kg/100 pcs.	Item No.
OTK H60	Pure white	60	10	0.400	**6176122**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Cover clip for better and easier laying of lines in the WDK trunking.







Cover clip, halogen-free 90

Type	Colour	Cover width mm	Pack. pcs	Weight kg/100 pcs.	Item No.
OTK H90	Pure white	90	10	0.900	**6176125**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Cover clip for better and easier laying of lines in the WDK trunking.







Cover clip, halogen-free 110

Type	Colour	Cover width mm	Pack. pcs	Weight kg/100 pcs.	Item No.
OTK H110	Pure white	110	10	1.200	**6176128**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Cover clip for better and easier laying of lines in the WDK trunking.






Cover clip, halogen-free 150

Type	Colour	Cover width mm	Pack. pcs	Weight kg/100 pcs.	Item No.
OTK H150	Pure white	150	10	2.500	**6176131**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Cover clip for better and easier laying of lines in the WDK trunking.






Partition, halogen-free 40

Type	Colour	Dimension a mm	Pack. m	Weight kg/100 m	Item No.
WDKH-TW40LGR	Light grey	2000	60	13.350	**6175500**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Partition to divide the WDKH trunking of 40 mm trunking height for the installation of different voltage levels.






Partition, halogen-free 60

Type	Colour	Dimension a mm	Pack. m	Weight kg/100 m	Item No.
WDKH-TW60LGR	Light grey	2000	40	20.650	**6175504**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Partition to divide the WDKH trunking of 60 mm trunking height for the installation of different voltage levels.






Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18



Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

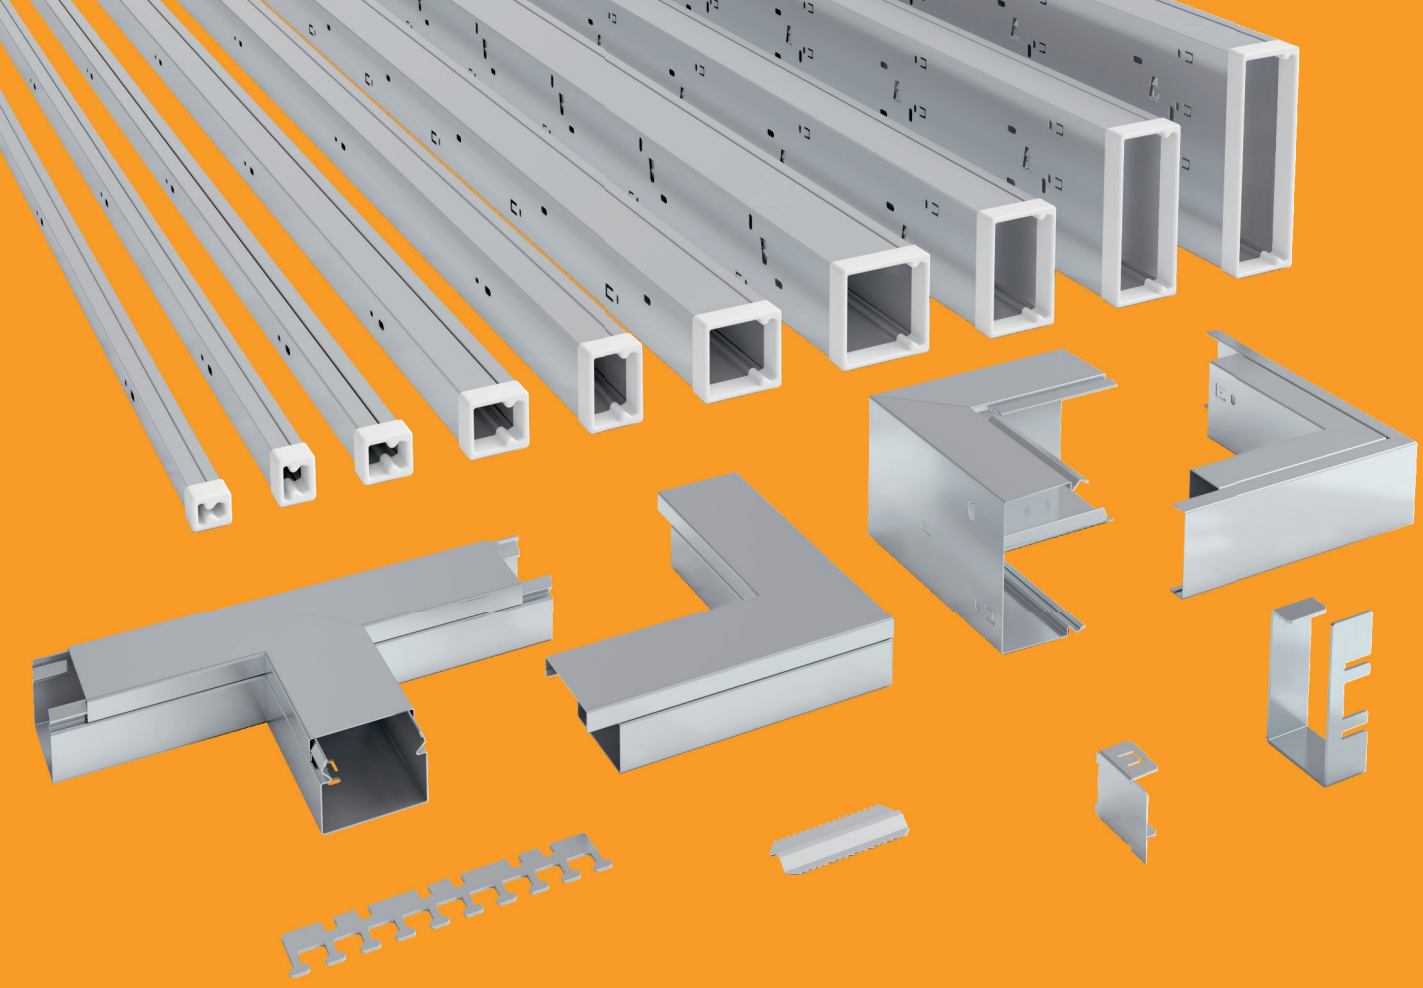

Reliable protection for cables

LKM metal cable trunking systems

A wide range of practical mounting details make the LKM cable trunking a reliable partner during cable routing.



Partition



Trunking clamp



Secure equipotential bonding



Cable brackets



Edge protection


Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Trunking height 24 mm, trunking width 30 mm

Trunking, type LKM 20030





Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
LKM20030FS	—	2000	24	58.000	**6246974**

St Steel


FS Strip-galvanised

Trunking cover and base with base perforation.
Equipotential bonding is guaranteed between the cover and the base without any additional aids.

Trunking height 60 mm, trunking width 100 mm

Trunking, type LKM 60100





Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
LKM60100FS	—	2000	8	221.700	**6247113**

St Steel

FS Strip-galvanised

Trunking cover and base with base perforation.
Equipotential bonding is guaranteed between the cover and the base without any additional aids.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.



Always indicate the item number when ordering.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LExport_02579) / 2019/04/18

Floor trunking, type 2650

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
2650	Stone grey	2000	36	43.000	**6020801**

PVC Polyvinylchloride

Trunking cover and base with base perforation.







Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.



Always indicate the item number when ordering.

Precise measurements, tested quality

Wiring trunking by OBO Bettermann





OBO wiring trunking stand out through a wide range of benefits:


- Stable trunking with high-quality thicknesses
- Exact predetermined breaking points in the strut and base area
- Soft, burr-free slot, rounded tabs
- Cut edges rounded and deburred in the closing area
- Firm positioning of the covers through optimum closing contours
- Wire retaining lug, allows wiring without wire retaining bracket

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Wiring trunking, type LK4 15015







Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 15015	Stone grey	2000	15x15	72	12.000	**6178001**

PVC Polyvinylchloride

Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.

Wiring trunking, type LK4 30015







Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 30015	Stone grey	2000	15x30	40	18.000	**6178003**

PVC Polyvinylchloride

Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.

Wiring trunking, type LK4 30025







Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 30025	Stone grey	2000	25x30	48	28.000	**6178005**

PVC Polyvinylchloride

Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.

Cover






Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 25	Stone grey	31	2000	32	10.000	**6178482**

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LK4 40025






Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 40025	Stone grey	2000	25x40	48	36.500	**6178010**

PVC Polyvinylchloride

Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.

Cover





Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 25	Stone grey	31	2000	32	10.000	**6178482**

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.

Wiring trunking, type LK4 40040

Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 40040	Stone grey	2000	40x40	36	44.000	**6178012**

PVC Polyvinylchloride

Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.







Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 40	Stone grey	46.2	2000	24	13.500	**6178484**

PVC Polyvinylchloride

Trunking cover for replacement requirements.






Wiring trunking, type LK4 40060

Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 40060	Stone grey	2000	60x40	24	57.000	**6178014**

PVC Polyvinylchloride

Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.







Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 60	Stone grey	66.4	2000	40	18.000	**6178486**

PVC Polyvinylchloride

Trunking cover for replacement requirements.






Wiring trunking, type LK4 40080

Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 40080	Stone grey	2000	80x40	24	71.000	**6178016**

PVC Polyvinylchloride

Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.







Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 80	Stone grey	87	2000	12	27.000	**6178488**

PVC Polyvinylchloride

Trunking cover for replacement requirements.







Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Wiring trunking, type LK4 40100







Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 40100	Stone grey	2000	100x40	24	85.500	**6178018**

PVC Polyvinylchloride

Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.

Cover






Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 100	Stone grey	107.4	2000	12	35.500	**6178490**

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LK4 60015






Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 60015	Stone grey	2000	15x60	48	32.500	**6178026**

PVC Polyvinylchloride

Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.

Wiring trunking, type LK4 60025






Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 60025	Stone grey	2000	25x60	32	46.000	**6178028**

PVC Polyvinylchloride

Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.

Cover







Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 25	Stone grey	31	2000	32	10.000	**6178482**

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LK4 60040





Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 60040	Stone grey	2000	40x60	24	53.500	**6178031**

PVC Polyvinylchloride


Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 40	Stone grey	46.2	2000	24	13.500	**6178484**






PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LK4 60060

Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 60060	Stone grey	2000	60x60	32	64.500	**6178033**







PVC Polyvinylchloride

Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.

Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 60	Stone grey	66.4	2000	40	18.000	**6178486**






PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LK4 60080

Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 60080	Stone grey	2000	80x60	24	82.500	**6178035**







PVC Polyvinylchloride

Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.

Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 80	Stone grey	87	2000	12	27.000	**6178488**






PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LK4 60100

Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 60100	Stone grey	2000	100x60	16	100.000	**6178037**






PVC Polyvinylchloride


Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Cover







Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 100	Stone grey	107.4	2000	12	35.500	**6178490**

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LK4 60120







Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 60120	Stone grey	2000	120x60	8	117.000	**6178039**

PVC Polyvinylchloride

Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.

Cover






Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 120	Stone grey	127.8	2000	16	45.500	**6178492**

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LK4 80025







Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 80025	Stone grey	2000	25x80	32	61.000	**6178050**

PVC Polyvinylchloride

Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.

Cover






Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 25	Stone grey	31	2000	32	10.000	**6178482**

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LK4 80040





Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 80040	Stone grey	2000	40x80	24	64.500	**6178052**

PVC Polyvinylchloride


Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 40	Stone grey	46.2	2000	24	13.500	**6178484**






PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LK4 80060

Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 80060	Stone grey	2000	60x80	24	76.000	**6178054**







PVC Polyvinylchloride

Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.

Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 60	Stone grey	66.4	2000	40	18.000	**6178486**






PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LK4 80080

Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 80080	Stone grey	2000	80x80	16	95.500	**6178056**







PVC Polyvinylchloride

Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.

Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 80	Stone grey	87	2000	12	27.000	**6178488**







PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LK4 80100

Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 80100	Stone grey	2000	100x80	16	111.500	**6178059**





PVC Polyvinylchloride


Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.


Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

LK4 wiring trunking

Cover







Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 100	Stone grey	107.4	2000	12	35.500	**6178490**

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LK4 80120







Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 80120	Stone grey	2000	120x80	8	128.500	**6178061**

PVC Polyvinylchloride

Wiring trunking including cover and base perforation. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.

Cover





Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 120	Stone grey	127.8	2000	16	45.500	**6178492**


PVC Polyvinylchloride

Trunking cover for replacement requirements.

LK4/N wiring trunking

Wiring trunking, type LK4/N 60025






Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 N 60025	Stone grey	2000	25x60	32	48.500	**6178203**

PVC Polyvinylchloride

Wiring trunking including cover and base perforation, tapering in the side slots stops the cables from falling out. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.

Cover






Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 25	Stone grey	31	2000	32	10.000	**6178482**

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LK4/N 60040





Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 N 60040	Stone grey	2000	40x60	24	56.000	**6178205**

PVC Polyvinylchloride


Wiring trunking including cover and base perforation, tapering in the side slots stops the cables from falling out. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 40	Stone grey	46.2	2000	24	13.500	**6178484**






PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LK4/N 60060

Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 N 60060	Stone grey	2000	60x60	32	68.000	**6178207**






PVC Polyvinylchloride

Wiring trunking including cover and base perforation, tapering in the side slots stops the cables from falling out. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.

Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 60	Stone grey	66.4	2000	40	18.000	**6178486**






PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LK4/N 60080

Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 N 60080	Stone grey	2000	80x60	24	87.000	**6178209**







PVC Polyvinylchloride

Wiring trunking including cover and base perforation, tapering in the side slots stops the cables from falling out. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.

Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 80	Stone grey	87	2000	12	27.000	**6178488**







PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LK4/N 60100

Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 N 60100	Stone grey	2000	100x60	16	105.500	**6178211**






PVC Polyvinylchloride


Wiring trunking including cover and base perforation, tapering in the side slots stops the cables from falling out. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Cover






Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 100	Stone grey	107.4	2000	12	35.500	**6178490**

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LK4/N 60120







Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 N 60120	Stone grey	2000	120x60	8	120.500	**6178213**

PVC Polyvinylchloride

Wiring trunking including cover and base perforation, tapering in the side slots stops the cables from falling out. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.

Cover






Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 120	Stone grey	127.8	2000	16	45.500	**6178492**

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LK4/N 80025







Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 N 80025	Stone grey	2000	25x80	32	65.000	**6178225**

PVC Polyvinylchloride

Wiring trunking including cover and base perforation, tapering in the side slots stops the cables from falling out. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.

Cover






Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 25	Stone grey	31	2000	32	10.000	**6178482**

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LK4/N 80040





Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 N 80040	Stone grey	2000	40x80	24	73.500	**6178227**

PVC Polyvinylchloride


Wiring trunking including cover and base perforation, tapering in the side slots stops the cables from falling out. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 40	Stone grey	46.2	2000	24	13.500	**6178484**






PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LK4/N 80060

Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 N 80060	Stone grey	2000	60x80	24	82.000	**6178229**






PVC Polyvinylchloride

Wiring trunking including cover and base perforation, tapering in the side slots stops the cables from falling out. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.

Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 60	Stone grey	66.4	2000	40	18.000	**6178486**






PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LK4/N 80080

Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 N 80080	Stone grey	2000	80x80	16	101.000	**6178231**







PVC Polyvinylchloride

Wiring trunking including cover and base perforation, tapering in the side slots stops the cables from falling out. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.

Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 80	Stone grey	87	2000	12	27.000	**6178488**






PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LK4/N 80100

Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 N 80100	Stone grey	2000	100x80	16	116.500	**6178233**





PVC Polyvinylchloride


Wiring trunking including cover and base perforation, tapering in the side slots stops the cables from falling out. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

LK4/N wiring trunking

Cover







Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 100	Stone grey	107.4	2000	12	35.500	**6178490**

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LK4/N 80120







Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LK4 N 80120	Stone grey	2000	120x80	8	133.500	**6178236**

PVC Polyvinylchloride

Wiring trunking including cover and base perforation, tapering in the side slots stops the cables from falling out. The nominal dimension of the system size corresponds to the internal dimension of the trunking. Special lengths on request.

Cover





Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LK4 D 120	Stone grey	127.8	2000	16	45.500	**6178492**


PVC Polyvinylchloride

Trunking cover for replacement requirements.

LKV DIN wiring trunking

Wiring trunking, type LKV 25025







Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LKV 25025	Stone grey	2000	25x25	32	24.000	**6178302**

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation. Special lengths on request.

Cover






Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 25	Stone grey	25	2000	36	9.500	**6178504**

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LKV 37025





Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LKV 37025	Stone grey	2000	25x37,5	32	31.500	**6178305**

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation. Special lengths on request.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.


Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 25	Stone grey	25	2000	36	9.500	**6178504**

PVC Polyvinylchloride

Trunking cover for replacement requirements.






Wiring trunking, type LKV 37037

Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LKV 37037	Stone grey	2000	37,5 x 37,5	60	40.500	**6178307**

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation. Special lengths on request.






Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 37	Stone grey	37.5	2000	24	15.000	**6178506**

PVC Polyvinylchloride

Trunking cover for replacement requirements.






Wiring trunking, type LKV 50025

Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LKV 50025	Stone grey	2000	25x50	60	35.500	**6178310**

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation. Special lengths on request.







Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 25	Stone grey	25	2000	36	9.500	**6178504**

PVC Polyvinylchloride

Trunking cover for replacement requirements.






Wiring trunking, type LKV 50037

Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LKV 50037	Stone grey	2000	37,5 x 50	48	44.500	**6178312**

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation. Special lengths on request.






Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Cover






Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 37	Stone grey	37.5	2000	24	15.000	**6178506**

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LKV 50050







Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LKV 50050	Stone grey	2000	50x50	36	50.000	**6178314**

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation. Special lengths on request.

Cover






Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 50	Stone grey	50	2000	24	17.500	**6178508**

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LKV 75075






Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LKV 50075	Stone grey	2000	75x50	24	66.000	**6178316**

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation. Special lengths on request.

Cover






Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 75	Stone grey	75	2000	12	23.000	**6178510**

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LKV 75025





Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LKV 75025	Stone grey	2000	25x75	40	48.500	**6178320**

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation. Special lengths on request.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.


Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 25	Stone grey	25	2000	36	9.500	**6178504**

PVC Polyvinylchloride

Trunking cover for replacement requirements.






Wiring trunking, type LKV 75037

Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LKV 75037	Stone grey	2000	37,5 x 75	32	58.500	**6178322**

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation. Special lengths on request.






Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 37	Stone grey	37.5	2000	24	15.000	**6178506**

PVC Polyvinylchloride

Trunking cover for replacement requirements.






Wiring trunking, type LKV 75050

Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LKV 75050	Stone grey	2000	50x75	24	67.500	**6178324**

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation. Special lengths on request.







Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 50	Stone grey	50	2000	24	17.500	**6178508**

PVC Polyvinylchloride

Trunking cover for replacement requirements.






Wiring trunking, type LKV 75075

Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LKV 75075	Stone grey	2000	75x75	16	80.000	**6178326**

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation. Special lengths on request.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Cover






Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 75	Stone grey	75	2000	12	23.000	**6178510**

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LKV 75100






Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LKV 75100	Stone grey	2000	100x75	16	105.500	**6178328**

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation. Special lengths on request.

Cover






Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 100	Stone grey	100	2000	12	34.500	**6178512**

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LKV 75125







Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LKV 75125	Stone grey	2000	125 x 75	8	128.500	**6178330**

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation. Special lengths on request.

Cover






Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 125	Stone grey	125	2000	16	47.000	**6178514**

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Cover





Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 37	Stone grey	37.5	2000	24	15.000	**6178506**

PVC Polyvinylchloride


Trunking cover for replacement requirements.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 50	Stone grey	50	2000	24	17.500	**6178508**






PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LKV 10075

Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LKV 10075	Stone grey	2000	75x100	16	96.000	**6178338**






PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation. Special lengths on request.

Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 75	Stone grey	75	2000	12	23.000	**6178510**






PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring duct, type LKV 100100

Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LKV 100100	Stone grey	2000	100x100	8	116.500	**6178341**






PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation. Special lengths on request.

Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 100	Stone grey	100	2000	12	34.500	**6178512**







PVC Polyvinylchloride

Trunking cover for replacement requirements.

Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 25	Stone grey	25	2000	36	9.500	**6178504**





PVC Polyvinylchloride


Trunking cover for replacement requirements.

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Cover






Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 37	Stone grey	37.5	2000	24	15.000	**6178506**

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LKV N 75050







Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LKV N 75050	Stone grey	2000	50x75	24	72.500	**6178424**

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation, tapering in the side slots stops the cables from falling out.

Cover






Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 50	Stone grey	50	2000	24	17.500	**6178508**

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LKV N 75075






Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LKV N 75075	Stone grey	2000	75x75	16	84.500	**6178426**

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation, tapering in the side slots stops the cables from falling out.

Cover






Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 75	Stone grey	75	2000	12	23.000	**6178510**

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LKV N 75100





Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LKV N 75100	Stone grey	2000	100x75	16	112.000	**6178428**

PVC Polyvinylchloride


Wiring trunking to DIN EN 50085-2-3 including cover and base perforation, tapering in the side slots stops the cables from falling out.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 100	Stone grey	100	2000	12	34.500	**6178512**






PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LKV N 75125

Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LKV N 75125	Stone grey	2000	125x75	8	138.500	**6178430**







PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation, tapering in the side slots stops the cables from falling out.

Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 125	Stone grey	125	2000	16	47.000	**6178514**






PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LKV N 10037

Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LKV N 10037	Stone grey	2000	37,5x100	32	73.000	**6178435**






PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation, tapering in the side slots stops the cables from falling out.

Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 37	Stone grey	37.5	2000	24	15.000	**6178506**






PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LKV N 10050

Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LKV N 10050	Stone grey	2000	50x100	24	83.000	**6178437**






PVC Polyvinylchloride


Wiring trunking to DIN EN 50085-2-3 including cover and base perforation, tapering in the side slots stops the cables from falling out.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Cover






Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 50	Stone grey	50	2000	24	17.500	**6178508**

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring trunking, type LKV N 10075






Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LKV N 10075	Stone grey	2000	75x100	16	102.000	**6178439**

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation, tapering in the side slots stops the cables from falling out.

Cover






Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 75	Stone grey	75	2000	12	23.000	**6178510**

PVC Polyvinylchloride

Trunking cover for replacement requirements.

Wiring duct, type LKV N 100100






Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LKV N 100100	Stone grey	2000	100x100	8	122.500	**6178441**

PVC Polyvinylchloride

Wiring trunking to DIN EN 50085-2-3 including cover and base perforation, tapering in the side slots stops the cables from falling out.

Cover






Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKV D 100	Stone grey	100	2000	12	34.500	**6178512**


PVC Polyvinylchloride

Trunking cover for replacement requirements.

Accessories, VK wiring trunking

Wire retainer for type LK4 and LK4/N





Type	Colour	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LK4 H	Stone grey	56	25	100	0.348	**6178092**

PS Polystyrene

Wire retainer for wiring trunking, type LK4 and LK4/N. The wire retainer prevents already inserted cables from falling out. These predetermined breaking points allow the length to be reduced for various trunking widths to 38, 28 and 23 mm.

Always indicate the item number when ordering.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Plastic rivet tool

Type	Colour	Dimension	Pack. pcs	Weight kg/100 pcs.	Item No.
KNW1	Black	Ø 4,5mm	1	9.300	**6178527**

POM Polyacetal (polyoxymethylene, polyformaldehyde)

Riveting tool for installing body-bound rivets 4.5 mm.






Plastic rivet tool

Type	Colour	Dimension	Pack. pcs	Weight kg/100 pcs.	Item No.
KNW2	Black	Ø 6mm	1	9.400	**6178529**

POM Polyacetal (polyoxymethylene, polyformaldehyde)

Riveting tool for mounting spreading rivets 6 mm.






Spreading rivet, KSN 1

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
KSN1	Light grey	100	0.026	**6178520**

PP Polypropylene

The riveting tool KNW1 should be used for rapid mounting and for the optimum function.






Body-bound rivet, KSN 22

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
KSN22	Light grey	100	0.070	**6178525**

PA Polyamide

The riveting tool KNW2 should be used for rapid mounting and for the optimum function. Dimension of the drill hole: 6.5 mm.





Spreading rivet, 2252 6.5

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
2252 6.5	Stone grey	100	0.300	**6022928**

PA Polyamide

Spreading rivets to fix the trunking on the base plates.



Release pliers

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
AKZ	1	20.000	**6178535**

St Steel

To notch the bars down to the trunking base.




Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Spacer







Type	Colour	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
AH1	Grey	12	100	0.354	**6178540**
AH2	Grey	20	100	0.577	**6178542**

PVC Polyvinylchloride

Stackable spacer for height compensation between the different component heights.

Support rail





Type	Version	Material thickness mm	Length mm	Bundle m	Weight kg/100 m	Item No.
2064 GTP 2M	Unperforated	1.5	2000	20	70.000	**1115057**


St Steel

GTP Electrogalvanised, transparently passivated

G rail G32 to DIN EN 60715 (previously DIN EN 50035).

Support rail perforated






Type	Version	Material thickness mm	Length mm	Bundle m	Weight kg/100 m	Item No.
2064 GTPL 2M	Perforated	1.5	2000	20	69.000	**1115065**


St Steel

GTP Electrogalvanised, transparently passivated

G rail G32 to DIN EN 60715 (previously DIN EN 50035).

Hat profile rail, unperforated





Type	Version	Material thickness mm	Length mm	Bundle m	Weight kg/100 m	Item No.
2069 2M GTP	Unperforated	1	2000	50	36.040	**1115650**


St Steel

GTP Electrogalvanised, transparently passivated

Hat profile rail 35 x 7.5 mm to DIN EN 60715 (formerly DIN EN 50022).

Hat profile rail, perforated





Type	Version	Material thickness mm	Length mm	Bundle m	Weight kg/100 m	Item No.
2069 2M GTPL	Perforated	1	2000	50	33.280	**1115669**

St Steel

GTP Electrogalvanised, transparently passivated

Hat profile rail 35 x 7.5 mm to DIN EN 60715 (formerly DIN EN 50022).

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.



Always indicate the item number when ordering.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Weitseiten_en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Wiring trunking, type LKV H 50037

Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LKVH 50037	Light grey	2000	37,5 x 50	48	32.000	**6178582**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Halogen-free wiring trunking including cover and base perforation to DIN EN 50085-2-3.






Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKVH D 37	Light grey	37.5	2000	24	8.500	**6178670**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Trunking cover for replacement requirements.






Wiring trunking, type LKV H 50050

Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LKVH 50050	Light grey	2000	50x50	36	37.000	**6178585**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Halogen-free wiring trunking including cover and base perforation to DIN EN 50085-2-3.






Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKVH D 50	Light grey	50	2000	24	11.000	**6178674**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Trunking cover for replacement requirements.






Wiring trunking, type LKV H 50075

Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LKVH 50075	Light grey	2000	75x50	24	52.000	**6178588**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Halogen-free wiring trunking including cover and base perforation to DIN EN 50085-2-3.






Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKVH D 75	Light grey	75	2000	12	18.000	**6178678**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Trunking cover for replacement requirements.






Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Wiring trunking, type LKV H 75037






Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LKVH N 75037	Light grey	2000	37,5 x 75	32	44.000	**6178552**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Halogen-free wiring trunking including cover and base perforation to DIN EN 50085-2-3.

Cover






Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKVH D 37	Light grey	37.5	2000	24	8.500	**6178670**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Trunking cover for replacement requirements.

Wiring trunking, type LKV H 75050






Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LKVH N 75050	Light grey	2000	50x75	24	51.000	**6178556**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Halogen-free wiring trunking including cover and base perforation to DIN EN 50085-2-3.

Cover






Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKVH D 50	Light grey	50	2000	24	11.000	**6178674**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Trunking cover for replacement requirements.

Wiring trunking, type LKV H 75075






Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LKVH N 75075	Light grey	2000	75x75	16	64.000	**6178559**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Halogen-free wiring trunking including cover and base perforation to DIN EN 50085-2-3.

Cover





Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKVH D 75	Light grey	75	2000	12	18.000	**6178678**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Trunking cover for replacement requirements.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.


Wiring trunking, type LKV H 75100

Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LKVH N 75100	Light grey	2000	100x75	16	84.000	**6178563**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Halogen-free wiring trunking including cover and base perforation to DIN EN 50085-2-3.






Cover

Type	Colour	Dimension a mm	Length mm	Pack. m	Weight kg/100 m	Item No.
LKVH D 100	Light grey	100	2000	12	27.500	**6178682**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Trunking cover for replacement requirements.







Wiring trunking, type LKV H 75125

Type	Colour	Length mm	Dimension W x H mm	Pack. m	Weight kg/100 m	Item No.
LKVH N 75125	Light grey	2000	125x75	8	98.500	**6178566**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Halogen-free wiring trunking including cover and base perforation to DIN EN 50085-2-3.






Plastic rivet tool

Type	Colour	Dimension	Pack. pcs	Weight kg/100 pcs.	Item No.
KNW1	Black	Ø 4,5mm	1	9.300	**6178527**

POM Polyacetal (polyoxymethylene, polyformaldehyde)

Riveting tool for installing body-bound rivets 4.5 mm.






Plastic rivet tool

Type	Colour	Dimension	Pack. pcs	Weight kg/100 pcs.	Item No.
KNW2	Black	Ø 6mm	1	9.400	**6178529**

POM Polyacetal (polyoxymethylene, polyformaldehyde)

Riveting tool for mounting spreading rivets 6 mm.






Spreading rivet, KSN 1

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
KSN1	Light grey	100	0.026	**6178520**

PP Polypropylene

The riveting tool KNW1 should be used for rapid mounting and for the optimum function.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Body-bound rivet, KSN 22





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
KSN22	Light grey	100	0.070	**6178525**

PA Polyamide

The riveting tool KNW2 should be used for rapid mounting and for the optimum function. Dimension of the drill hole: 6.5 mm.

Release pliers





Type	Pack. pcs	Weight kg/100 pcs.	Item No.
AKZ	1	20.000	**6178535**

St Steel

To notch the bars down to the trunking base.

Support rail





Type	Version	Material thickness mm	Length mm	Bundle m	Weight kg/100 m	Item No.
2064 GTP 2M	Unperforated	1.5	2000	20	70.000	**1115057**


St Steel

GTP Electrogalvanised, transparently passivated

G rail G32 to DIN EN 60715 (previously DIN EN 50035).

Support rail perforated





Type	Version	Material thickness mm	Length mm	Bundle m	Weight kg/100 m	Item No.
2064 GTPL 2M	Perforated	1.5	2000	20	69.000	**1115065**


St Steel

GTP Electrogalvanised, transparently passivated

G rail G32 to DIN EN 60715 (previously DIN EN 50035).

Hat profile rail, unperforated





Type	Version	Material thickness mm	Length mm	Bundle m	Weight kg/100 m	Item No.
2069 2M GTP	Unperforated	1	2000	50	36.040	**1115650**


St Steel

GTP Electrogalvanised, transparently passivated

Hat profile rail 35 x 7.5 mm to DIN EN 60715 (formerly DIN EN 50022).

Hat profile rail, perforated





Type	Version	Material thickness mm	Length mm	Bundle m	Weight kg/100 m	Item No.
2069 2M GTPL	Perforated	1	2000	50	33.280	**1115669**

St Steel

GTP Electrogalvanised, transparently passivated

Hat profile rail 35 x 7.5 mm to DIN EN 60715 (formerly DIN EN 50022).

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.




Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Installing intelligently

Rapid 45-2 device installation trunking & Modul 45


Rapid 45-2
The new Rapid 45 generation combines symmetrical design, homogenous colour quality and technical flexibility in one system. Innovative fittings allow practical wall installations in administrative buildings, commercial areas and in industry.

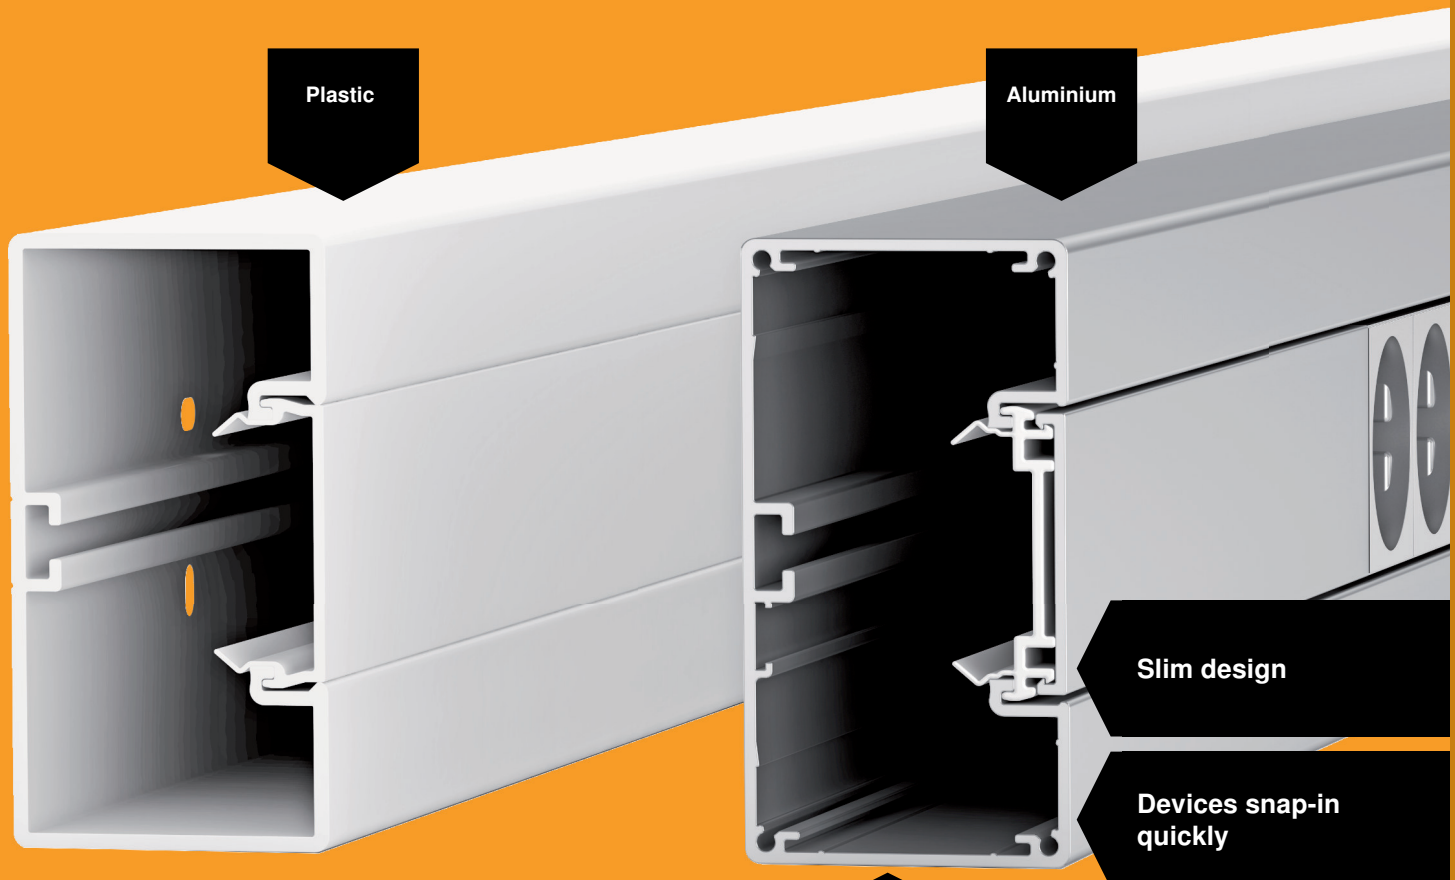

Slim design

Devices snap-in quickly

Extensive range of accessories

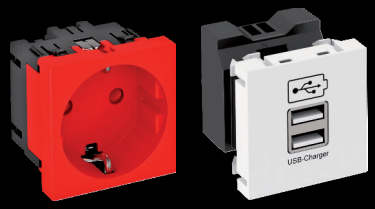


Modul 45 installation devices
- Space-saving installation
- Extensive range of switches, sockets and data technology equipment
- Simple and quick planning

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Device installation trunking Rapid 45-2, type GK-53100






Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-53100RW	Pure white	2000	12	130.300	**6113000**
GK-53100LGR	Light grey	2000	12	130.300	**6113002**

PVC Polyvinylchloride

Trunking base and cover with base perforation for direct wall mounting.

Trunking connector and joint cover






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-KS45-1RW	Pure white	6	0.861	**6113020**
GK-KS45-1LGR	Light grey	6	0.861	**6113022**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Joint cover for the bases of the Rapid 45-2 device installation trunking to hide cut edges and provide a perfect connection of the trunking segments. The joint covers are attached. Suitable for trunking width 100 mm and 165 mm.

Flat angle






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-FS53100RW	Pure white	1	34.600	**6113080**
GK-FS53100LGR	Light grey	1	34.600	**6113082**

PVC Polyvinylchloride

Flat angle for changing the direction of the Rapid 45-2 device installation trunking.

Flat angle cover






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-FH53100RW	Pure white	2	10.911	**6113090**
GK-FH53100LGR	Light grey	2	10.911	**6113092**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Flat angle as hood fitting for changing the direction of the Rapid 45-2 device installation trunking.

Internal corner






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-IS53100RW	Pure white	1	34.200	**6113060**
GK-IS53100LGR	Light grey	1	34.200	**6113062**

PVC Polyvinylchloride

90° internal corner for changing the direction of the Rapid 45-2 device installation trunking.

Internal corner cover



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-IH53100RW	Pure white	1	12.856	**6113070**
GK-IH53100LGR	Light grey	1	12.856	**6113072**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Internal corner for changing the direction of Rapid 45 device installation trunking.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.

External corner

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-AS53100RW	Pure white	1	40.400	**6113040**
GK-AS53100LGR	Light grey	1	40.400	**6113042**

PVC Polyvinylchloride

90° fixed external corner for changing the direction of Rapid 45-2 device installation trunking.




External corner cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-AH53100RW	Pure white	1	7.153	**6113050**
GK-AH53100LGR	Light grey	1	7.153	**6113052**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

External corner for changing the direction of Rapid 45-2 device installation trunking. The fittings can be adjusted between 80–110°.






T piece adapter

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-TR53100RW	Pure white	1	3.405	**6113100**
GK-TR53100LGR	Light grey	1	3.405	**6113102**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

T-piece to create a 90° -junction of the system size 53100 on the system size 53100th




T piece adapter WDK 40060

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-TA WDK 1RW	Pure white	1	3.002	**6113310**
GK-TA WDK 1LGR	Light grey	1	2.940	**6113312**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

T-piece adapter to create a 90° junction from the system size Rapid 45-2 53100 and 53165 on a cable trunking WDK40060.




End piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-E53100RW	Pure white	1	2.493	**6113110**
GK-E53100LGR	Light grey	1	2.493	**6113112**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

End piece for lateral closing the device installation trunking, Rapid 45-2 GK and GA 53100.






Cover

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-OT45RW	Pure white	2000	24	20.550	**6113010**
GK-OT45LGR	Light grey	2000	24	20.550	**6113012**

PVC Polyvinylchloride

Trunking cover for closing the Rapid 45-2 device installation trunking.






Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Trunking height 53 mm, trunking width 100 mm

Joint cover






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTSA45RW	Pure white	6	0.624	**6113030**
GK-OTSA45LGR	Light grey	6	0.624	**6113032**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Joint cover for the covers of the Rapid 45-2 device installation trunking to hide cut edges and provide a tidy connection to installed Modul 45 devices.

Partition





Type	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-TW53	2000	40	28.700	**6113290**


PVC Polyvinylchloride

Partition for mounting in Rapid 45-2 GK and GA device installation trunking for installing cables of different voltage levels.

Trunking height 53 mm, trunking width 130 mm

Device installation trunking Rapid 45-2, Type GK-53130






Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-53130RW	Pure white	2000	8	174.000	**6113200**
GK-53130LGR	Light grey	2000	8	174.000	**6113202**

PVC Polyvinylchloride

Trunking base and cover with base perforation for direct wall mounting.

Trunking connector and joint cover






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-KS45-2RW	Pure white	6	0.707	**6113210**
GK-KS45-2LGR	Light grey	6	0.707	**6113212**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Joint cover for the bases of the Rapid 45 device installation trunking to hide cut edges and provide a perfect connection of the trunking segments. The joint covers are attached. Suitable for trunking width 130 mm.

Flat angle






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-FS53130RW	Pure white	1	60.200	**6113260**
GK-FS53130LGR	Light grey	1	60.200	**6113262**

PVC Polyvinylchloride

Flat angle for changing the direction of the Rapid 45-2 device installation trunking.

Flat angle cover





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-FH53130RW	Pure white	2	14.754	**6113270**
GK-FH53130LGR	Light grey	2	14.754	**6113272**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Flat angle as hood fitting for changing the direction of the Rapid 45-2 device installation trunking.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.


Internal corner

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-IS53130RW	Pure white	1	44.400	**6113240**
GK-IS53130LGR	Light grey	1	44.400	**6113242**

PVC Polyvinylchloride

90° internal corner for changing the direction of the Rapid 45-2 device installation trunking.






Internal corner cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-IH53130RW	Pure white	1	14.730	**6113250**
GK-IH53130LGR	Light grey	1	14.730	**6113252**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Internal corner for changing the direction of Rapid 45 device installation trunking.




External corner

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-AS53130RW	Pure white	1	56.200	**6113220**
GK-AS53130LGR	Light grey	1	56.200	**6113222**

PVC Polyvinylchloride

External corner for changing the direction of Rapid 45-2 device installation trunking.




External corner cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-AH53130RW	Pure white	1	8.440	**6113230**
GK-AH53130LGR	Light grey	1	8.440	**6113232**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

External corner for changing the direction of Rapid 45-2 device installation trunking. The fittings can be adjusted between 80–110°.






T piece adapter

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-TR53130RW	Pure white	1	3.514	**6113300**
GK-TR53130LGR	Light grey	1	3.514	**6113302**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

T-piece adapter to create a 90° -junction of the system size 53130 on the system size 53130.




T piece adapter on WDK 40060

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-TA WDK 2RW	Pure white	1	2.717	**6113320**
GK-TA WDK 2LGR	Light grey	1	2.670	**6113322**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

T-piece adapter to create a 90° junction from the system size Rapid 45-2 53130 to a cable trunking WDK40060.




Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Trunking height 53 mm, trunking width 130 mm

End piece






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-E53130RW	Pure white	1	2.972	**6113280**
GK-E53130LGR	Light grey	1	2.972	**6113282**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

End piece for side closing of the Rapid 45-2 GK and GA 53130 device installation trunking.

Cover






Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-OT45RW	Pure white	2000	24	20.550	**6113010**
GK-OT45LGR	Light grey	2000	24	20.550	**6113012**

PVC Polyvinylchloride

Trunking cover for closing the Rapid 45-2 device installation trunking.

Joint cover






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTSA45RW	Pure white	6	0.624	**6113030**
GK-OTSA45LGR	Light grey	6	0.624	**6113032**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Joint cover for the covers of the Rapid 45-2 device installation trunking to hide cut edges and provide a tidy connection to installed Modul 45 devices.

Partition





Type	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-TW53	2000	40	28.700	**6113290**


PVC Polyvinylchloride

Partition for mounting in Rapid 45-2 GK and GA device installation trunking for installing cables of different voltage levels.

Trunking height 53 mm, trunking width 165 mm

Device installation trunking Rapid 45-2, Type GK-53165






Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-53165RW	Pure white	2000	8	216.250	**6113400**
GK-53165LGR	Light grey	2000	8	216.250	**6113402**

PVC Polyvinylchloride

Trunking base and cover with base perforation for direct wall mounting.

Trunking connector and joint cover





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-KS45-1RW	Pure white	6	0.861	**6113020**
GK-KS45-1LGR	Light grey	6	0.861	**6113022**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Joint cover for the bases of the Rapid 45-2 device installation trunking to hide cut edges and provide a perfect connection of the trunking segments. The joint covers are attached. Suitable for trunking width 100 mm and 165 mm.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.

Flat angle

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-FS53165RW	Pure white	1	64.500	6113450
GK-FS53165LGR	Light grey	1	64.500	6113452

PVC Polyvinylchloride

Flat angle for changing the direction of the Rapid 45-2 device installation trunking.






Flat angle cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-FH53165RW	Pure white	2	16.300	6113460
GK-FH53165LGR	Light grey	2	16.300	6113462

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Flat angle as hood fitting for changing the direction of the Rapid 45-2 device installation trunking.







Internal corner

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-IS53165RW	Pure white	1	54.500	6113430
GK-IS53165LGR	Light grey	1	54.500	6113432

PVC Polyvinylchloride

90° internal corner for changing the direction of the Rapid 45-2 device installation trunking.






Internal corner cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-IH53165RW	Pure white	1	15.634	6113440
GK-IH53165LGR	Light grey	1	15.634	6113442

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Internal corner for changing the direction of Rapid 45 device installation trunking.




External corner

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-AS53165RW	Pure white	1	66.800	6113410
GK-AS53165LGR	Light grey	1	66.800	6113412

PVC Polyvinylchloride

External corner for changing the direction of Rapid 45-2 device installation trunking.




External corner cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-AH53165RW	Pure white	1	9.230	6113420
GK-AH53165LGR	Light grey	1	9.230	6113422

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

External corner for changing the direction of Rapid 45-2 device installation trunking. The fittings can be adjusted between 80–110°.






Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

T piece adapter




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-TR53165RW	Pure white	1	4.545	**6113480**
GK-TR53165LGR	Light grey	1	4.515	**6113482**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

T-piece adapter to create a 90° -juction of the system size 53165 on the system size 53165.

T piece adapter WDK 40060




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-TA WDK 1RW	Pure white	1	3.002	**6113310**
GK-TA WDK 1LGR	Light grey	1	2.940	**6113312**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

T-piece adapter to create a 90° junction from the system size Rapid 45-2 53100 and 53165 on a cable trunking WDK40060.

End piece






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-E53165RW	Pure white	1	3.561	**6113470**
GK-E53165LGR	Light grey	1	3.561	**6113472**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

End piece for side closing of the Rapid 45-2 GK and GA 53165 device installation trunking.

Cover






Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-OT45RW	Pure white	2000	24	20.550	**6113010**
GK-OT45LGR	Light grey	2000	24	20.550	**6113012**

PVC Polyvinylchloride

Trunking cover for closing the Rapid 45-2 device installation trunking.

Joint cover






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTSA45RW	Pure white	6	0.624	**6113030**
GK-OTSA45LGR	Light grey	6	0.624	**6113032**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Joint cover for the covers of the Rapid 45-2 device installation trunking to hide cut edges and provide a tidy connection to installed Modul 45 devices.

Partition





Type	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-TW53	2000	40	28.700	**6113290**

PVC Polyvinylchloride

Partition for mounting in Rapid 45-2 GK and GA device installation trunking for installing cables of different voltage levels.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten.indd / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


Device installation trunking Rapid 45-2, Type GA-53100

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GA-53100EL	—	2000	8	223.800	**6112403**
GA-53100RW	Pure white	2000	8	223.800	**6112400**

Alu Aluminium

EL Anodised

Aluminium complete device installation trunking, consisting of a base and cover. The base has no floor perforation.





Trunking connector and joint cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-KS45-1AL	Aluminium	1	0.580	**6113024**
GK-KS45-1RW	Pure white	6	0.861	**6113020**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Joint cover for the bases of the Rapid 45-2 device installation trunking to hide cut edges and provide a perfect connection of the trunking segments. The joint covers are attached. Suitable for trunking width 100 mm and 165 mm.






Flat angle

Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-FS53100EL	—	Anodised	1	69.200	**6112443**
GA-FS53100RW	Pure white	—	1	69.200	**6112440**

Alu Aluminium

EL Anodised

90° aluminium flat angle for direction change of Rapid 45-2 GA... device installation trunking.






Flat angle cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-FH53100AL	Aluminium	2	9.800	**6113094**
GK-FH53100RW	Pure white	2	10.911	**6113090**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Flat angle as hood fitting for changing the direction of the Rapid 45-2 device installation trunking.






Internal corner

Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-IS53100EL	—	Anodised	1	69.200	**6112433**
GA-IS53100RW	Pure white	—	1	69.200	**6112430**

Alu Aluminium

EL Anodised

Corner 90° aluminium for changing the direction of device installation trunking Rapid 45-2 GA...






Internal corner cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-IH53100AL	Aluminium	1	12.000	**6113074**
GK-IH53100RW	Pure white	1	12.856	**6113070**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Internal corner for changing the direction of Rapid 45 device installation trunking.






Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

External corner





Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-AS53100EL	—	Anodised	1	84.100	**6112423**
GA-AS53100RW	Pure white	—	1	84.100	**6112420**


Alu Aluminium

EL Anodised

Outside corner 90° aluminium for changing the direction of device installation trunking Rapid 45-2 GA...

External corner cover






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-AH53100AL	Aluminium	1	6.900	**6113054**
GK-AH53100RW	Pure white	1	7.153	**6113050**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

External corner for changing the direction of Rapid 45-2 device installation trunking. The fittings can be adjusted between 80–110°.

T piece adapter






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-TR53100AL	Aluminium	1	3.405	**6113104**
GK-TR53100RW	Pure white	1	3.405	**6113100**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

T-piece to create a 90° -junction of the system size 53100 on the system size 53100th

T piece adapter WDK 40060






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-TA WDK 1AL	Aluminium	1	3.002	**6113314**
GK-TA WDK 1RW	Pure white	1	3.002	**6113310**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

T-piece adapter to create a 90° junction from the system size Rapid 45-2 53100 and 53165 on a cable trunking WDK40060.

End piece






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-E53100AL	Aluminium	1	2.200	**6113114**
GK-E53100RW	Pure white	1	2.493	**6113110**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

End piece for lateral closing the device installation trunking, Rapid 45-2 GK and GA 53100.

Cover





Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GA-OT45EL	—	Anodised	2000	20	47.450	**6112413**
GA-OT45RW	Pure white	—	2000	20	47.450	**6112410**

Alu Aluminium

EL Anodised

Cover for closing the device installation trunking of the series Rapid 45-2 GA .... The 2-piece shell is made of a PVC-base profile and an aluminium screening profile.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Joint cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTSA45AL	Aluminium	1	0.550	**6113034**
GK-OTSA45RW	Pure white	6	0.624	**6113030**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Joint cover for the covers of the Rapid 45-2 device installation trunking to hide cut edges and provide a tidy connection to installed Modul 45 devices.






Partition

Type	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-TW53	2000	40	28.700	**6113290**

PVC Polyvinylchloride

Partition for mounting in Rapid 45-2 GK and GA device installation trunking for installing cables of different voltage levels.






Device installation trunking Rapid 45-2, Type GA-53130

Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GA-53130EL	—	Anodised	2000	8	326.500	**6112503**
GA-53130RW	Pure white	—	2000	8	326.500	**6112500**

Alu Aluminium

EL Anodised

Aluminium complete device installation trunking, consisting of a base and cover. The base has no floor perforation.






Trunking connector and joint cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-KS45-2AL	Aluminium	1	0.450	**6113214**
GK-KS45-1RW	Pure white	6	0.861	**6113020**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Joint cover for the bases of the Rapid 45 device installation trunking to hide cut edges and provide a perfect connection of the trunking segments. The joint covers are attached. Suitable for trunking width 130 mm.






Flat angle

Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-FS53130EL	—	Anodised	1	119.900	**6112533**
GA-FS53130RW	Pure white	—	1	119.900	**6112530**

Alu Aluminium

EL Anodised

90° aluminium flat angle for direction change of Rapid 45-2 GA... device installation trunking.






Flat angle cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-FH53130AL	Aluminium	2	12.700	**6113274**
GK-FH53130RW	Pure white	2	14.754	**6113270**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Flat angle as hood fitting for changing the direction of the Rapid 45-2 device installation trunking.







Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Internal corner





Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-IS53130EL	—	Anodised	1	89.200	**6112523**
GA-IS53130RW	Pure white	—	1	89.200	**6112520**


Alu Aluminium

EL Anodised

Corner 90° aluminium for changing the direction of device installation trunking Rapid 45-2 GA...

Internal corner cover






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-IH53130AL	Aluminium	1	13.170	**6113254**
GK-IH53130RW	Pure white	1	14.730	**6113250**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Internal corner for changing the direction of Rapid 45 device installation trunking.

External corner





Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-AS53130EL	—	2000	1	117.700	**6112513**
GA-AS53130RW	Pure white	2000	1	117.700	**6112510**


Alu Aluminium

EL Anodised

Outside corner 90° aluminium for changing the direction of device installation trunking Rapid 45-2 GA...

External corner cover






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-AH53130AL	Aluminium	1	8.000	**6113234**
GK-AH53130RW	Pure white	1	8.440	**6113230**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

External corner for changing the direction of Rapid 45-2 device installation trunking. The fittings can be adjusted between 80–110°.

T piece adapter






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-TR53130AL	Aluminium	1	3.514	**6113304**
GK-TR53130RW	Pure white	1	3.514	**6113300**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

T-piece adapter to create a 90° -junction of the system size 53130 on the system size 53130.

T piece adapter on WDK 40060





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-TA WDK 2AL	Aluminium	1	2.200	**6113324**
GK-TA WDK 2RW	Pure white	1	2.717	**6113320**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

T-piece adapter to create a 90° junction from the system size Rapid 45-2 53130 to a cable trunking WDK40060.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.

End piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-E53130AL	Aluminium	1	2.700	**6113284**
GK-E53130RW	Pure white	1	2.972	**6113280**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

End piece for side closing of the Rapid 45-2 GK and GA 53130 device installation trunking.






Cover

Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GA-OT45EL	—	Anodised	2000	20	47.450	**6112413**
GA-OT45RW	Pure white	—	2000	20	47.450	**6112410**

Alu Aluminium

EL Anodised

Cover for closing the device installation trunking of the series Rapid 45-2 GA .... The 2-piece shell is made of a PVC-base profile and an aluminium screening profile.






Joint cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTSA45AL	Aluminium	1	0.550	**6113034**
GK-OTSA45RW	Pure white	6	0.624	**6113030**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Joint cover for the covers of the Rapid 45-2 device installation trunking to hide cut edges and provide a tidy connection to installed Modul 45 devices.






Partition

Type	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-TW53	2000	40	28.700	**6113290**

PVC Polyvinylchloride

Partition for mounting in Rapid 45-2 GK and GA device installation trunking for installing cables of different voltage levels.






Device installation trunking Rapid 45-2, Type GA-53165

Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GA-53165EL	—	Anodised	2000	6	370.750	**6112603**
GA-53165RW	Pure white	—	2000	6	370.750	**6112600**

Alu Aluminium

EL Anodised

Aluminium complete device installation trunking, consisting of a base and cover. The base has no floor perforation.






Trunking connector and joint cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-KS45-1AL	Aluminium	1	0.580	**6113024**
GK-KS45-1RW	Pure white	6	0.861	**6113020**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Joint cover for the bases of the Rapid 45-2 device installation trunking to hide cut edges and provide a perfect connection of the trunking segments. The joint covers are attached. Suitable for trunking width 100 mm and 165 mm.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Flat angle





Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-FS53165EL	—	Anodised	1	121.900	**6112633**
GA-FS53165RW	Pure white	—	1	121.900	**6112630**


Alu Aluminium

EL Anodised

90° aluminium flat angle for direction change of Rapid 45-2 GA... device installation trunking.

Flat angle cover






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-FH53165AL	Aluminium	2	16.300	**6113464**
GK-FH53165RW	Pure white	2	16.300	**6113460**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Flat angle as hood fitting for changing the direction of the Rapid 45-2 device installation trunking.

Internal corner





Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-IS53165EL	—	Anodised	1	100.100	**6112623**
GA-IS53165RW	Pure white	—	1	100.100	**6112620**


Alu Aluminium

EL Anodised

Corner 90° aluminium for changing the direction of device installation trunking Rapid 45-2 GA...

Internal corner cover






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-IH53165AL	Aluminium	1	14.660	**6113444**
GK-IH53165RW	Pure white	1	15.634	**6113440**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Internal corner for changing the direction of Rapid 45 device installation trunking.

External corner





Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-AS53165EL	—	Anodised	1	114.200	**6112613**
GA-AS53165RW	Pure white	—	1	114.200	**6112610**


Alu Aluminium

EL Anodised

Outside corner 90° aluminium for changing the direction of device installation trunking Rapid 45-2 GA...

External corner cover





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-AH53165AL	Aluminium	1	9.230	**6113424**
GK-AH53165RW	Pure white	1	9.230	**6113420**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

External corner for changing the direction of Rapid 45-2 device installation trunking. The fittings can be adjusted between 80–110°.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

T piece adapter

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-TR53165AL	Aluminium	1	4.040	**6113484**
GK-TR53165RW	Pure white	1	4.545	**6113480**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

T-piece adapter to create a 90° -juction of the system size 53165 on the system size 53165.






T piece adapter WDK 40060

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-TA WDK 1AL	Aluminium	1	3.002	**6113314**
GK-TA WDK 1RW	Pure white	1	3.002	**6113310**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

T-piece adapter to create a 90° junction from the system size Rapid 45-2 53100 and 53165 on a cable trunking WDK40060.






End piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-E53165AL	Aluminium	1	3.240	**6113474**
GK-E53165RW	Pure white	1	3.561	**6113470**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

End piece for side closing of the Rapid 45-2 GK and GA 53165 device installation trunking.






Cover

Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GA-OT45EL	—	Anodised	2000	20	47.450	**6112413**
GA-OT45RW	Pure white	—	2000	20	47.450	**6112410**

Alu Aluminium

EL Anodised

Cover for closing the device installation trunking of the series Rapid 45-2 GA .... The 2-piece shell is made of a PVC-base profile and an aluminium screening profile.






Joint cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTSA45AL	Aluminium	1	0.550	**6113034**
GK-OTSA45RW	Pure white	6	0.624	**6113030**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Joint cover for the covers of the Rapid 45-2 device installation trunking to hide cut edges and provide a tidy connection to installed Modul 45 devices.





Partition

Type	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-TW53	2000	40	28.700	**6113290**

PVC Polyvinylchloride

Partition for mounting in Rapid 45-2 GK and GA device installation trunking for installing cables of different voltage levels.





Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (ULExport_02579) / 2019/04/18

Simply versatile

Rapid 80 device installation trunking

Our Rapid 80 plastic device installation trunking is now available in a halogen-free version. In the case of fire, the self-extinguishing plastic reduces the amount of poisonous smoke gases.




Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Device installation trunking, type GK70110






Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-70110RW	Pure white	2000	8	132.000	6274300
GK-70110CW	Cream	2000	8	132.000	6274301
GK-70110LGR	Light grey	2000	8	132.000	6274302
GK-70110GR	Stone grey	2000	8	132.000	6274306

PVC Polyvinylchloride

GK device installation trunking, made of lead-free PVC, suitable for installing directly on the wall or on wall panels. Fastening takes place using the perforation in the trunking. The GK device installation trunking possesses a C profile on the floor to accept a plastic partition. All the switch programmes with a support ring and support clamp design as well as Modul 45 installation devices can be installed in the accessory mounting boxes of series 71GD.... The system opening is 76.5 mm. On each trunking length, a coupling pair is pre-assembled on one side. The cover must be ordered separately.

Coupling






Type	Colour	Pack. PU	Weight kg/100 PUs	Item No.
GK-KUP	Light grey	1	2.140	6274650

ABS/ASA Acrylonitrile butadiene styrene

Coupling as trunking connector for tight connection of the trunking sections. A coupling pair is included and pre-mounted for each stock length.

Plastic trunking cover, smooth






Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-OTGRW	Pure white	2000	16	27.500	6278680

PVC Polyvinylchloride

Smooth trunking cover, for closing device installation trunking with 76.5 mm system opening.

Plastic trunking cover, fluted






Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-OTKCW	Cream	2000	16	27.000	6278781
GK-OTKLGR	Light grey	2000	16	27.000	6278782

PVC Polyvinylchloride

Fluted trunking cover, for closing device installation trunking with 76.5 mm system opening.

External corner cover, variable






Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-AH70110CW	Cream	130.5	1	15.000	6274211
GK-AH70110LGR	Light grey	130.5	1	15.000	6274212

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

External corner cover made of halogen-free PC/ABS for changing the direction of Rapid 80 device installation trunking of the GK, GKH, GS and GA systems. The fittings can be variably adjusted between 80° and 100° and can be used in symmetrical and asymmetrical trunking.

External corner





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-A70110RW	Pure white	1	116.000	6274310
GK-A70110CW	Cream	1	116.000	6274311
GK-A70110LGR	Light grey	1	116.000	6274312
GK-A70110GR	Stone grey	1	116.000	6274316

PVC Polyvinylchloride

External corner for changing the direction of the GK device installation trunking.

Always indicate the item number when ordering.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Flat angle cover

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-FH70110CW	Cream	152.5	1	15.100	6274221
GK-FH70110LGR	Light grey	152.5	1	15.100	6274222

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Flat angle cover fitting made of halogen-free PC/ABS for simple creation of a rising or falling 90° change of direction with device installation trunking of the series Rapid 80 GK, GKH, GS and GA. The flat angle cover fitting can be used for symmetrical and asymmetrical trunking types.






Flat angle

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-F70110RW	Pure white	1	78.000	6274320
GK-F70110CW	Cream	1	78.000	6274321
GK-F70110LGR	Light grey	1	78.000	6274322
GK-F70110GR	Stone grey	1	78.000	6274326

PVC Polyvinylchloride

Flat angle for changing the direction of the GK device installation trunking.






Flat angle cover, smooth

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-OTGFLGR	Light grey	1	17.000	6274492

PVC Polyvinylchloride

Flat angle cover, smooth surface.






Internal corner cover, variable

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-IH70110CW	Cream	1	14.200	6274241
GK-IH70110LGR	Light grey	1	14.200	6274282

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Internal corner cover made of halogen-free PC/ABS for changing the direction of Rapid 80 device installation trunking of the GK, GKH GS and GA systems. The fittings can be variably adjusted between 85° and 95° and can be used in symmetrical and asymmetrical trunking.






Internal corner

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-I70110RW	Pure white	1	100.000	6274340
GK-I70110CW	Cream	1	100.000	6274341
GK-I70110LGR	Light grey	1	100.000	6274342
GK-I70110GR	Stone grey	1	100.000	6274346

PVC Polyvinylchloride

Internal corner for changing the direction of the GK device installation trunking.






T-piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-T70110RW	Pure white	1	100.000	6274360
GK-T70110CW	Cream	1	100.000	6274361
GK-T70110LGR	Light grey	1	100.000	6274362
GK-T70110GR	Stone grey	1	100.000	6274366

PVC Polyvinylchloride

T piece for changing the direction of the GK device installation trunking.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Trunking height 70 mm, trunking width 110 mm

End piece






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-E70110RW	Pure white	1	5.009	**6274370**
GK-E70110CW	Cream	1	5.009	**6274371**
GK-E70110LGR	Light grey	1	5.009	**6274372**
GK-E70110GR	Stone grey	1	5.009	**6274376**

PVC Polyvinylchloride

End piece for closing the GK device installation trunking.

Partition





Type	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-TW70	2000	40	17.400	**6274900**


PVC Polyvinylchloride

Partition for mounting in Rapid 80 GK, GA and Rapid IBIS device installation trunking or ISS service poles for installing cables of different voltage levels.

Trunking height 70 mm, trunking width 130 mm

Device installation trunking, type GK70130






Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-70130RW	Pure white	2000	8	152.000	**6274500**

PVC Polyvinylchloride

GK device installation trunking, made of lead-free PVC, suitable for installing directly on the wall or on wall panels. Fastening takes place using the perforation in the trunking. The GK device installation trunking possesses a C profile on the floor to accept a plastic partition. All the switch programmes with a support ring and support clamp design as well as Modul 45 installation devices can be installed in the accessory mounting boxes of series 71GD.... The system opening is 76.5 mm. On each trunking length, a coupling pair is pre-assembled on one side. The cover must be ordered separately.

Coupling






Type	Colour	Pack. PU	Weight kg/100 PUs	Item No.
GK-KUP	Light grey	1	2.140	**6274650**

ABS/ASA Acrylonitrile butadiene styrene

Coupling as trunking connector for tight connection of the trunking sections. A coupling pair is included and pre-mounted for each stock length.

Plastic trunking cover, smooth






Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-OTGRW	Pure white	2000	16	27.500	**6278680**

PVC Polyvinylchloride

Smooth trunking cover, for closing device installation trunking with 76.5 mm system opening.

Flat angle cover





Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-FH70130RW	Pure white	172.5	1	17.100	**6274420**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Flat angle cover fitting made of halogen-free PC/ABS for simple creation of a rising or falling 90° change of direction with device installation trunking of the series Rapid 80 GK, GKH, GS and GA. The flat angle cover fitting can be used for symmetrical and asymmetrical trunking types.

Always indicate the item number when ordering.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Flat angle

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-F70130RW	Pure white	1	83.000	**6274520**

PVC Polyvinylchloride

Flat angle for changing the direction of the GK device installation trunking.






Internal corner

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-I70130RW	Pure white	1	110.000	**6274540**

PVC Polyvinylchloride

Internal corner for changing the direction of the GK device installation trunking.






T-piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-T70130RW	Pure white	1	108.000	**6274560**

PVC Polyvinylchloride

T piece for changing the direction of the GK device installation trunking.






End piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-E70130RW	Pure white	1	5.574	**6274570**

PVC Polyvinylchloride

End piece for closing the GK device installation trunking.






Partition

Type	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-TW70	2000	40	17.400	**6274900**

PVC Polyvinylchloride

Partition for mounting in Rapid 80 GK, GA and Rapid IBIS device installation trunking or ISS service poles for installing cables of different voltage levels.






Device installation trunking, type GK70170

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-70170RW	Pure white	2000	8	180.000	**6274700**

PVC Polyvinylchloride

GK device installation trunking, made of lead-free PVC, suitable for installing directly on the wall or on wall panels. Fastening takes place using the perforation in the trunking. The GK device installation trunking possesses a C profile on the floor to accept a plastic partition. All the switch programmes with a support ring and support clamp design as well as Modul 45 installation devices can be installed in the accessory mounting boxes of series 71GD.... The system opening is 76.5 mm. On each trunking length, a coupling pair is pre-assembled on one side. The cover must be ordered separately.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Coupling






Type	Colour	Pack. PU	Weight kg/100 PUs	Item No.
GK-KUP	Light grey	1	2.140	**6274650**

ABS/ASA Acrylonitrile butadiene styrene

Coupling as trunking connector for tight connection of the trunking sections. A coupling pair is included and pre-mounted for each stock length.

Plastic trunking cover, smooth






Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-OTGRW	Pure white	2000	16	27.500	**6278680**

PVC Polyvinylchloride

Smooth trunking cover, for closing device installation trunking with 76.5 mm system opening.

External corner






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-A70170RW	Pure white	1	149.000	**6274710**

PVC Polyvinylchloride

External corner for changing the direction of the GK device installation trunking.

Flat angle







Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-F70170RW	Pure white	1	91.000	**6274720**

PVC Polyvinylchloride

Flat angle for changing the direction of the GK device installation trunking.

Internal corner






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-I70170RW	Pure white	1	130.000	**6274740**

PVC Polyvinylchloride

Internal corner for changing the direction of the GK device installation trunking.

T-piece





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-T70170RW	Pure white	1	120.000	**6274760**

PVC Polyvinylchloride

T piece for changing the direction of the GK device installation trunking.

Always indicate the item number when ordering.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

End piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-E70170RW	Pure white	1	6.840	**6274770**

PVC Polyvinylchloride

End piece for closing the GK device installation trunking.






Partition

Type	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-TW70	2000	40	17.400	**6274900**

PVC Polyvinylchloride

Partition for mounting in Rapid 80 GK, GA and Rapid IBIS device installation trunking or ISS service poles for installing cables of different voltage levels.





Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.




Gesamtkatalog_KKT_LFS_EGS_UFS_2019_Belgie_Werbseiten / en / 2019/04/18 11:21:04 (LLEX_tgl_025769) / 2019/04/18 11:21:04

Device installation trunking, type GKH70130

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GKH-70130RW	Pure white	2000	8	121.000	**6114200**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

GKH device installation trunking made of halogen-free PC/ABS, suitable for direct wall mounting or on wall brackets. Fastening takes place using the perforation in the trunking. The GKH device installation trunking possesses a C profile on the floor to accept a plastic partition. All the switch programmes with a support ring and support clamp design as well as Modul 45 installation devices can be installed in the accessory mounting boxes of series 71GD.... The system opening is 76.5 mm. On each trunking length, a coupling pair is pre-assembled on one side.






Coupling

Type	Colour	Pack. PU	Weight kg/100 PUs	Item No.
GK-KUP	Light grey	1	2.140	**6274650**

ABS/ASA Acrylonitrile butadiene styrene

Coupling as trunking connector for tight connection of the trunking sections. A coupling pair is included and pre-mounted for each stock length.





Trunking cover, smooth

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GKH-OTGRW	Pure white	2000	16	22.000	**6114210**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Smooth trunking cover made of halogen-free PC/ABS, for closing device installation trunking with 80 mm system opening.






External corner

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GKH-A70130RW	Pure white	1	100.000	**6114220**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

External corner made of halogen-free PC/ABS for changing the direction of the GKH device installation trunking.






External corner cover, smooth

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GKH-OTGARW	Pure white	2	7.500	**6114230**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

PC/ABS external corner cover, smooth surface.




Flat angle cover

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-FH70130RW	Pure white	172.5	1	17.100	**6274420**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Flat angle cover fitting made of halogen-free PC/ABS for simple creation of a rising or falling 90° change of direction with device installation trunking of the series Rapid 80 GK, GKH, GS and GA. The flat angle cover fitting can be used for symmetrical and asymmetrical trunking types.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Flat angle






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GKH-F70130RW	Pure white	1	66.000	**6114240**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Flat angle made of halogen-free PC/ABS for changing the direction of the GKH device installation trunking.

Flat angle cover, smooth






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GKH-OTGFRW	Pure white	1	13.000	**6114250**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Flat angle cover made of halogen-free PC/ABS.

Internal corner






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GKH-I70130RW	Pure white	1	90.000	**6114260**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Internal corner made of halogen-free PC/ABS for changing the direction of the GKH device installation trunking.

T piece






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GKH-T70130RW	Pure white	1	82.000	**6114270**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

T piece made of halogen-free PC/ABS for changing the direction of the GKH device installation trunking.

End piece






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GKH-E70130RW	Pure white	1	5.203	**6114280**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

End piece made of halogen-free PC/ABS for closing the GKH device installation trunking.

Partition





Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GKH-TW70	Pure white	2000	40	14.000	**6114290**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Partition made of halogen-free PC/ABS for mounting in Rapid 80 GKH (GA) device installation trunking or ISS service poles for installing cables of different voltage levels.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.

Device installation trunking, type GKH70170

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GKH-70170RW	Pure white	2000	8	151.000	**6114300**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

GKH device installation trunking made of halogen-free PC/ABS, suitable for direct wall mounting or on wall brackets. Fastening takes place using the perforation in the trunking. The GKH device installation trunking possesses a C profile on the floor to accept a plastic partition. All the switch programmes with a support ring and support clamp design as well as Modul 45 installation devices can be installed in the accessory mounting boxes of series 71GD.... The system opening is 76.5 mm. On each trunking length, a coupling pair is pre-assembled on one side.






Coupling

Type	Colour	Pack. PU	Weight kg/100 PUs	Item No.
GK-KUP	Light grey	1	2.140	**6274650**

ABS/ASA Acrylonitrile butadiene styrene

Coupling as trunking connector for tight connection of the trunking sections. A coupling pair is included and pre-mounted for each stock length.






Trunking cover, smooth

Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GKH-OTGRW	Pure white	2000	16	22.000	**6114210**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Smooth trunking cover made of halogen-free PC/ABS, for closing device installation trunking with 80 mm system opening.






External corner

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GKH-A70170RW	Pure white	1	119.000	**6114320**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

External corner made of halogen-free PC/ABS for changing the direction of the GKH device installation trunking.






External corner cover, smooth

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GKH-OTGARW	Pure white	2	7.500	**6114230**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

PC/ABS external corner cover, smooth surface.




Flat angle

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GKH-F70170RW	Pure white	1	73.000	**6114340**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Flat angle made of halogen-free PC/ABS for changing the direction of the GKH device installation trunking.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Flat angle cover, smooth







Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GKH-OTGFRW	Pure white	1	13.000	6114250

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Flat angle cover made of halogen-free PC/ABS.

Internal corner






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GKH-I70170RW	Pure white	1	100.000	6114360

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Internal corner made of halogen-free PC/ABS for changing the direction of the GKH device installation trunking.

T-piece






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GKH-T70170RW	Pure white	1	96.000	6114370

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

T-piece made of halogen-free PC/ABS for changing the direction of the GKH device installation trunking.

End piece






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GKH-E70170RW	Pure white	1	6.144	6114380

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

End piece made of halogen-free PC/ABS for closing the GKH device installation trunking.

Partition





Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GKH-TW70	Pure white	2000	40	14.000	6114290

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Partition made of halogen-free PC/ABS for mounting in Rapid 80 GKH (GA) device installation trunking or ISS service poles for installing cables of different voltage levels.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.



Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


Device installation trunking, type GAS70110

Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GA-S70110EL	—	Anodised	2000	12	198.200	**6279203**
GA-S70110RW	Pure white	—	2000	12	198.200	**6279200**

Alu Aluminium

EL Anodised

Device installation trunking Without base perforation for direct wall mounting or mounting on panels. Over-lengths up to 6,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.






Coupling, trunking height 70 mm

Type	Trunking depth mm	Pack. PU	Weight kg/100 PUs	Item No.
GA-KUP70	70	1	5.800	**6279701**

V2A Stainless steel, grade 304

Joint connector for connecting the bases of Rapid 80 GA aluminium device installation trunking.






Cover

Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GA-OTRW	Pure white	—	2000	2	38.300	**6279720**
GA-OTEL	—	Anodised	2000	2	38.300	**6279723**

Alu Aluminium

EL Anodised

Aluminium cover, for closing Rapid GA device installation trunking and ISS service poles with a 76.5 mm system opening. The firm position of the cover and electrical contact to the lower part of the trunking and service pole is guaranteed thanks to type RKV3V locking brackets. There are 6 pre-mounted locking brackets included per delivery length (2,000 mm).






External corner

Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-SA70110EL	—	Anodised	1	159.400	**6279213**
GA-SA70110RW	Pure white	—	1	159.400	**6279210**

Alu Aluminium

EL Anodised

External corner suitable for direct wall mounting.






External corner cover

Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-OTARW	Pure white	—	300	1	12.900	**6279725**
GA-OTAEL	—	Anodised	300	1	12.900	**6279727**

Alu Aluminium

EL Anodised

External corner cover for mounting on the Rapid 80 GA external corner fitting.






Flat angle

Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-SF70110EL	—	Anodised	1	126.600	**6279223**
GA-SF70110RW	Pure white	—	1	126.600	**6279220**

Alu Aluminium

EL Anodised

Flat angle for changing the direction of the Rapid 80 GA aluminium device installation trunking.






Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Flat angle cover






Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-OTFRW	Pure white	—	400	1	28.600	**6279734**
GA-OTFEL	—	Anodised	400	1	28.600	**6279736**


Alu Aluminium

EL Anodised

Flat angle cover for mounting on the Rapid 80 GA flat angle fitting.

Internal corner





Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-SI70110EL	—	Anodised	1	137.400	**6279243**
GA-SI70110RW	Pure white	—	1	137.400	**6279240**


Alu Aluminium

EL Anodised

Internal corner for changing the direction of the Rapid 80 GA aluminium device installation trunking.

T-piece





Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-ST70110EL	—	Anodised	1	96.600	**6279263**
GA-ST70110RW	Pure white	—	1	96.600	**6279260**


Alu Aluminium

EL Anodised

T-piece for branches of Rapid 80 GA aluminium device installation trunking.

End piece aluminium





Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-E70110EL	—	Anodised	1	11.200	**6279273**
GA-E70110RW	Pure white	—	1	11.200	**6279270**


Alu Aluminium

EL Anodised

End piece for tidy closure of the Rapid 80 GA device installation trunking in aluminium.

End piece






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-E70110WA	White aluminium	1	4.900	**6274374**
GK-E70110RW	Pure white	1	5.009	**6274370**

PVC Polyvinylchloride PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

End piece for closing the GK device installation trunking.

Device installation trunking, type GAS70130





Type	Colour	Length mm	Pack. m	Weight kg/100 m	Item No.
GA-S70130EL	—	2000	12	219.700	**6279303**
GA-S70130RW	Pure white	2000	12	219.700	**6279300**

Alu Aluminium

EL Anodised

Device installation trunking Without base perforation for direct wall mounting or mounting on panels. Over-lengths up to 6,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


Device installation trunking, trunking height 90 mm

Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GA-S90130EL	—	Anodised	2000	8	241.300	**6276903**
GA-S90130RW	Pure white	—	2000	8	241.300	**6276900**

Alu Aluminium

EL Anodised

Device installation trunking Without base perforation for direct wall mounting or mounting on panels. Over-lengths up to 6,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.






Coupling, trunking height 70 mm

Type	Trunking depth mm	Pack. PU	Weight kg/100 PUs	Item No.
GA-KUP70	70	1	5.800	**6279701**

V2A Stainless steel, grade 304

Joint connector for connecting the bases of Rapid 80 GA aluminium device installation trunking.






Coupling, trunking height 90 mm

Type	Trunking depth mm	Pack. PU	Weight kg/100 PUs	Item No.
GA-KUP90	90	1	8.200	**6279704**

V2A Stainless steel, grade 304

Joint connector for connecting the bases of Rapid 80 GA aluminium device installation trunking.






Cover

Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GA-OTRW	Pure white	—	2000	2	38.300	**6279720**
GA-OTEL	—	Anodised	2000	2	38.300	**6279723**

Alu Aluminium

EL Anodised

Aluminium cover, for closing Rapid GA device installation trunking and ISS service poles with a 76.5 mm system opening. The firm position of the cover and electrical contact to the lower part of the trunking and service pole is guaranteed thanks to type RKV3V locking brackets. There are 6 pre-mounted locking brackets included per delivery length (2,000 mm).






External corner, trunking height 70 mm

Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-SA70130EL	—	Anodised	300	1	173.600	**6279313**
GA-SA70130RW	Pure white	—	300	1	173.600	**6279310**

Alu Aluminium

EL Anodised

External corner suitable for direct wall mounting.






External corner, trunking height 90 mm

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-SA90130EL	—	300	1	199.600	**6276913**
GA-SA90130RW	Pure white	300	1	199.600	**6276910**

Alu Aluminium

EL Anodised

External corner suitable for direct wall mounting.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

External corner cover





Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-OTARW	Pure white	—	300	1	12.900	**6279725**
GA-OTAEL	—	Anodised	300	1	12.900	**6279727**


Alu Aluminium

EL Anodised

External corner cover for mounting on the Rapid 80 GA external corner fitting.

Flat angle, trunking height 70 mm





Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-SF70130EL	Anodised	300	—	1	132.600	**6279323**
GA-SF70130RW	—	300	Pure white	1	132.600	**6279320**


Alu Aluminium

EL Anodised

Flat angle for changing the direction of the Rapid 80 GA aluminium device installation trunking.

Flat angle, trunking height 90 mm





Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-SF90130EL	Anodised	300	—	1	140.500	**6276923**
GA-SF90130RW	—	300	Pure white	1	140.500	**6276920**


Alu Aluminium

EL Anodised

Flat angle for changing the direction of the Rapid 80 GA aluminium device installation trunking.

Flat angle cover





Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-OTFRW	Pure white	—	400	1	28.600	**6279734**
GA-OTFEL	—	Anodised	400	1	28.600	**6279736**


Alu Aluminium

EL Anodised

Flat angle cover for mounting on the Rapid 80 GA flat angle fitting.

Internal corner, trunking height 70 mm





Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-SI70130EL	Anodised	300	—	1	148.800	**6279343**
GA-SI70130RW	—	300	Pure white	1	148.800	**6279340**


Alu Aluminium

EL Anodised

Internal corner for changing the direction of the Rapid 80 GA aluminium device installation trunking.

Internal corner, trunking height 90 mm





Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-SI90130EL	Anodised	300	—	1	163.800	**6276943**
GA-SI90130RW	—	300	Pure white	1	163.800	**6276940**

Alu Aluminium

EL Anodised

Internal corner for changing the direction of the Rapid 80 GA aluminium device installation trunking.

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


T-piece, trunking height 70 mm

Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-ST70130EL	Anodised	500	—	1	106.900	**6279363**
GA-ST70130RW	—	500	Pure white	1	106.900	**6279360**

Alu Aluminium

EL Anodised

T-piece for branches of Rapid 80 GA aluminium device installation trunking.






T-piece, trunking height 90 mm

Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-ST90130EL	Anodised	500	—	1	116.400	**6276963**
GA-ST90130RW	—	500	Pure white	1	116.400	**6276960**

Alu Aluminium

EL Anodised

T-piece for branches of Rapid 80 GA aluminium device installation trunking.






End piece aluminium, trunking height 70 mm

Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-E70130EL	Anodised	37	—	1	11.900	**6279373**
GA-E70130RW	—	37	Pure white	1	11.900	**6279370**

Alu Aluminium

EL Anodised

End piece for tidy closure of the Rapid 80 GA device installation trunking in aluminium.






End piece aluminium, trunking height 90 mm

Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-E90130EL	Anodised	37	—	1	14.500	**6276973**
GA-E90130RW	—	37	Pure white	1	14.500	**6276970**

Alu Aluminium

EL Anodised

End piece for tidy closure of the Rapid 80 GA device installation trunking in aluminium.






End piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-E70130RW	Pure white	1	5.574	**6274570**

PVC Polyvinylchloride

End piece for closing the GK device installation trunking.






Partition, trunking height 90 mm

Type	Length mm	Pack. m	Weight kg/100 m	Item No.
GA-TW90	2000	2	67.300	**6279714**

St Steel

Partition to divide the Rapid 80 GA and Rapid IBIS aluminium device installation trunking and ISS service poles for the installation of different voltage levels.






Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Device installation trunking, type GAS70170





Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GA-S70170EL	—	Anodised	2000	8	262.900	**6279103**
GA-S70170RW	Pure white	—	2000	8	262.900	**6279100**


Alu Aluminium

EL Anodised

Device installation trunking Without base perforation for direct wall mounting or mounting on panels. Over-lengths up to 6,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.

Coupling, trunking height 70 mm






Type	Trunking depth mm	Pack. PU	Weight kg/100 PUs	Item No.
GA-KUP70	70	1	5.800	**6279701**

V2A Stainless steel, grade 304

Joint connector for connecting the bases of Rapid 80 GA aluminium device installation trunking.

Cover






Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GA-OTRW	Pure white	—	2000	2	38.300	**6279720**
GA-OTEL	—	Anodised	2000	2	38.300	**6279723**


Alu Aluminium

EL Anodised

Aluminium cover, for closing Rapid GA device installation trunking and ISS service poles with a 76.5 mm system opening. The firm position of the cover and electrical contact to the lower part of the trunking and service pole is guaranteed thanks to type RKV3V locking brackets. There are 6 pre-mounted locking brackets included per delivery length (2,000 mm).

External corner





Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-SA70170EL	Anodised	300	—	1	202.200	**6279113**
GA-SA70170RW	—	300	Pure white	1	202.200	**6279110**


Alu Aluminium

EL Anodised

External corner suitable for direct wall mounting.

External corner cover





Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-OTARW	Pure white	—	300	1	12.900	**6279725**
GA-OTAEL	—	Anodised	300	1	12.900	**6279727**


Alu Aluminium

EL Anodised

External corner cover for mounting on the Rapid 80 GA external corner fitting.

Flat angle





Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-SF70170EL	—	300	1	142.600	**6279123**
GA-SF70170RW	Pure white	300	1	142.600	**6279121**

Alu Aluminium

EL Anodised

Flat angle for changing the direction of the Rapid 80 GA aluminium device installation trunking.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.


Flat angle cover

Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-OTFRW	Pure white	—	400	1	28.600	**6279734**
GA-OTFEL	—	Anodised	400	1	28.600	**6279736**

Alu Aluminium

EL Anodised

Flat angle cover for mounting on the Rapid 80 GA flat angle fitting.






Internal corner


Type	Surface finish	Length mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-SI70170EL	Anodised	2000	—	1	172.000	**6279143**
GA-SI70170RW	—	2000	Pure white	1	172.000	**6279140**

Alu Aluminium

EL Anodised

Internal corner for changing the direction of the Rapid 80 GA aluminium device installation trunking.






T-piece

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-ST70170EL	—	2000	1	127.600	**6279163**
GA-ST70170RW	Pure white	2000	1	127.600	**6279160**

Alu Aluminium

EL Anodised

T-piece for branches of Rapid 80 GA aluminium device installation trunking.






End piece aluminium

Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-E70170EL	—	Anodised	37	1	13.400	**6279473**
GA-ET70170RW	Pure white	—	37	1	13.400	**6279470**

Alu Aluminium

EL Anodised

End piece for tidy closure of the Rapid 80 GA device installation trunking in aluminium.






End piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-E70170RW	Pure white	1	6.840	**6274770**

PVC Polyvinylchloride

End piece for closing the GK device installation trunking.






Device installation trunking, type GAA70170

Type	Surface finish	Length mm	Colour	Pack. m	Weight kg/100 m	Item No.
GA-A70170EL	Anodised	2000	—	8	262.900	**6279403**
GA-A70170RW	—	2000	Pure white	8	262.900	**6279400**

Alu Aluminium

EL Anodised

Device installation trunking Without base perforation for direct wall mounting or mounting on panels. Over-lengths up to 6,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Coupling, trunking height 70 mm






Type	Trunking depth mm	Pack. PU	Weight kg/100 PUs	Item No.
GA-KUP70	70	1	5.800	**6279701**

V2A Stainless steel, grade 304

Joint connector for connecting the bases of Rapid 80 GA aluminium device installation trunking.

Cover





Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GA-OTRW	Pure white	—	2000	2	38.300	**6279720**
GA-OTEL	—	Anodised	2000	2	38.300	**6279723**


Alu Aluminium

EL Anodised

Aluminium cover, for closing Rapid GA device installation trunking and ISS service poles with a 76.5 mm system opening. The firm position of the cover and electrical contact to the lower part of the trunking and service pole is guaranteed thanks to type RKV3V locking brackets. There are 6 pre-mounted locking brackets included per delivery length (2,000 mm).

External corner, trunking height 70 mm





Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-AA70170EL	—	Anodised	1	202.200	**6279413**
GA-AA70170RW	Pure white	—	1	202.200	**6279410**


Alu Aluminium

EL Anodised

External corner suitable for direct wall mounting.

External corner cover





Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-OTARW	Pure white	—	300	1	12.900	**6279725**
GA-OTAEL	—	Anodised	300	1	12.900	**6279727**


Alu Aluminium

EL Anodised

External corner cover for mounting on the Rapid 80 GA external corner fitting.

Flat angle, rising, trunking height 70 mm





Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-AFS70170EL	—	Anodised	1	142.600	**6279423**
GA-AFS70170RW	Pure white	—	1	142.600	**6279420**


Alu Aluminium

EL Anodised

Flat angle for changing the direction of the Rapid 80 GA aluminium device installation trunking.

Flat angle, falling, trunking height 70 mm





Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-AFF70170EL	—	Anodised	1	132.600	**6279433**
GA-AFF70170RW	Pure white	—	1	132.600	**6279430**

Alu Aluminium

EL Anodised

Flat angle, falling, for changing the direction of the Rapid 80 GA aluminium device installation trunking.

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18


Flat angle cover

Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-OTFRW	Pure white	—	400	1	28.600	**6279734**
GA-OTFEL	—	Anodised	400	1	28.600	**6279736**

Alu Aluminium

EL Anodised

Flat angle cover for mounting on the Rapid 80 GA flat angle fitting.






Internal corner, trunking height 70 mm


Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-AI70170EL	—	Anodised	1	172.000	**6279443**
GA-AI70170RW	Pure white	—	1	172.000	**6279440**

Alu Aluminium

EL Anodised

Internal corner for changing the direction of the Rapid 80 GA aluminium device installation trunking.






T-piece, trunking height 70 mm

Type	Colour	Surface finish		Pack. pcs	Weight kg/100 pcs.	Item No.
GA-AT70170EL	—	Anodised	—	1	127.600	**6279463**
GA-AT70170RW	Pure white	—	—	1	127.600	**6279460**

Alu Aluminium

EL Anodised

T-piece for branches of Rapid 80 GA aluminium device installation trunking.






End piece aluminium

Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-E70170EL	—	Anodised	37	1	13.400	**6279473**
GA-ET70170RW	Pure white	—	37	1	13.400	**6279470**

Alu Aluminium

EL Anodised

End piece for tidy closure of the Rapid 80 GA device installation trunking in aluminium.






End piece

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GK-E70170RW	Pure white	1	6.840	**6274770**

PVC Polyvinylchloride

End piece for closing the GK device installation trunking.






Device installation trunking, type GAA90170

Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GA-A90170RW	Pure white	—	2000	6	284.500	**6279500**
GA-A90170EL	—	Anodised	2000	6	284.500	**6279503**

Alu Aluminium

EL Anodised

Device installation trunking Without base perforation for direct wall mounting or mounting on panels. Over-lengths up to 6,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.






Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

External corner, duct height 90 mm





Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-AA90170RW	Pure white	—	1	229.200	**6279510**
GA-AA90170EL	—	Anodised	1	229.200	**6279513**


Alu Aluminium

EL Anodised

External corner suitable for direct wall mounting.

Flat angle, rising, duct height 90 mm





Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-AFS90170RW	Pure white	—	1	159.400	**6279520**
GA-AFS90170EL	—	Anodised	1	159.400	**6279523**


Alu Aluminium

EL Anodised

Flat angle, rising, for changing the direction of the Rapid 80 GA aluminium device installation trunking.

Flat angle, falling, duct height 90 mm





Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-AFF90170RW	Pure white	—	1	149.400	**6279530**
GA-AFF90170EL	—	Anodised	1	149.400	**6279533**


Alu Aluminium

EL Anodised

Flat angle, falling, for changing the direction of the Rapid 80 GA aluminium device installation trunking.

Internal corner, duct height 90 mm





Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-AI90170RW	Pure white	—	1	186.400	**6279540**
GA-AI90170EL	—	Anodised	1	186.400	**6279543**


Alu Aluminium

EL Anodised

Internal corner for changing the direction of the Rapid 80 GA aluminium device installation trunking.

T piece, duct height 90 mm





Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-AT90170RW	Pure white	—	1	136.600	**6279560**
GA-AT90170EL	—	Anodised	1	136.600	**6279563**


Alu Aluminium

EL Anodised

T piece for branches of Rapid 80 GA aluminium device installation trunking.

End piece, duct height 90 mm





Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-E90170RW	Pure white	—	1	16.900	**6279570**
GA-E90170EL	—	Anodised	1	16.900	**6279573**

Alu Aluminium

EL Anodised

End piece for tidy closure of the Rapid 80 GA device installation trunking in aluminium.

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


Device installation trunking, type GAD90210

Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GA-D90210EL	—	Anodised	2000	6	378.600	**6279603**
GA-D90210RW	Pure white	—	2000	6	378.600	**6279600**

Alu Aluminium

EL Anodised

Device installation trunking Without base perforation for direct wall mounting or mounting on panels. Over-lengths up to 6,000 mm for trunking bases and covers as well as other RAL colours can be provided on request. The visible surfaces of the painted device installation trunking are laminated.






Coupling, trunking height 90 mm

Type	Trunking depth mm	Pack. PU	Weight kg/100 PUs	Item No.
GA-KUP90	90	1	8.200	**6279704**

V2A Stainless steel, grade 304

Joint connector for connecting the bases of Rapid 80 GA aluminium device installation trunking.






Cover

Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GA-OTRW	Pure white	—	2000	2	38.300	**6279720**
GA-OTEL	—	Anodised	2000	2	38.300	**6279723**

Alu Aluminium

EL Anodised

Aluminium cover, for closing Rapid GA device installation trunking and ISS service poles with a 76.5 mm system opening. The firm position of the cover and electrical contact to the lower part of the trunking and service pole is guaranteed thanks to type RKV3V locking brackets. There are 6 pre-mounted locking brackets included per delivery length (2,000 mm).






External corner, trunking height 90 mm


Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-DA90210EL	—	Anodised	1	291.000	**6279613**
GA-DA90210RW	Pure white	—	1	291.000	**6279610**

Alu Aluminium

EL Anodised

External corner suitable for direct wall mounting.






External corner cover

Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-OTARW	Pure white	—	300	1	12.900	**6279725**
GA-OTAEL	—	Anodised	300	1	12.900	**6279727**

Alu Aluminium

EL Anodised

External corner cover for mounting on the Rapid 80 GA external corner fitting.






Flat angle, trunking height 90 mm

Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-DF90210EL	—	Anodised	1	184.800	**6279623**
GA-DF90210RW	Pure white	—	1	184.800	**6279620**

Alu Aluminium

EL Anodised

Flat angle for changing the direction of the Rapid 80 GA aluminium device installation trunking.






Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Flat angle cover






Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-OTFRW	Pure white	—	400	1	28.600	**6279734**
GA-OTFEL	—	Anodised	400	1	28.600	**6279736**


Alu Aluminium

EL Anodised

Flat angle cover for mounting on the Rapid 80 GA flat angle fitting.

Internal corner, trunking height 90 mm





Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-DI90210EL	—	Anodised	1	237.200	**6279643**
GA-DI90210RW	Pure white	—	1	237.200	**6279640**


Alu Aluminium

EL Anodised

Internal corner for changing the direction of the Rapid 80 GA aluminium device installation trunking.

T-piece, trunking height 90 mm





Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-DT90210EL	—	Anodised	1	177.400	**6279663**
GA-DT90210RW	Pure white	—	1	177.400	**6279660**


Alu Aluminium

EL Anodised

T-piece for branches of Rapid 80 GA aluminium device installation trunking.

End piece, trunking height 90 mm





Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
GA-E90210EL	—	Anodised	1	18.800	**6279673**
GA-E90210RW	Pure white	—	1	18.800	**6279670**


Alu Aluminium

EL Anodised

End piece for tidy closure of the Rapid 80 GA device installation trunking in aluminium.

Partition, trunking height 90 mm





Type	Length mm	Pack. m	Weight kg/100 m	Item No.
GA-TW90	2000	2	67.300	**6279714**

St Steel

Partition to divide the Rapid 80 GA and Rapid IBIS aluminium device installation trunking and ISS service poles for the installation of different voltage levels.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.




Gesamtkatalog_K1_UFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18


Service outlet, single, Modul 45®

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD8-2		1	5.900	6288569

PA Polyamide

Front locking single accessory mounting box for Modul 45 system, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.







Service outlet, double, Modul 45®

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD13		1	11.000	6288583

PA Polyamide

Front locking double accessory mounting box for Modul 45 system, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.







Service outlet, triple, Modul 45®

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD9-2		1	11.600	6288579

PA Polyamide

Front locking triple accessory mounting box for Modul 45 system, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.






Accessory mounting box for CEE installation 16 A/32 A

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GDCEE	—	1	13.700	6288635

PA Polyamide

Accessory mounting box for installation of a 5-pole CEE socket, 16 A or 32 A, with four-point fastening track 60 x 60 mm or 70 x 70 mm; with external strain relief for jacketed cables of up to Ø 18 mm; with eccentric lock for quick, screwless fastening.






Socket unit CEE, single, 16 A

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GDCEE16	Graphite black	1	31.100	6119483

PA Polyamide

Accessory mounting box for the installation of a 3 or 5-pole CEE socket, 16 A or 32 A.
Scope of delivery:
- 1 front-locking accessory mounting box for 4-point fastening track of 52 x 52 mm to 70 x 70 mm
- 1 cover frame in pure white for hiding the fastening technology
- 2 external strain reliefs for jacketed cables of up to Ø 18 mm
- 2 sash locks for optional fastening to trunking bases with C rail
- 1 CEE socket 16 A with mounting accessories






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Socket unit CEE, single, 32 A





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GDCEE32	Graphite black	1	37.200	**6119485**

PA Polyamide

Accessory mounting box for the installation of a 3 or 5-pole CEE socket, 16 A or 32 A.
Scope of delivery:
- 1 front-locking accessory mounting box for 4-point fastening track of 52 x 52 mm to 70 x 70 mm
- 1 cover frame in pure white for hiding the fastening technology
- 2 external strain reliefs for jacketed cables of up to Ø 18 mm
- 2 sash locks for optional fastening to trunking bases with C rail
- 1 CEE socket 32 A with mounting accessories

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18



Always indicate the item number when ordering.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Service pole, type ISSRM45

Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSRM45EL	—	Anodised	3300	1	510.000	**6290087**
ISSRM45RW	Pure white	—	3006	1	510.000	**6290086**

Alu Aluminium

EL Anodised




ISS aluminium service pole with a 45 mm system opening.
Set consists of:
1 one-compartment pole with clamping fastening
Total length: 3,315 - 3,480 mm
1 ceiling attachment with clamping device
1 aluminium cover
Length 3,000 mm
The design of this ISS service pole is based on an extremely slender, round aluminium profile, which has a smooth cover of the Rapid 45 device installation trunking series as its front side. The 45 mm system opening is suitable for direct acceptance of Modul 45 switch and connection devices.

Rubber support for ISSRM45

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSRGU	Black	1	1.450	**6290178**

GUM Rubber

Rubber support for slip-free fastening of the floor-ceiling service pole ISSRM45.






Ceiling panel for ISSRM45

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WAGRM45	Pure white	1	12.900	**6290264**

St Steel

Closed ceiling rosette for tidy closure of the ceiling gland of the service poles, type ISSRM45.







Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Service pole, type ISSRM45F



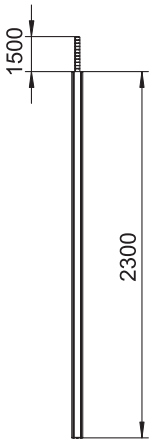

Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSRM45FRW	Pure white	—	2306	1	380.000	**6290095**
ISSRM45FEL	—	Anodised	2306	1	380.000	**6290097**


Alu Aluminium

EL Anodised

ISS aluminium service pole with a flexible hose to the ceiling and a 45 mm system opening.
Set consists of:
1 one-compartment pole with flexible hose to ceiling
Total length: 2,300 mm
1 flexible hose, length: 1,500 mm
1 aluminium cover
Length: 2,300 mm
The design of this ISS service pole is based on an extremely slender, round aluminium profile, which has a smooth cover of the Rapid 45 device installation trunking series as its front side. The 45 mm system opening is suitable for direct acceptance of Modul 45 switch and connection devices.
The floor plate as a stand, type SFISSF, and the hose connection to the ceiling, type SAISSF, should be ordered separately (see items below).

Floor-ceiling service poles, aluminium

Service pole, type ISSDM45



Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSDM45EL	—	Anodised	3009	1	1,172.000	**6289972**
ISSDM45RW	Pure white	—	3009	1	1,172.000	**6289970**

Alu Aluminium

EL Anodised

ISS aluminium service pole with a 45 mm system opening.
Set consists of:
1 two-compartment pole with clamping fastening
Total length: 3,315 - 3,480 mm
1 ceiling attachment with clamp
2 aluminium covers, length 3,000 mm
The clamp which is attached to the top of the ISS service pole can be variably adjusted from 300 to 500 mm. Possible colour options are aluminium anodised or pure white. The pole is based on a slender, oval aluminium profile. There are two 45 mm system openings on opposite sides for direct installation of Module 45 devices.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.

Rubber support for ISSDM45R

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSGUDM45	Black	1	4.600	**6290372**

GUM Rubber

Rubber support for slip-free fastening of the floor-ceiling service pole, type ISSDM45.






Ceiling panel for ISSDM45R

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WAGDM45	Pure white	1	46.800	**6290387**

St Steel

Ceiling rosette for tidy closure of the pole penetration, type ISSDM45, in the ceiling.




Floor plate for ISSDM45

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSBPDM45RW	Pure white	1	39.000	**6290347**
ISSBPDM45WA	White aluminium	1	39.000	**6290348**

St Steel

Floor plate with 30 mm visible edge and four fixing holes Ø 8.5 mm.




Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Service pole, type ISSDM45F



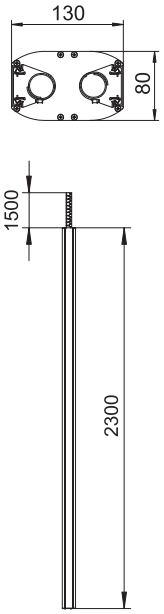

Type	Colour	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSDM45FRW	Pure white	—	2306	1	871.000	**6289974**
ISSDM45FEL	—	Anodised	2306	1	871.000	**6289976**

Alu Aluminium


EL Anodised

ISS aluminium service pole with a 45 mm system opening.
Set consists of:
1 two-compartment pole with two flexible hoses to the ceiling
Total length of the aluminium profile: 2,300 mm
2 aluminium covers, length 2,300 mm
Colour options are pure white or aluminium anodised. There are two 45 mm system openings on opposite sides for direct installation of Module 45 devices. The floor plate as a stand, type SFISSF, and the hose connection to the ceiling, type SAISSF, should be ordered separately (see articles below).

Aluminium floor service poles

Service pole, type ISSDHSM45





Type	Colour	Surface finish	Pack. pcs	Weight kg/100 pcs.	Item No.
ISSDHSM45RW	Pure white	—	1	281.500	**6289980**
ISSDHSM45EL	—	Anodised	1	281.500	**6289982**

Alu Aluminium

EL Anodised


ISS service pole made from aluminium with 45 mm system opening for the direct installation of Modul 45 switchingand connection devices.
Pole consists of:
1 two-compartment pole with stand
Total length 670 mm
2 aluminium covers
Length 670 mm
The design of this service pole is based on an extremely narrow, oval aluminium profile which shows on both narrow sides of the oval a cover of the Rapid 45 device installation trunking series. The 45 mm system opening is suitable for direct acceptance of Modul 45 switch and connection devices. The installation area is theoretically sufficient for 2 x 14 Modul 45 devices. If Modul 45 connect is used or in the case of cabling requiring a lot of space, the number of the max. installable devices is reduced. There is the option to install a partition, type 2371/40 (6023096).

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Perfect connection to the building and the electrical infrastructure

Service poles for industrial applications

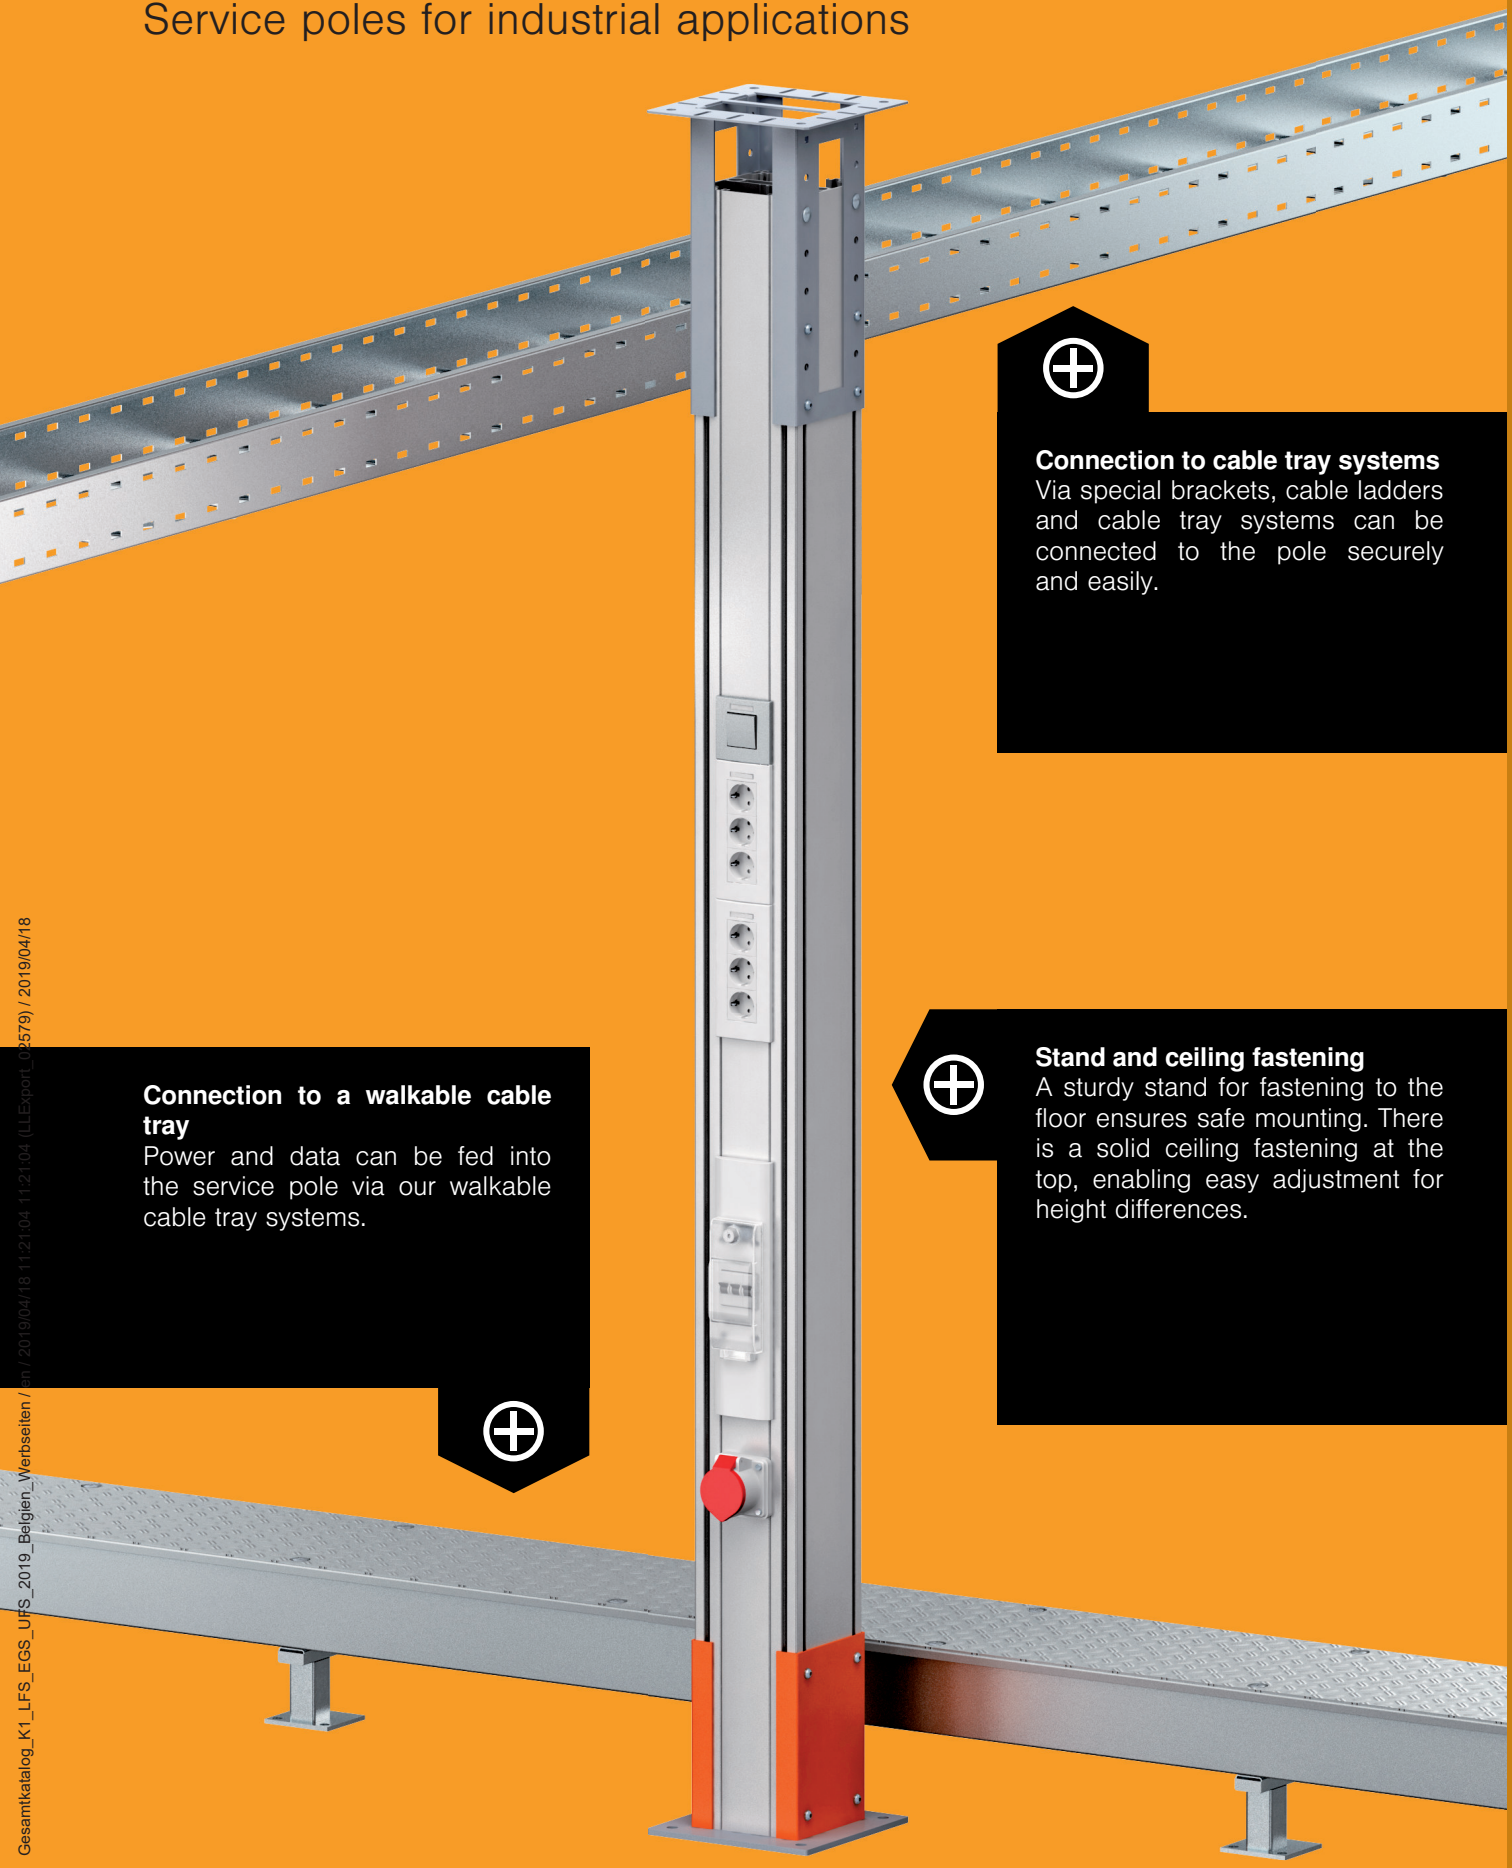

Connection to cable tray systems
Via special brackets, cable ladders and cable tray systems can be connected to the pole securely and easily.

Stand and ceiling fastening
A sturdy stand for fastening to the floor ensures safe mounting. There is a solid ceiling fastening at the top, enabling easy adjustment for height differences.


Connection to a walkable cable tray
Power and data can be fed into the service pole via our walkable cable tray systems.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Industrial pole profile, type ISS160160IP4





Type	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ISS160160IP4 EL	Anodised	4130	1	4,055.000	**6290404**


Alu Aluminium

EL Anodised

ISS service pole for the equipment of assembly workstations in production sites. The anodised heavy-duty aluminium profile has a 76.5 mm system opening on two opposite sides for accepting front-locking mounting accessory boxes of the series 71GD or mounting supports of the series 71MT. All four sides of the profile have a mounting groove in the standard nominal size 8 for installing various expansion parts for additional functions (Building Kit Systems). The scope of delivery comprises the pole profile as well as the necessary covers for the system openings in 2,000 mm lengths and a PE bag with 20 additional locking brackets, type RKV3V, to enable you to create partial lengths of the covers. Two closed trunking channels inside the profile are ideal for conduction of compressed air.

Cover





Type	Colour	Surface finish	Length mm	Pack. m	Weight kg/100 m	Item No.
GA-OTEL	–	Anodised	2000	2	38.300	**6279723**

Alu Aluminium

EL Anodised

Aluminium cover, for closing Rapid GA device installation trunking and ISS service poles with a 76.5 mm system opening. The firm position of the cover and electrical contact to the lower part of the trunking and service pole is guaranteed thanks to type RKV3V locking brackets. There are 6 pre-mounted locking brackets included per delivery length (2,000 mm).

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18


Industrial service pole, type ISS160160IP6

Type	Surface finish	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ISS160160IP6 EL	Anodised	6130	1	6,020.000	**6290406**

Alu Aluminium

EL Anodised

ISS service pole for the equipment of assembly workstations in production sites. The anodised heavy-duty aluminium profile has a 76.5 mm system opening on two opposite sides for accepting front-locking mounting accessory boxes of the series 71GD or mounting supports of the series 71MT. All four sides of the profile have a mounting groove in the standard nominal size 8 for installing various expansion parts for additional functions (Building Kit Systems). The scope of delivery comprises the pole profile as well as the necessary covers for the system openings in 2,000 mm lengths and a PE bag with 20 additional locking brackets, type RKV3V, to enable you to create partial lengths of the covers. Two closed trunking channels inside the profile are ideal for conduction of compressed air.







Ceiling fastening for service poles

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ISS160160DB WA	White aluminium	403	1	443.600	**6290436**

St Steel

Ceiling fastening for fixing the ISS service pole to the ceiling. The scope of delivery comprises of two U-shaped profiles made from 3 mm sheet steel, the fastening plate for the ceiling and the required installation accessories, including the groove rail. The ceiling fastening can be height-adjusted on the pole profile.







Floor plate for industrial pole

Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ISS160160BP	White aluminium	250	1	382.000	**6290416**

St Steel

Plate to fasten the ISS industrial pole to the floor. The scope of delivery comprises of four fastening screws to mount the floor plate onto the pole profile and two sealing plugs to make the compressed air channels airtight.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Collision guard for industrial pole







Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ISS160160AS WA	White aluminium	250	1	264.000	**6290422**

St Steel

Collision guard as mechanical protection of the ISS industrial pole in the bottom area. The scope of delivery comprises of two U-shaped protection profiles made from 3 mm sheet steel and eight fastening screws with slot nuts to install on the pole profile.

Collision guard for industrial pole






Type	Colour	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ISS160160AS HRO	Bright red orange	250	1	264.000	**6290423**

St Steel

Collision guard as mechanical protection of the ISS industrial pole in the bottom area. The scope of delivery comprises of two U-shaped protection profiles made from 3 mm sheet steel and eight fastening screws with slot nuts to install on the pole profile.

Compressed air tap for industrial pole






Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ISS160160DLA	1	30.000	**6290495**

Tap to take off compressed air from the ISS industrial pole profile. The compressed air tap has a G 1/2 (ISO 228-1) threaded hole to accept a standard compressed air coupling. The unit can be mounted onto the pole profile using slot nuts and fastening screws. For the creation of an appropriate outlet for the compressed air a drilling template is supplied.

Partition






Type	Length mm	Pack. m	Weight kg/100 m	Item No.
GK-TW70	2000	40	17.400	**6274900**

PVC Polyvinylchloride

Partition for mounting in Rapid 80 GK, GA and Rapid IBIS device installation trunking or ISS service poles for installing cables of different voltage levels.

Adapter plate for bracket mounting





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ISS160160APKTS	White aluminium	1	142.000	**6290456**


St Steel

Adapter plate for mounting of a bracket for a cable support system to the ISS industrial service pole. Mounting instructions are included. Please observe the maximum load values. The bracket was tested with the adapter plate on the pole profile. The installation engineer must choose the ideal fastening system to match the substrate.

Floor-ceiling service pole accessories

Service outlet, single, Modul 45®





Type	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD8-2	1	5.900	**6288569**

PA Polyamide

Front locking single accessory mounting box for Modul 45 system, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.


Service outlet, double, Modul 45®

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD13	1	11.000	**6288583**

PA Polyamide

Front locking double accessory mounting box for Modul 45 system, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.







Service outlet, triple, Modul 45®

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD9-2	1	11.600	**6288579**

PA Polyamide

Front locking triple accessory mounting box for Modul 45 system, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.





Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.



Always indicate the item number when ordering.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/0[illegible]18 11:21:04 (LLExport_02579) / 2019/04/18

Service outlet, single, Modul 45®

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD8-2	1	5.900	**6288569**

PA Polyamide

Front locking single accessory mounting box for Modul 45 system, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.






Cover frame AR45, single

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
AR45-F1 RW	Pure white	1	1.600	**6119322**
AR45-F1 SWGR	Black-grey	1	1.600	**6119324**
AR45-F1 AL	Aluminium painted	1	1.600	**6119326**

PC Polycarbonate

Front locking cover frame for Modul 45 devices, single, without labelling panel for horizontal and vertical device installation, for locking in accessory mounting box 71GD8-2.




Cover frame AR45, single, with labelling panel for horizontal device installation

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
AR45-BF1 RW	Pure white	1	1.500	**6119332**
AR45-BF1 SWGR	Black-grey	1	1.500	**6119334**
AR45-BF1 AL	Aluminium painted	1	1.500	**6119336**

PC Polycarbonate

Front locking cover frame for Modul 45 devices, single, with labelling panel for horizontal device installation, for locking in accessory mounting box 71GD8-2.




Cover frame AR45, single, with labelling panel for vertical device installation

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
AR45-BSF1 RW	Pure white	1	1.500	**6119338**
AR45-BSF1 SWGR	Black-grey	1	1.500	**6119339**
AR45-BSF1 AL	Aluminium painted	1	1.500	**6119340**

PC Polycarbonate

Front locking cover frame for Modul 45 devices, single, with labelling panel for vertical device installation, for locking in accessory mounting box 71GD8-2.





Service outlet, double, Modul 45®

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD13	1	11.000	**6288583**

PA Polyamide

Front locking double accessory mounting box for Modul 45 system, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Modul 45®, device installation solution, double

Cover frame AR45, double




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
AR45-F2 RW	Pure white	1	2.320	**6119342**
AR45-F2 SWGR	Black-grey	1	2.320	**6119344**
AR45-F2 AL	Aluminium painted	1	2.320	**6119346**

PC Polycarbonate

Front locking cover frame for Modul 45 devices, single, without labelling panel for horizontal and vertical device installation, for locking in accessory mounting box 71GD13 or in mounting support 71MT2 45.

Cover frame AR45, double, with labelling panel for horizontal device installation




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
AR45-BF2 RW	Pure white	1	2.260	**6119352**
AR45-BF2 SWGR	Black-grey	1	2.260	**6119354**
AR45-BF2 AL	Aluminium painted	1	2.260	**6119356**

PC Polycarbonate

Front locking cover frame for Modul 45 devices, double, with labelling panel for horizontal device installation, for locking in accessory mounting box 71GD13 or in mounting support 71MT2 45.

Cover frame AR45, double, with labelling panel for vertical device installation




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
AR45-BSF2 RW	Pure white	1	2.260	**6119362**
AR45-BSF2 SWGR	Black-grey	1	2.260	**6119364**
AR45-BSF2 AL	Aluminium painted	1	2.260	**6119366**


PC Polycarbonate

Front locking cover frame for Modul 45 devices, double, with labelling panel for vertical device installation, for locking in accessory mounting box 71GD13 or in mounting support 71MT2 45.

Modul 45®, device installation solution, triple

Service outlet, triple, Modul 45®






Type	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD9-2	1	11.600	**6288579**

PA Polyamide

Front locking triple accessory mounting box for Modul 45 system, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.

Cover frame AR45, triple



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
AR45-F3 RW	Pure white	1	2.800	**6119372**
AR45-F3 SWGR	Black-grey	1	2.800	**6119374**
AR45-F3 AL	Aluminium painted	1	2.800	**6119376**

PC Polycarbonate

Front locking cover frame for Modul 45 devices, triple, without labelling panel for horizontal and vertical device installation, for locking in accessory mounting box 71GD9-2 or in mounting support 71MT3 45-2.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.

Cover frame AR45, triple, with labelling panel for horizontal device installation

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
AR45-BF3 RW	Pure white	1	2.800	**6119382**
AR45-BF3 SWGR	Black-grey	1	2.800	**6119384**
AR45-BF3 AL	Aluminium painted	1	2.800	**6119386**

PC Polycarbonate

Front locking cover frame for Modul 45 devices, triple, with labelling panel for horizontal device installation, for locking in accessory mounting box 71GD9-2 or in mounting support 71MT3 45-2.




Cover frame AR45, triple, with labelling panel for vertical device installation

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
AR45-BSF3 RW	Pure white	1	2.800	**6119387**
AR45-BSF3 SWGR	Black-grey	1	2.800	**6119388**
AR45-BSF3 AL	Aluminium painted	1	2.800	**6119389**

PC Polycarbonate

Front locking cover frame for Modul 45 devices, triple, with labelling panel for vertical device installation, for locking in accessory mounting box 71GD9-2 or in mounting support 71MT3 45-2.




One-way/changeover switch, 1/2 module

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WS-UB RW0.5	Pure white	1	1.800	**6120920**
WS-UB SWGR0.5	Black-grey	1	1.800	**6120922**
WS-UB AL0.5	Aluminium painted	1	1.800	**6120924**

PC Polycarbonate

Changeover switch 1-pin, 10 A, 250 V~, with screwless terminals.






One-way/changeover switch with warning lamp, 1/2 module

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WS-UKL RW0.5	Pure white	1	1.800	**6120926**
WS-UKL SWGR0.5	Black-grey	1	1.800	**6120928**
WS-UKL AL0.5	Aluminium painted	1	1.800	**6120930**

PC Polycarbonate

Changeover switch with LED element as control luminaire, 1-pole, 10 A, 250 V~, with screwless terminals.






One-way/changeover switch, 1 module

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WS-UB RW1	Pure white	1	2.600	**6120932**
WS-UB SWGR1	Black-grey	1	2.600	**6120934**
WS-UB AL1	Aluminium painted	1	2.300	**6120936**

PC Polycarbonate

Changeover switch 1-pin, 10 A, 250 V~, with screwless terminals.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

One-way/changeover switch with warning lamp, 1 module






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WS-UKL RW1	Pure white	1	2.300	6120938
WS-UKL SWGR1	Black-grey	1	2.300	6120940
WS-UKL AL1	Aluminium painted	1	2.300	6120942

PC Polycarbonate

Changeover switch with LED element as control luminaire, 1-pole, 10 A, 250 V~, with screwless terminals.

Roller blind switch, 1 module






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
RS-BS RW1	Pure white	1	3.700	6120950
RS-BS SWGR1	Black-grey	1	3.700	6120952
RS-BS AL1	Aluminium painted	1	3.700	6120954

PC Polycarbonate

Roller blind switch with electrical and mechanical lock, 1-pin, 10 A, 250 V~, with screwless terminals.

Changeover switch, 1/2 module






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
TA-WB RW0.5	Pure white	1	1.800	6120960
TA-WB SWGR0.5	Black-grey	1	1.800	6120962
TA-WB AL0.5	Aluminium painted	1	1.800	6120964

PC Polycarbonate

Changeover switch, 1-pin, 10 A, 250 V~, with screwless terminals.

Changeover switch, 1 module






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
TA-WB RW1	Pure white	1	3.300	6120966
TA-WB SWGR1	Black-grey	1	3.300	6120968
TA-WB AL1	Aluminium painted	1	3.300	6120970

PC Polycarbonate

Changeover switch, 1-pin, 10 A , 250 V~, with screwless terminals.

Roller blind button, 1 module







Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
RT-BS RW1	Pure white	1	3.700	6120980
RT-BS SWGR1	Black-grey	1	3.700	6120982
RT-BS AL1	Aluminium painted	1	3.700	6120984

PC Polycarbonate

Roller blind button with electrical locking, 1-pin, 10 A, 250 V~, with screwless terminals.

Adapter for switch installation rotated through 90°





Type	Pack. pcs	Weight kg/100 pcs.	Item No.
AD-90G M45-1	1	2.200	6120992

St Steel

The adapter allows switch installation rotated through 90° in, for example, service poles with a 45 mm track or Rapid 45. Suitable for all switches and buttons in one module width (45 x 45 mm).

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.

Data technology support, 1 module, straight outlet, type RM

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTG-2RM RW1	Pure white	1	1.100	**6119292**
DTG-2RM SWGR1	Black-grey	1	1.100	**6119294**
DTG-2RM AL1	Aluminium painted	1	1.100	**6119296**

PC Polycarbonate

Data technology support with straight outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type RM has a special module seat and is designed for indirect fastening of the data connection modules in the mounting opening.






Data technology support, 1 module, straight outlet, type C

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTG-2C RW1	Pure white	1	1.100	**6119214**
DTG-2C SWGR1	Black-grey	1	1.100	**6119216**
DTG-2C AL1	Aluminium painted	1	1.100	**6119218**

PC Polycarbonate

Data technology support with straight outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type C has a mounting opening of 19.30 x 14.80 mm and is designed for direct fastening of the data connection modules in the mounting opening.






Data technology support, 1 module, slanting outlet, type RM

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTS-2RM RW1	Pure white	1	2.900	**6119298**
DTS-2RM SWGR1	Black-grey	1	2.900	**6119300**
DTS-2RM AL1	Aluminium painted	1	2.900	**6119302**

PC Polycarbonate

Data technology support with slanting outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type RM has a special module seat and is designed for indirect fastening of the data connection modules in the mounting opening.







Data technology support, 1 module, slanting outlet, type C

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTS-2C RW1	Pure white	1	1.500	**6119250**
DTS-2C SWGR1	Black-grey	1	1.500	**6119252**
DTS-2C AL1	Aluminium painted	1	1.500	**6119254**

PC Polycarbonate

Data technology support with slanting outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type C has a mounting opening of 19.30 x 14.80 mm and is designed for direct fastening of the data connection modules in the mounting opening.








Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

RJ45 data connection module, Cat. 5e, unshielded






Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ASM-C5	1	1.120	**6117337**

Connection module Cat. 5e unshielded, with a RJ 45 slot. Including a dust cover, a cable tie and mounting instructions. Suitable for installation in data technology supports of type DTG-2RM and DTS-2RM.

RJ45 data connection module, Cat. 5e, shielded






Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ASM-C5 G	1	2.660	**6117325**

Connection module Cat. 5e shielded, with a RJ 45 slot. Includes an EMC screen hood, a dust cover, a cable tie and mounting instructions. Suitable for installation in data technology supports of type DTG-2RM and DTS-2RM.

RJ45 data connection module, Cat. 6, unshielded






Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ASM-C6	1	1.060	**6117341**

Connection module Cat. 6 unshielded, with a RJ 45 slot. Including a dust cover, a cable tie and mounting instructions. Suitable for installation in data technology supports of type DTG-2RM and DTS-2RM.

RJ45 data connection module, Cat. 6, shielded






Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ASM-C6 G	1	1.850	**6117329**

Connection module Cat. 6 shielded, with a RJ 45 slot. Includes an EMC screen hood, a dust cover, a cable tie and mounting instructions. Suitable for installation in data technology supports of type DTG-2RM and DTS-2RM.

Connection module Cat. 6A, unshielded, snap-in






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ASM-C6A	Grey	1	1.050	**6117348**

Connection module Cat. 6A (ISO) unshielded, with an RJ45 slot. Including a dust cover, a cable tie, a Keystone fastening frame and mounting instructions. Suitable for installation in the data technology supports of type DTG-2C and DTS-2C, support plate of type MTM 2C and MTM 3C, mounting plate of type MPR2 2C, mounting supports of type MTGE2 2C, MTGE2 15 2C and MTGE2 F 2C.

Connection module Cat. 6A, shielded, snap-in





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ASM-C6A G	Grey	1	1.630	**6117346**

Connection module Cat. 6A (ISO) shielded, with an RJ45 slot. Including an EMC screen hood, a dust cover, a cable tie, a Keystone fastening frame and mounting instructions. Suitable for installation in the data technology supports of type DTG-2C and DTS-2C, support plate of type MTM 2C and MTM 3C, mounting plate of type MPR2 2C, mounting supports of type MTGE2 2C, MTGE2 15 2C and MTGE2 F 2C.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.

Data technology support, 1 module, straight outlet, type A

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTG-2A RW1	Pure white	1	1.100	6119202
DTG-2A SWGR1	Black-grey	1	1.100	6119204
DTG-2A AL1	Aluminium painted	1	1.100	6119206

PC Polycarbonate

Data technology support with straight outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type A has a mounting opening of 20.10 x 14.80 mm and is designed for direct fastening of the data connection modules in the mounting opening.






Data technology support, 1 module, slanting outlet, type A

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTS-2A RW1	Pure white	1	2.000	6119238
DTS-2A SWGR1	Black-grey	1	1.500	6119240
DTS-2A AL1	Aluminium painted	1	1.500	6119242

PC Polycarbonate

Data technology support with slanting outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type A has a mounting opening of 20.10 x 14.80 mm and is designed for direct fastening of the data connection modules in the mounting opening.

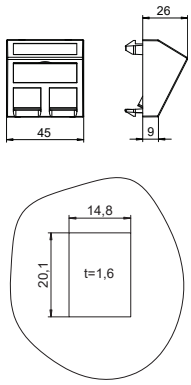




Data technology support, 1 module, straight outlet, type B

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTG-2B RW1	Pure white	1	1.100	6119208
DTG-2B SWGR1	Black-grey	1	1.100	6119210
DTG-2B AL1	Aluminium painted	1	1.100	6119212

PC Polycarbonate

Data technology support with straight outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type B has a mounting opening of 19.35/21.55 x 14.85 mm and is designed for direct fastening of the data connection modules in the mounting opening.

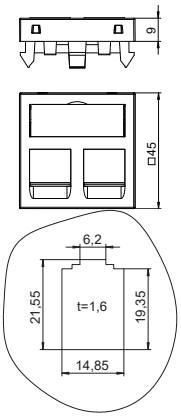




Data technology support, 1 module, slanting outlet, type B

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTS-2B RW1	Pure white	1	1.500	6119244
DTS-2B SWGR1	Black-grey	1	1.500	6119246
DTS-2B AL1	Aluminium painted	1	1.500	6119248

PC Polycarbonate

Data technology support with slanting outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type B has a mounting opening of 19.35/21.55 x 14.85 mm and is designed for direct fastening of the data connection modules in the mounting opening.

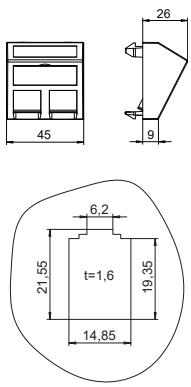




Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Data technology support, 1 module, straight outlet, type C






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTG-2C RW1	Pure white	1	1.100	**6119214**
DTG-2C SWGR1	Black-grey	1	1.100	**6119216**
DTG-2C AL1	Aluminium painted	1	1.100	**6119218**

PC Polycarbonate

Data technology support with straight outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type C has a mounting opening of 19.30 x 14.80 mm and is designed for direct fastening of the data connection modules in the mounting opening.

Data technology support, 1 module, slanting outlet, type C



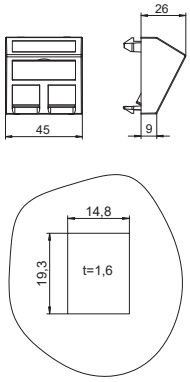


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTS-2C RW1	Pure white	1	1.500	**6119250**
DTS-2C SWGR1	Black-grey	1	1.500	**6119252**
DTS-2C AL1	Aluminium painted	1	1.500	**6119254**

PC Polycarbonate

Data technology support with slanting outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type C has a mounting opening of 19.30 x 14.80 mm and is designed for direct fastening of the data connection modules in the mounting opening.

Data technology support, 1 module, straight outlet, type C, without dust protection slider



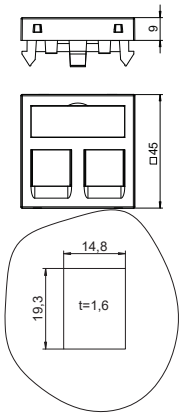

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTG-02C RW1	Pure white	1	1.000	**6119280**
DTG-02C SWGR1	Black-grey	1	1.000	**6119282**
DTG-02C AL1	Aluminium painted	1	1.000	**6119284**

PC Polycarbonate

Data technology support with straight outlet and without a locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type C has a mounting opening of 19.30 x 14.80 mm and is designed for direct fastening of the data connection modules in the mounting opening.

Always indicate the item number when ordering.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Data technology support, 1 module, slanting outlet, type C, without dust protection slider

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTS-02C RW1	Pure white	1	1.400	**6119286**
DTS-02C SWGR1	Black-grey	1	1.400	**6119288**
DTS-02C AL1	Aluminium painted	1	1.400	**6119290**

PC Polycarbonate

Data technology support with slanting outlet and without a locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type C has a mounting opening of 19.30 x 14.80 mm and is designed for direct fastening of the data connection modules in the mounting opening.






Data technology support, 1 module, straight outlet, type EP

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTG-2EP RW1	Pure white	1	1.100	**6119232**
DTG-2EP SWGR1	Black-grey	1	1.100	**6119234**
DTG-2EP AL1	Aluminium painted	1	1.100	**6119236**

PC Polycarbonate

Data technology support with straight outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type EP has a special module seat and is designed for indirect fastening of the data connection modules in the mounting opening.






Data technology support, 1 module, slanting outlet, type EP

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTS-2EP RW1	Pure white	1	1.500	**6119268**
DTS-2EP SWGR1	Black-grey	1	1.500	**6119270**
DTS-2EP AL1	Aluminium painted	1	1.500	**6119272**

PC Polycarbonate

Data technology support with slanting outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type EP has a special module seat and is designed for indirect fastening of the data connection modules in the mounting opening.






Data technology support, 1 module, straight outlet, type F

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTG-2F RW1	Pure white	1	1.100	**6119220**
DTG-2F SWGR1	Black-grey	1	1.100	**6119222**
DTG-2F AL1	Aluminium painted	1	1.100	**6119224**

PC Polycarbonate

Data technology support with straight outlet and locking slider to accept two data technology connection modules. The locking fastening is suitable for horizontal and vertical installation in the system environment.






Data technology support, 1 module, slanting outlet, type F

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTS-2F RW1	Pure white	1	1.500	**6119256**
DTS-2F SWGR1	Black-grey	1	1.500	**6119258**
DTS-2F AL1	Aluminium painted	1	1.500	**6119260**

PC Polycarbonate

Data technology support with slanting outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type F has a special module seat and is designed for indirect fastening of the data connection modules in the mounting opening.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Data technology support, 1 module, straight outlet, type PA






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTG-2PA RW1	Pure white	1	1.100	**6119226**
DTG-2PA SWGR1	Black-grey	1	1.100	**6119228**
DTG-2PA AL1	Aluminium painted	1	1.100	**6119230**

PC Polycarbonate

Data technology support with straight outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type PA has a special module seat and is designed for indirect fastening of the data connection modules in the mounting opening.

Data technology support, 1 module, slanting outlet, type PA






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTS-2PA RW1	Pure white	1	1.500	**6119262**
DTS-2PA SWGR1	Black-grey	1	1.500	**6119264**
DTS-2PA AL1	Aluminium painted	1	1.500	**6119266**

PC Polycarbonate

Data technology support with slanting outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type PA has a special module seat and is designed for indirect fastening of the data connection modules in the mounting opening.

Data technology support, 1 module, straight outlet, type RM






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTG-2RM RW1	Pure white	1	1.100	**6119292**
DTG-2RM SWGR1	Black-grey	1	1.100	**6119294**
DTG-2RM AL1	Aluminium painted	1	1.100	**6119296**

PC Polycarbonate

Data technology support with straight outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type RM has a special module seat and is designed for indirect fastening of the data connection modules in the mounting opening.

Data technology support, 1 module, slanting outlet, type RM






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTS-2RM RW1	Pure white	1	2.900	**6119298**
DTS-2RM SWGR1	Black-grey	1	2.900	**6119300**
DTS-2RM AL1	Aluminium painted	1	2.900	**6119302**

PC Polycarbonate

Data technology support with slanting outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type RM has a special module seat and is designed for indirect fastening of the data connection modules in the mounting opening.

Data technology support, 1 module, straight outlet, type LE





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTG-02LE RW1	Pure white	1	0.900	**6119304**
DTG-02LE SWGR1	Black-grey	1	0.900	**6119306**
DTG-02LE AL1	Aluminium painted	1	0.900	**6119308**

PC Polycarbonate

Data technology support with straight outlet and without a locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type LE has a special module seat and is designed for indirect fastening of the data connection modules in the mounting opening.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.

D-Sub9 connection, 1 module, straight outlet, as screw connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-DB9 S RW1	Pure white	1	2.400	**6104634**
MTG-DB9 S SWGR1	Black-grey	1	2.400	**6104637**
MTG-DB9 S AL1	Aluminium painted	1	2.400	**6104640**

PC Polycarbonate

Multimedia support with one D-Sub9 connection socket, straight cable outlet, with labelling panel, D-Sub9 socket (RS232) with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






D-Sub9 connection, 1 module, slanting outlet, as screw connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-DB9 S RW1	Pure white	1	2.600	**6104646**
MTS-DB9 S SWGR1	Black-grey	1	2.600	**6104649**
MTS-DB9 S AL1	Aluminium painted	1	2.600	**6104652**

PC Polycarbonate

Multimedia support with one D-Sub9 connection socket, slanting cable outlet, with labelling panel, D-Sub9 socket (RS232) with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






D-Sub9 connection, 1 module, straight outlet, with connection cable

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-DB9 F RW1	Pure white	1	5.200	**6104682**
MTG-DB9 F SWGR1	Black-grey	1	5.200	**6104685**
MTG-DB9 F AL1	Aluminium painted	1	5.200	**6104688**

PC Polycarbonate

Multimedia support with one D-Sub9 connection socket, straight cable outlet, with labelling panel, short D-Sub9 connection cable (RS232), socket-socket version. Support with locking fastening, suitable for horizontal and vertical installation in the system environment.






D-Sub9 connection, 1 module, slanting outlet, with connection cable

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-DB9 F RW1	Pure white	1	5.400	**6104694**
MTS-DB9 F SWGR1	Black-grey	1	5.400	**6104697**
MTS-DB9 F AL1	Aluminium painted	1	5.400	**6104700**

PC Polycarbonate

Multimedia support with one D-Sub9 connection socket, slanting cable outlet, with labelling panel, short D-Sub9 connection cable (RS232), socket-socket version. Support with locking fastening, suitable for horizontal and vertical installation in the system environment.






USB 2.0 / 3.0 connection, 1 module, straight outlet, as screw connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-U3A S RW1	Pure white	1	2.500	**6104874**
MTG-U3A S SWGR1	Black-grey	1	2.500	**6104877**
MTG-U3A S AL1	Aluminium painted	1	2.500	**6104880**

PC Polycarbonate

Multimedia support with one USB 3.0 connection socket, straight cable outlet, with labelling panel, USB 3.0 Type A socket with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

USB 2.0 / 3.0 connection, 1 module, slanting outlet, as screw connection






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-U3A S RW1	Pure white	1	2.700	**6104886**
MTS-U3A S SWGR1	Black-grey	1	2.700	**6104889**
MTS-U3A S AL1	Aluminium painted	1	2.700	**6104892**

PC Polycarbonate

Multimedia support with one USB 3.0 connection socket, slanting cable outlet, with labelling panel, USB 3.0 type A socket with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

USB 2.0 / 3.0 connection, 1 module, straight outlet, with connection cable






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-U3A F RW1	Pure white	1	6.000	**6104922**
MTG-U3A F SWGR1	Black-grey	1	6.000	**6104925**
MTG-U3A F AL1	Aluminium painted	1	6.000	**6104928**

PC Polycarbonate

Multimedia support with one USB 3.0 connection socket, straight cable outlet, with labelling panel, short USB 3.0 type A connection cable, socket-socket version. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

USB 2.0 / 3.0 connection, 1 module, slanting outlet, with connection cable






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-U3A F RW1	Pure white	1	6.200	**6104934**
MTS-U3A F SWGR1	Black-grey	1	6.200	**6104937**
MTS-U3A F AL1	Aluminium painted	1	6.200	**6104940**

PC Polycarbonate

Multimedia support with one USB 3.0 connection socket, slanting cable outlet, with labelling panel, short USB 3.0 type A connection cable, socket-socket version. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

VGA connection, 1 module, straight outlet, as screw connection






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-VGA S RW1	Pure white	1	2.400	**6104610**
MTG-VGA S SWGR1	Black-grey	1	2.400	**6104613**
MTG-VGA S AL1	Aluminium painted	1	2.400	**6104616**

PC Polycarbonate

Multimedia support with one VGA connection socket, straight cable outlet, with labelling panel, VGA socket (HD15) with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

VGA connection, 1 module, slanting outlet, as screw connection





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-VGA S RW1	Pure white	1	2.600	**6104622**
MTS-VGA S SWGR1	Black-grey	1	2.600	**6104625**
MTS-VGA S AL1	Aluminium painted	1	2.600	**6104628**

PC Polycarbonate

Multimedia support with one VGA connection socket, slanting cable outlet, with labelling panel, VGA socket (HD15) with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Always indicate the item number when ordering.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

VGA connection, 1 module, straight outlet, with connection cable

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-VGA F RW1	Pure white	1	5.200	**6104658**
MTG-VGA F SWGR1	Black-grey	1	5.200	**6104661**
MTG-VGA F AL1	Aluminium painted	1	5.200	**6104664**

PC Polycarbonate

Multimedia support with one VGA connection socket, straight cable outlet, with labelling panel, short VGA connection cable (HD15), socket-socket version. Support with locking fastening, suitable for horizontal and vertical installation in the system environment.






VGA connection, 1 module, slanting outlet, with connection cable

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-VGA F RW1	Pure white	1	5.400	**6104670**
MTS-VGA F SWGR1	Black-grey	1	5.400	**6104673**
MTS-VGA F AL1	Aluminium painted	1	5.400	**6104676**

PC Polycarbonate

Multimedia support with one VGA connection socket, slanting cable outlet, with labelling panel, short VGA connection cable (HD15), socket-socket version. Support with locking fastening, suitable for horizontal and vertical installation in the system environment.






Mini jack connection, 1 module, straight outlet, as soldered connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-MK L RW1	Pure white	1	1.500	**6104946**
MTG-MK L SWGR1	Black-grey	1	1.500	**6104949**
MTG-MK L AL1	Aluminium painted	1	1.500	**6104952**

PC Polycarbonate

Multimedia support with one mini jack connection socket, straight cable outlet, with labelling panel, mini cinch socket (TRS 3.5 mm) with soldered connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






Mini jack connection, 1 module, slanting outlet, as soldered connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-MK L RW1	Pure white	1	1.700	**6104958**
MTS-MK L SWGR1	Black-grey	1	1.700	**6104961**
MTS-MK L AL1	Aluminium painted	1	1.700	**6104964**

PC Polycarbonate

Multimedia support with one mini jack connection socket, slanting cable outlet, with labelling panel, mini cinch socket (TRS 3.5 mm) with soldered connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






Video cinch connection, 1 module, straight outlet, as soldered connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-R L RW1	Pure white	1	1.500	**6104970**
MTG-R L SWGR1	Black-grey	1	1.500	**6104973**
MTG-R L AL1	Aluminium painted	1	1.500	**6104976**

PC Polycarbonate

Multimedia support with one cinch connection socket for composite video, straight cable outlet, with labelling panel, cinch socket (RCA) with soldered connection, colour coding yellow. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Video cinch connection, 1 module, slanting outlet, as soldered connection






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-R L RW1	Pure white	1	1.700	**6104982**
MTS-R L SWGR1	Black-grey	1	1.700	**6104985**
MTS-R L AL1	Aluminium painted	1	1.700	**6104988**

PC Polycarbonate

Multimedia support with one cinch connection socket for composite video, slanting cable outlet, with labelling panel, cinch socket (RCA) with soldered connection, colour coding yellow. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Video cinch connection, 1 module, straight outlet, as 1:1 coupling






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-R F RW1	Pure white	1	1.500	**6104994**
MTG-R F SWGR1	Black-grey	1	1.500	**6104997**
MTG-R F AL1	Aluminium painted	1	1.500	**6105000**

PC Polycarbonate

Multimedia support with one cinch connection socket for composite video, straight cable outlet, with labelling panel, cinch coupling (RCA), socket-socket version, colour coding yellow. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Video cinch connection, 1 module, slanting outlet, as 1:1 coupling






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-R F RW1	Pure white	1	1.700	**6105006**
MTS-R F SWGR1	Black-grey	1	1.700	**6105009**
MTS-R F AL1	Aluminium painted	1	1.700	**6105012**

PC Polycarbonate

Multimedia support with one cinch connection socket for composite video, slanting cable outlet, with labelling panel, cinch coupling (RCA), socket-socket version, colour coding yellow. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Audio cinch connection, 1 module, straight outlet, as soldered connection






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-2R L RW1	Pure white	1	2.500	**6105042**
MTG-2R L SWGR1	Black-grey	1	2.500	**6105045**
MTG-2R L AL1	Aluminium painted	1	2.500	**6105048**

PC Polycarbonate

Multimedia support with two cinch connection sockets for audio R/L, straight cable outlet, with labelling panel, two cinch sockets (RCA) with soldered connection, colour coding red/white. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Audio cinch connection, 1 module, slanting outlet, as soldered connection





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-2R L RW1	Pure white	1	2.700	**6105054**
MTS-2R L SWGR1	Black-grey	1	2.700	**6105057**
MTS-2R L AL1	Aluminium painted	1	2.700	**6105060**

PC Polycarbonate

Multimedia support with two cinch connection sockets for audio R/L, slanting cable outlet, with labelling panel, two cinch sockets (RCA) with soldered connection, colour coding red/white. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Always indicate the item number when ordering.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Audio cinch connection, 1 module, straight outlet, as 1:1 coupling

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-2R F RW1	Pure white	1	2.500	**6105066**
MTG-2R F SWGR1	Black-grey	1	2.500	**6105069**
MTG-2R F AL1	Aluminium painted	1	2.500	**6105072**

PC Polycarbonate

Multimedia support with two cinch connection sockets for audio R/L, straight cable outlet, with labelling panel, two cinch couplings (RCA), socket-socket version, colour coding red/white. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






Audio cinch connection, 1 module, slanting outlet, as 1:1 coupling

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-2R F RW1	Pure white	1	2.700	**6105078**
MTS-2R F SWGR1	Black-grey	1	2.700	**6105081**
MTS-2R F AL1	Aluminium painted	1	2.700	**6105084**

PC Polycarbonate

Multimedia support with two cinch connection sockets for audio R/L, slanting cable outlet, with labelling panel, two cinch couplings (RCA), socket-socket version, colour coding red/white. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






Component video connection, 1 module, straight outlet, as soldered connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-3R L RW1	Pure white	1	3.200	**6105114**
MTG-3R L SWGR1	Black-grey	1	3.200	**6105117**
MTG-3R L AL1	Aluminium painted	1	3.200	**6105120**

PC Polycarbonate

Multimedia support with three cinch connection sockets for component video, straight cable outlet, with labelling panel, three cinch sockets (RCA) with soldered connection, colour coding red / green / blue. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






Component video connection, 1 module, slanting outlet, as soldered connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-3R L RW1	Pure white	1	3.400	**6105126**
MTS-3R L SWGR1	Black-grey	1	3.400	**6105129**
MTS-3R L AL1	Aluminium painted	1	3.400	**6105132**

PC Polycarbonate

Multimedia support with three cinch connection sockets for component video, slanting cable outlet, with labelling panel, three cinch sockets (RCA) with soldered connection, colour coding red / green / blue. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






Component video connection, 1 module, straight outlet, as 1:1 coupling

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-3R F RW1	Pure white	1	3.200	**6105138**
MTG-3R F SWGR1	Black-grey	1	3.200	**6105141**
MTG-3R F AL1	Aluminium painted	1	3.200	**6105144**

PC Polycarbonate

Multimedia support with three cinch connection sockets for component video, straight cable outlet, with labelling panel, three cinch couplings (RCA), socket-socket version, colour coding red / green / blue. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Component video connection, 1 module, slanting outlet, as 1:1 coupling






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-3R F RW1	Pure white	1	3.400	**6105150**
MTS-3R F SWGR1	Black-grey	1	3.400	**6105153**
MTS-3R F AL1	Aluminium painted	1	3.400	**6105156**

PC Polycarbonate

Multimedia support with three cinch connection sockets for component video, slanting cable outlet, with labelling panel, three cinch couplings (RCA), socket-socket version, colour coding red / green / blue. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Audio/video cinch connection, 1 module, straight outlet, as soldered connection






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-12R L RW1	Pure white	1	3.200	**6105162**
MTG-12R L SWGR1	Black-grey	1	3.200	**6105165**
MTG-12R L AL1	Aluminium painted	1	3.200	**6105168**

PC Polycarbonate

Multimedia support with three cinch connection sockets for audio-video, straight cable outlet, with labelling panel, three cinch sockets (RCA) with soldered connection, colour coding yellow / red / white. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Audio/video cinch connection, 1 module, slanting outlet, as soldered connection






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-12R L RW1	Pure white	1	3.400	**6105174**
MTS-12R L SWGR1	Black-grey	1	3.400	**6105177**
MTS-12R L AL1	Aluminium painted	1	3.400	**6105180**

PC Polycarbonate

Multimedia support with three cinch connection sockets for audio/video, slanting cable outlet, with labelling panel, three cinch sockets (RCA) with soldered connection, colour coding yellow / red / white. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Audio/video cinch connection, 1 module, straight outlet, as 1:1 coupling





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-12R F RW1	Pure white	1	3.200	**6105186**
MTG-12R F SWGR1	Black-grey	1	3.200	**6105189**
MTG-12R F AL1	Aluminium painted	1	3.200	**6105192**

PC Polycarbonate

Multimedia support with three cinch connection sockets for audio/video, straight cable outlet, with labelling panel, three cinch couplings (RCA), socket-socket version, colour coding yellow / red / white. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Always indicate the item number when ordering.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Audio/video cinch connection, 1 module, slanting outlet, as 1:1 coupling

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-12R F RW1	Pure white	1	3.400	6105198
MTS-12R F SWGR1	Black-grey	1	3.400	6105201
MTS-12R F AL1	Aluminium painted	1	3.400	6105204

PC Polycarbonate

Multimedia support with three cinch connection sockets for audio/video, slanting cable outlet, with labelling panel, three cinch couplings (RCA), socket-socket version, colour coding yellow / red / white. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






BNC connection, 1 module, straight outlet, as 1:1 coupling

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-BC F RW1	Pure white	1	1.500	6105018
MTG-BC F SWGR1	Black-grey	1	1.500	6105021
MTG-BC F AL1	Aluminium painted	1	1.500	6105024

PC Polycarbonate

Multimedia support with one BNC connection socket, straight cable outlet, with labelling panel, BNC cinch coupling, socket-socket version. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






BNC connection, 1 module, slanting outlet, as 1:1 coupling

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-BC F RW1	Pure white	1	1.700	6105030
MTS-BC F SWGR1	Black-grey	1	1.700	6105033
MTS-BC F AL1	Aluminium painted	1	1.700	6105036

PC Polycarbonate

Multimedia support with one BNC connection socket, slanting cable outlet, with labelling panel, BNC cinch coupling, socket-socket version. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






2 x BNC connection, 1 module, straight outlet, as 1:1 coupling

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-2BC F RW1	Pure white	1	2.500	6105090
MTG-2BC F SWGR1	Black-grey	1	2.500	6105093
MTG-2BC F AL1	Aluminium painted	1	2.500	6105096

PC Polycarbonate

Multimedia support with two BNC connection sockets, straight cable outlet, with labelling panel, two BNC couplings, socket-socket version. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






2 x BNC connection, 1 module, slanting outlet, as 1:1 coupling

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-2BC F RW1	Pure white	1	2.700	6105102
MTS-2BC F SWGR1	Black-grey	1	2.700	6105105
MTS-2BC F AL1	Aluminium painted	1	2.700	6105108

PC Polycarbonate

Multimedia support with two BNC connection sockets, slanting cable outlet, with labelling panel, two BNC couplings, socket-socket version. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

XLR connection, 1 module, straight outlet, 3-pin socket, as soldered connection






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-X3F L RW1	Pure white	1	3.000	**6105210**
MTG-X3F L SWGR1	Black-grey	1	3.000	**6105213**
MTG-X3F L AL1	Aluminium painted	1	3.000	**6105216**

PC Polycarbonate

Multimedia support with one XLR connection socket, straight cable outlet, without labelling panel, 3-pin XLR socket with soldered connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

XLR connection, 1 module, straight outlet, 3-pin connector, as soldered connection






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-X3M L RW1	Pure white	1	3.000	**6105222**
MTG-X3M L SWGR1	Black-grey	1	3.000	**6105225**
MTG-X3M L AL1	Aluminium painted	1	3.000	**6105228**

PC Polycarbonate

Multimedia support with one XLR connection socket, straight cable outlet, without labelling panel, 3-pin XLR connector with soldered connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

XLR connection, 1 module, straight outlet, 3-pin socket, as screw connection






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-X3F S RW1	Pure white	1	3.500	**6105250**
MTG-X3F S SWGR1	Black-grey	1	3.500	**6105252**
MTG-X3F S AL1	Aluminium painted	1	3.500	**6105254**

PC Polycarbonate

Multimedia support with one XLR connection socket, straight cable outlet, without labelling panel, XLR 3-pin socket with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

XLR connection, 1 module, straight outlet, 3-pin connection, as screw connection






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-X3M S RW1	Pure white	1	3.500	**6105258**
MTG-X3M S SWGR1	Black-grey	1	3.500	**6105260**
MTG-X3M S AL1	Aluminium painted	1	3.500	**6105262**

PC Polycarbonate

Multimedia support with one XLR connection socket, straight cable outlet, without labelling panel, XLR 3-pin socket with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Speakon connection, 1 module, straight outlet, 4-pin socket, as screw connection





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-SON S RW1	Pure white	1	2.800	**6105270**
MTG-SON S SWGR1	Black-grey	1	2.800	**6105272**
MTG-SON S AL1	Aluminium painted	1	2.800	**6105274**

PC Polycarbonate

Multimedia support with one Speakon connection socket, straight cable outlet, without labelling panel, Speakon 4-pin socket with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18


Antenna connection, 1 module, TV / radio / SAT, antenna socket

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ANT-3SD RW1	Pure white	1	11.596	**6105282**
ANT-3SD AL1	Aluminium painted	1	11.000	**6105286**

PC Polycarbonate

Socket for antenna, BK and satellite reception systems with connection for TV and radio.

Frequency: 5–2150 MHz
Heat attenuation: 5-862 MHz - 1dB
950-2150 MHz - 2 dB
Return channel attenuation: 14 dB
EMC protection class A






DVI-D connection, 1 module, straight outlet, as screw connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-DVI S RW1	Pure white	1	3.500	**6104730**
MTG-DVI S SWGR1	Black-grey	1	3.500	**6104733**
MTG-DVI S AL1	Aluminium painted	1	3.500	**6104736**

PC Polycarbonate

Multimedia support with one DVI-D connection socket, straight cable outlet, with labelling panel, DVI-D socket with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






DVI-D connection, 1 module, slanting outlet, as screw connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-DVI S RW1	Pure white	1	3.700	**6104742**
MTS-DVI S SWGR1	Black-grey	1	3.700	**6104745**
MTS-DVI S AL1	Aluminium painted	1	3.700	**6104748**

PC Polycarbonate

Multimedia support with one DVI-D connection socket, slanting cable outlet, with labelling panel, DVI-D socket with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






DVI-I connection, 1 module, straight outlet, with connection cable

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-DVI F RW1	Pure white	1	6.000	**6104754**
MTG-DVI F SWGR1	Black-grey	1	6.000	**6104757**
MTG-DVI F AL1	Aluminium painted	1	6.000	**6104760**

PC Polycarbonate

Multimedia support with one DVI-I connection socket, straight cable outlet, with labelling panel, short DVI-I connection cable, socket-socket version. Support with locking fastening, suitable for horizontal and vertical installation in the system environment.






DVI-I connection, 1 module, slanting outlet, with connection cable

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-DVI F RW1	Pure white	1	6.200	**6104766**
MTS-DVI F SWGR1	Black-grey	1	6.200	**6104769**
MTS-DVI F AL1	Aluminium painted	1	6.200	**6104772**

PC Polycarbonate

Multimedia support with one DVI-I connection socket, slanting cable outlet, with labelling panel, short DVI-I connection cable, socket-socket version. Support with locking fastening, suitable for horizontal and vertical installation in the system environment.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

HDMI connection, 1 module, straight outlet, as screw connection






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-HD S RW1	Pure white	1	3.200	**6104802**
MTG-HD S SWGR1	Black-grey	1	3.200	**6104805**
MTG-HD S AL1	Aluminium painted	1	3.200	**6104808**

PC Polycarbonate

Multimedia support with one HDMI connection socket, straight cable outlet, with labelling panel, HDMI socket with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

HDMI connection, 1 module, slanting outlet, as screw connection






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-HD S RW1	Pure white	1	3.400	**6104814**
MTS-HD S SWGR1	Black-grey	1	3.400	**6104817**
MTS-HD S AL1	Aluminium painted	1	3.400	**6104820**

PC Polycarbonate

Multimedia support with one HDMI connection socket, slanting cable outlet, with labelling panel, HDMI socket with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

HDMI connection, 1 module, straight outlet, with connection cable






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-HD F RW1	Pure white	1	6.000	**6104826**
MTG-HD F SWGR1	Black-grey	1	6.000	**6104829**
MTG-HD F AL1	Aluminium painted	1	6.000	**6104832**

PC Polycarbonate

Multimedia support with one HDMI connection socket, straight cable outlet, with labelling panel, short HDMI connection cable, socket-socket version. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

HDMI connection, 1 module, slanting outlet, with connection cable





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-HD F RW1	Pure white	1	6.200	**6104838**
MTS-HD F SWGR1	Black-grey	1	6.200	**6104841**
MTS-HD F AL1	Aluminium painted	1	6.200	**6104844**


PC Polycarbonate

Multimedia support with one HDMI connection socket, slanting cable outlet, with labelling panel, short HDMI connection cable, socket-socket version. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Modul 45®, universal multimedia support

Multimedia support for VGA / D-Sub9 plug connector, 1 module, straight outlet





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-DB O RW1	Pure white	1	0.700	**6104706**
MTG-DB O SWGR1	Black-grey	1	0.700	**6104709**
MTG-DB O AL1	Aluminium painted	1	0.700	**6104712**

PC Polycarbonate

Multimedia support for a VGA / D-Sub9 plug connector, straight cable outlet, with labelling panel, without plug connector. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.

Multimedia support for VGA / D-Sub9 plug connector, 1 module, slanting outlet

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-DB O RW1	Pure white	1	0.900	**6104718**
MTS-DB O SWGR1	Black-grey	1	0.900	**6104721**
MTS-DB O AL1	Aluminium painted	1	0.900	**6104724**

PC Polycarbonate

Multimedia support for a VGA / D-Sub9 plug connector, slanting cable outlet, with labelling panel, without plug connector. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






Multimedia support for DVI plug connector, 1 module, straight outlet

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-DV O RW1	Pure white	1	0.700	**6104778**
MTG-DV O SWGR1	Black-grey	1	0.700	**6104781**
MTG-DV O AL1	Aluminium painted	1	0.700	**6104784**

PC Polycarbonate

Multimedia support for a DVI plug connector, straight cable outlet, with labelling panel, without plug connector. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






Multimedia support for DVI plug connector, 1 module, slanting outlet

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-DV O RW1	Pure white	1	0.900	**6104790**
MTS-DV O SWGR1	Black-grey	1	0.900	**6104793**
MTS-DV O AL1	Aluminium painted	1	0.900	**6104796**

PC Polycarbonate

Multimedia support for a DVI plug connector, slanting cable outlet, with labelling panel, without plug connector. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






Multimedia support for SLR plug connector, 1 module, straight outlet

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-X O RW1	Pure white	1	0.600	**6105234**
MTG-X O SWGR1	Black-grey	1	0.600	**6105237**
MTG-X O AL1	Aluminium painted	1	0.600	**6105240**

PC Polycarbonate

Multimedia support for a XLR plug connector, straight cable outlet, without labelling panel, without plug connector. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.







Equipotential bonding socket, 1 module, straight outlet

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
PAD-ID6 RW1	Pure white	1	5.000	**6120003**
PAD-ID6 SWGR1	Black-grey	1	5.000	**6120001**
PAD-ID6 AL1	Aluminium painted	1	5.000	**6120005**

PC Polycarbonate

Equipotential bonding socket to DIN 42801, socket in black with green-yellow colour ring, cable connection to rear with M6 screw bolt, including two nuts, washers and a serrated washer.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Cable outlet for 3–11 mm cross-section






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
KAL-K11 RW1	Pure white	1	3.500	6117420
KAL-K11 SWGR1	Black-grey	1	3.500	6117421
KAL-K11 AL1	Aluminium painted	1	3.500	6117422

PC Polycarbonate

Two-part cable outlet with labelling panel, consisting of a cable support with strain relief and a cover. The strain relief is suited for cable cross-sections of 3 to 11 mm. The locking fastening is suitable for horizontal and vertical installation in the system environment.

Blanking cover with labelling panel, 1/2 module






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ADP-BF RW0.5	Pure white	1	0.400	6117410
ADP-BF SWGR0.5	Black-grey	1	0.400	6117411
ADP-BF AL0.5	Aluminium painted	1	0.400	6117412

PC Polycarbonate

Blanking cover with labelling panel, suited for labelling devices in Rapid 45 device installation trunking systems and ISS service poles with a 45 mm system opening.

Blanking cover, 1/2 module






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ADP-B RW0.5	Pure white	10	0.400	6117414
ADP-B SWGR0.5	Black-grey	10	0.400	6117415
ADP-B AL0.5	Aluminium painted	1	0.400	6117416

Blanking cover for closing off empty spaces for a half device (1/2 module).

Blanking cover, 1 module






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ADP-B RW1	Pure white	10	0.800	6117406
ADP-B SWGR1	Black-grey	10	0.800	6117407
ADP-B AL1	Aluminium painted	1	0.800	6117408

Blanking cover for closing off empty spaces for a device (one module).

Modul 45®, protective contact sockets 0°

Socket 0°, protective contact, single





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D0 RW1	Pure white	1	4.200	6120008
STD-D0 ROR1	Pure orange	1	4.200	6120010
STD-D0 MZGN1	Mint green	1	4.200	6120012
STD-D0 SRO1	Signal red	1	4.200	6120014
STD-D0 SWGR1	Black-grey	1	4.200	6120016
STD-D0 AL1	Aluminium painted	1	4.200	6120018

PC Polycarbonate


Protective contact socket single 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Socket 0°, protective contact, double

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D0 RW2	Pure white	1	8.000	6120022
STD-D0 ROR2	Pure orange	1	8.000	6120024
STD-D0 MZGN2	Mint green	1	8.000	6120026
STD-D0 SRO2	Signal red	1	8.000	6120028
STD-D0 SWGR2	Black-grey	1	8.000	6120030
STD-D0 AL2	Aluminium painted	1	8.000	6120032






PC Polycarbonate

Protective contact socket double 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

Socket 0°, protective contact, triple

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D0 RW3	Pure white	1	12.200	6120042
STD-D0 ROR3	Pure orange	1	12.200	6120044
STD-D0 MZGN3	Mint green	1	12.200	6120046
STD-D0 SRO3	Signal red	1	12.200	6120048
STD-D0 SWGR3	Black-grey	1	12.200	6120050
STD-D0 AL3	Aluminium painted	1	12.200	6120052






PC Polycarbonate

Protective contact socket triple 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

Socket 0°, protective contact, encoded version, single

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D0K SRO1	Signal red	1	4.200	6120292






PC Polycarbonate

Power socket single 0°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.
The socket can only be used in conjunction with an encoding pin, type CST-STD.

Socket 0°, protective contact, encoded version, double

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D0K SRO2	Signal red	1	8.000	6120294






PC Polycarbonate

Power socket double 0°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.
The socket can only be used in conjunction with an encoding pin, type CST-STD.

Socket 0°, protective contact, encoded version, triple

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D0K SRO3	Signal red	1	12.200	6120296





PC Polycarbonate


Power socket triple 0°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.
The socket can only be used in conjunction with an encoding pin, type CST-STD.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Socket 33°, protective contact, single






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D3 RW1	Pure white	1	4.000	6120072
STD-D3 ROR1	Pure orange	1	4.000	6120074
STD-D3 MZGN1	Mint green	1	4.000	6120076
STD-D3 SRO1	Signal red	1	4.000	6120078
STD-D3 SWGR1	Black-grey	1	4.000	6120080
STD-D3 AL1	Aluminium painted	1	4.000	6120082

PC Polycarbonate

Protective contact socket single 33°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

Socket 33°, protective contact, double






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D3 RW2	Pure white	1	7.800	6120102
STD-D3 ROR2	Pure orange	1	7.800	6120104
STD-D3 MZGN2	Mint green	1	7.800	6120106
STD-D3 SRO2	Signal red	1	7.800	6120108
STD-D3 SWGR2	Black-grey	1	7.800	6120110
STD-D3 AL2	Aluminium painted	1	7.800	6120112

PC Polycarbonate

Protective contact socket double 33°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

Socket 33°, protective contact, triple






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D3 RW3	Pure white	1	11.000	6120122
STD-D3 ROR3	Pure orange	1	11.000	6120124
STD-D3 MZGN3	Mint green	1	11.000	6120126
STD-D3 SRO3	Signal red	1	11.000	6120128
STD-D3 SWGR3	Black-grey	1	11.000	6120130
STD-D3 AL3	Aluminium painted	1	11.000	6120132

PC Polycarbonate

Protective contact socket triple 33°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

Socket 33°, protective contact, encoded version, single






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D3K SRO1	Signal red	1	4.000	6120302

PC Polycarbonate

Power socket single 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.
The socket can only be used in conjunction with an encoding pin, type CST-STD.

Socket 33°, protective contact, encoded version, double





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D3K SRO2	Signal red	1	7.700	6120304

PC Polycarbonate

Power socket double 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.
The socket can only be used in conjunction with an encoding pin, type CST-STD.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.

Socket 33°, protective contact, encoded version, triple

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D3K SRO3	Signal red	1	11.000	6120306

PC Polycarbonate

Power socket triple 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.
The socket can only be used in conjunction with an encoding pin, type CST-STD.






Socket 0°, with earthing pin, single

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F0 RW1	Pure white	1	4.000	6120152
STD-F0 ROR1	Pure orange	1	4.000	6120154
STD-F0 MZGN1	Mint green	1	4.000	6120155
STD-F0 SRO1	Signal red	1	4.000	6120158
STD-F0 SWGR1	Black-grey	1	4.000	6120160
STD-F0 AL1	Aluminium painted	1	4.000	6120162

PC Polycarbonate

Socket with earthing pin single 0°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V ~, with connection terminals to IEC 60884-1.






Socket 0°, with earthing pin, double

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F0 RW2	Pure white	1	7.700	6120172
STD-F0 ROR2	Pure orange	1	7.700	6120174
STD-F0 MZGN2	Mint green	1	7.700	6120176
STD-F0 SRO2	Signal red	1	7.700	6120178
STD-F0 SWGR2	Black-grey	1	7.700	6120180
STD-F0 AL2	Aluminium painted	1	7.700	6120182

PC Polycarbonate

Socket with earthing pin double 0°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V ~, with connection terminals to IEC 60884-1.






Socket 0°, with earthing pin, triple

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F0 RW3	Pure white	1	11.800	6120192
STD-F0 ROR3	Pure orange	1	11.800	6120194
STD-F0 MZGN3	Mint green	1	11.800	6120196
STD-F0 SRO3	Signal red	1	11.800	6120198
STD-F0 SWGR3	Black-grey	1	11.800	6120200
STD-F0 AL3	Aluminium painted	1	11.800	6120201

PC Polycarbonate

Socket with earthing pin triple 0°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V ~, with connection terminals to IEC 60884-1.






Socket 0°, with earthing pin, encoded version, single

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F0K SRO1	Signal red	1	4.000	6120312

PC Polycarbonate

Socket with earthing pin single 0°, encoded version, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1. The socket can only be used in conjunction with an encoding pin, type CST-STD.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Socket 0°, with earthing pin, encoded version, double






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F0K SRO2	Signal red	1	7.800	6120314

PC Polycarbonate

Socket with earthing pin double 0°, encoded version, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1. The socket can only be used in conjunction with an encoding pin, type CST-STD.

Socket 0°, with earthing pin, encoded version, triple






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F0K SRO3	Signal red	1	11.800	6120316

PC Polycarbonate

Socket with earthing pin triple 0°, encoded version, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1. The socket can only be used in conjunction with an encoding pin, type CST-STD.

Socket 33°, with earthing pin, single






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F3 RW1	Pure white	1	3.800	6120222
STD-F3 ROR1	Pure orange	1	3.800	6120224
STD-F3 MZGN1	Mint green	1	3.800	6120226
STD-F3 SRO1	Signal red	1	3.800	6120228
STD-F3 SWGR1	Black-grey	1	3.800	6120230
STD-F3 AL1	Aluminium painted	1	3.800	6120232

PC Polycarbonate

Socket with earthing pin single 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V ~, with connection terminals to IEC 60884-1.

Socket 33°, with earthing pin, triple






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F3 RW3	Pure white	1	10.500	6120262
STD-F3 ROR3	Pure orange	1	10.500	6120264
STD-F3 MZGN3	Mint green	1	10.500	6120266
STD-F3 SRO3	Signal red	1	10.500	6120268
STD-F3 SWGR3	Black-grey	1	10.500	6120270
STD-F3 AL3	Aluminium painted	1	10.500	6120272

PC Polycarbonate

Socket with earthing pin triple 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V ~, with connection terminals to IEC 60884-1.

Socket 33°, with earthing pin, double





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F3 RW2	Pure white	1	7.500	6120242
STD-F3 ROR2	Pure orange	1	7.500	6120244
STD-F3 MZGN2	Mint green	1	7.500	6120246
STD-F3 SRO2	Signal red	1	7.500	6120248
STD-F3 SWGR2	Black-grey	1	7.500	6120250
STD-F3 AL2	Aluminium painted	1	7.500	6120252

PC Polycarbonate

Socket with earthing pin double 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V ~, with connection terminals to IEC 60884-1.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.

Socket 33°, with earthing pin, encoded version, single

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F3K SRO1	Signal red	1	3.800	6120322

PC Polycarbonate

Socket with earthing pin single 33°, encoded version, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1. The socket can only be used in conjunction with an encoding pin, type CST-STD.






Socket 33°, with earthing pin, encoded version, double

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F3K SRO2	Signal red	1	7.500	6120324

PC Polycarbonate

Socket with earthing pin double 33°, encoded version, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1. The socket can only be used in conjunction with an encoding pin, type CST-STD.






Socket 33°, with earthing pin, encoded version, triple

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F3K SRO3	Signal red	1	10.500	6120326

PC Polycarbonate

Socket with earthing pin triple 33°, encoded version, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1. The socket can only be used in conjunction with an encoding pin, type CST-STD.






Connection adapter, straight, connector part GST18

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STA-SKS S1 SW	Black	10	1.200	6117192
STA-SKS S1 W	White	10	1.200	6117193

PA Polyamide

Connector part adapter, straight, for connection to an STD-D0C / STD-D3C or STD-F0C / STD-F3C socket from the side, for VL extension cable with Wieland connector GST 18i 3p.







Connection adapter, straight, socket part GST18

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
BTA-SKS S1 SW	Black	10	1.200	6117190
BTA-SKS S1 W	White	10	1.200	6117191

PA Polyamide

Connector part adapter, straight, for connection to an STD-D0C / STD-D3C or STD-F0C / STD-F3C socket from the side, for VL extension cable with Wieland connector GST 18i 3p.







Connection adapter, GST18i, straight

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VB-G GST18i3p	Black	10	1.760	6108045

PA Polyamide

Connection adapter GST18i for combining STD-D0C / STD-D3C or STD-F0C / STD-F3C sockets together with straight connection adapters, pluggable connection with integrated strain relief. Suitable for device connections in the device installation trunking systems Rapid 45 and Rapid 80 and in ISS service poles.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Connector part 3-pin, spring power connection





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ST-F GST18i3p SW	Black	1	2.600	6108050
ST-F GST18i3p W	White	1	2.620	6108051


Connector part, 3-pin, type GST18i with spring power connection for rigid cables of 1.5–2.5 mm², single-wire and ultrasonically welded, fine wire cables 1.5 mm² with end sleeves, unmounted with strain relief, can be terminated in situ, 250 V, 16 A.

Two connections per pole, for cables H05VV, NYM (Ø 7.8–10.33 mm), lockable, a lock should be provided for strain relief according to VDE 0628.

Stripping length: 45 mm
Stripped length: 9 mm

Connector part, 3-pin, screw connection






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ST-S GST18i3p SW	Black	1	2.030	6108054
ST-S GST18i3p W	White	1	2.030	6108055

Connector part, 3-pin, type GST18i with screw connection, low height (no slot loss in combination with distributor blocks), for cross-sections of 0.75–2.5 mm², single- and fine-wire cables connectable without end sleeve, for cable diameters between 6.5–10.5 mm (H05VV, NYM), unmounted with strain relief, terminable in situ, 250 V, 16 A.

Stripping length: 31 mm
Insulation removal length: 7 mm

Connector part, 3-pin, screw connection






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ST-S4 GST18i3 SW	Black	1	1.600	6108060
ST-S4 GST18i3 W	White	1	1.600	6108062

PA Polyamide

Connector part, 3-pin, type GST18i with screw connection for cables of 1.5–4.0 mm² and cable diameters between 10.5–14.5 mm (H05VV, NYM), unmounted with strain relief, terminable in situ, 250 V, 16 A.

Socket section 3-pin, spring power connection





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
BT-F GST18i3p SW	Black	1	2.620	6108052
BT-F GST18i3p W	White	1	2.690	6108053


Socket part, 3-pin, type GST18i with spring power connection for rigid cables of 1.5–2.5 mm², single-wire and ultrasonically welded, fine wire cables 1.5 mm² with end sleeves, unmounted with strain relief, can be terminated in situ, 250 V, 16 A.

Two connections per pole, for cables H05VV, NYM (Ø 7.8–10.33 mm), lockable, a lock should be provided for strain relief according to VDE 0628.

Stripping length: 45 mm
Stripped length: 9 mm

Socket section 3-pin, screw connection





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
BT-S GST18i3p SW	Black	1	2.150	6108056
BT-S GST18i3p W	White	1	2.150	6108057

Socket part, 3-pin, type GST18i with screw connection, low height (no slot loss in combination with distributor blocks), for cross-sections of 0.75–2.5 mm², single- and fine-wire cables connectable without end sleeve, for cable diameters between 6.5–10.5 mm (H05VV, NYM), unmounted with strain relief, terminable in situ, 250 V, 16 A.

Stripping length: 31 mm
Insulation removal length: 7 mm

Always indicate the item number when ordering.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


Socket section 3-pin, screw connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
BT-S4 GST18i3 SW	Black	1	1.600	6108064
BT-S4 GST18i3 W	White	1	1.600	6108066

PA Polyamide

Socket section, 3-pin, type GST18i with screw connection for cables of 1.5–4.0 mm² and for cable diameters between 10.5–14.5 mm (H05VV, NYM), unmounted with strain relief, terminable in situ, 250 V, 16 A.






Distributor block, 3-pole

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VB-2 GST18i3p	Black	1	3.300	6108086

PA Polyamide

Distributor block with lock, type GST18i, 1 input with 3-pin plug section and 2 outputs with 3-pin socket section.






Distributor block 3-pin

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VB-3 GST18i3p	Black	1	3.590	6108080

Distributor block with lock, type GST18i, one input with plug section 3-pin and three outputs with socket section 3-pin.






Distributor block 3-pin

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VB-5 GST18i3p	Black	1	5.590	6108082

Distributor block with lock, type GST18i, one input with plug section 3-pin and five outputs with socket section 3-pin.






Distributor block, 3-pin, T-shaped

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VB-T GST18i3p	Black	1	2.540	6108084

T distributor with lock, type GST18i, one input with 3-pin connector part and two outputs with 3-pin socket part.






Connector part, 5-pin, screw connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ST-S GST18i5p SW	Black	1	4.330	6108070

Connector part, 5-pin, type GST18i, with screw connection for 1.5–2.5 mm² cables, single and fine-wire, with strain relief, one connection per pin, unmounted, for cables H05VV (Ø 9.5–13.5) NYM and (Ø 10.5–13.5 mm), lockable, according to the strain relief in VDE 0628 a lock should be planned, 250 V, 16 A.

Stripping length: 8 mm
Jacket removal length: 46 mm






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Socket section 5-pin, screw connection







Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
BT-S GST18i5p SW	Black	1	4.550	**6108072**

Socket part, 5-pin, type GST18i, with screw connection for 1.5 to 2.5 mm² cables, single and fine-wire, with strain relief, one connection per pin, unmounted, for cables H05VV (Ø 9.5 – 13.5) NYM and (Ø 10.5 to 13.5 mm), lockable, according to the strain relief in VDE 0628 a lock should be planned, 250 V, 16 A.

Stripping length: 8 mm
Jacket removal length: 46 mm

Locking





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VR-GST18	Black	10	0.100	**6108074**

PA Polyamide

Locking clip for GST18, plug connections, for locking connection cables.

Connection cables with GST18 connector system

3-wire connection cable, PVC, cross-section 2.5 mm², black





Type	Cable length mm	Cross-section mm²	Number of poles	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VL-3Q2.5 1 SW	1000	2.5	3	Black	1	18.000	**6108150**
VL-3Q2.5 2 SW	2000	2.5	3	Black	1	36.000	**6108151**
VL-3Q2.5 3 SW	3000	2.5	3	Black	1	54.000	**6108152**
VL-3Q2.5 4 SW	4000	2.5	3	Black	1	72.000	**6108153**
VL-3Q2.5 5 SW	5000	2.5	3	Black	1	90.000	**6108154**
VL-3Q2.5 6 SW	6000	2.5	3	Black	1	108.000	**6108155**
VL-3Q2.5 7 SW	7000	2.5	3	Black	1	126.000	**6108156**
VL-3Q2.5 8 SW	8000	2.5	3	Black	1	144.000	**6108157**
VL-3Q2.5 9 SW	9000	2.5	3	Black	1	162.000	**6108158**
VL-3Q2.5 10 SW	10000	2.5	3	Black	1	180.000	**6108159**

Connection cable 3 x 2.5 mm² in the version socket – connector with GST18i connection system.

3-wire connection cable, halogen-free, cross-section 2.5 mm², black





Type	Cable length mm	Cross-section mm²	Number of poles	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VL-3Q2.5 H1 SW	1000	2.5	3	Black	1	16.000	**6108450**
VL-3Q2.5 H2 SW	2000	2.5	3	Black	1	32.000	**6108451**
VL-3Q2.5 H3 SW	3000	2.5	3	Black	1	48.000	**6108452**
VL-3Q2.5 H4 SW	4000	2.5	3	Black	1	64.000	**6108453**
VL-3Q2.5 H5 SW	5000	2.5	3	Black	1	80.000	**6108454**
VL-3Q2.5 H6 SW	6000	2.5	3	Black	1	96.000	**6108455**
VL-3Q2.5 H7 SW	7000	2.5	3	Black	1	112.000	**6108456**
VL-3Q2.5 H8 SW	8000	2.5	3	Black	1	128.000	**6108457**
VL-3Q2.5 H9 SW	9000	2.5	3	Black	1	144.000	**6108458**
VL-3Q2.5 H10 SW	10000	2.5	3	Black	1	160.000	**6108459**


Halogen-free connection cables 3 x 2.5 mm² in the version socket – connector with GST18i connection system.

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Socket 0°, Connect 45, protective contact, single

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D0C RW1	Pure white	1	6.700	6120340
STD-D0C ROR1	Pure orange	1	6.700	6120344
STD-D0C MZGN1	Mint green	1	6.700	6120346
STD-D0C SRO1	Signal red	1	6.700	6120348
STD-D0C SWGR1	Black-grey	1	6.700	6120350
STD-D0C AL1	Aluminium painted	1	6.700	6120352






PC Polycarbonate

Protective contact socket with connection to side, single 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1, suitable for the installation in Rapid 45 device installation trunking system.

Socket 0°, Connect 45, protective contact, double

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D0C RW2	Pure white	1	10.100	6120362
STD-D0C ROR2	Pure orange	1	10.100	6120364
STD-D0C MZGN2	Mint green	1	10.100	6120366
STD-D0C SRO2	Signal red	1	10.100	6120368
STD-D0C SWGR2	Black-grey	1	10.100	6120370
STD-D0C AL2	Aluminium painted	1	10.100	6120372






PC Polycarbonate

Protective contact socket with connection to side, double 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1, suitable for the installation in Rapid 45 device installation trunking systems.

Socket 0°, Connect 45, protective contact, triple

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D0C RW3	Pure white	1	16.500	6120382
STD-D0C ROR3	Pure orange	1	16.500	6120384
STD-D0C MZGN3	Mint green	1	16.500	6120386
STD-D0C SRO3	Signal red	1	16.500	6120388
STD-D0C SWGR3	Black-grey	1	16.500	6120390
STD-D0C AL3	Aluminium painted	1	16.500	6120392






PC Polycarbonate

Protective contact socket with connection to side, Triple 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1, suitable for the installation in Rapid 45 device installation trunking systems.

Socket 0°, Connect 80, protective contact, single

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D0C8 RW1	Pure white	1	8.500	6120412
STD-D0C8 ROR1	Pure orange	1	8.500	6120414
STD-D0C8 MZGN1	Mint green	1	8.500	6120416
STD-D0C8 SRO1	Signal red	1	8.500	6120418
STD-D0C8 SWGR1	Black-grey	1	8.500	6120420
STD-D0C8 AL1	Aluminium painted	1	8.500	6120422






PC Polycarbonate


Protective contact socket with connection to side, single 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1, suitable for the installation in Rapid 80 device installation trunking system.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Socket 0°, Connect 80, protective contact, double







Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D0C8 RW2	Pure white	1	13.000	6120432
STD-D0C8 ROR2	Pure orange	1	13.000	6120434
STD-D0C8 MZGN2	Mint green	1	13.000	6120436
STD-D0C8 SRO2	Signal red	1	13.000	6120438
STD-D0C8 SWGR2	Black-grey	1	13.000	6120440
STD-D0C8 AL2	Aluminium painted	1	13.000	6120442

PC Polycarbonate

Protective contact socket with connection to side, double 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1, suitable for the installation in Rapid 80 device installation trunking systems.

Socket 0°, Connect 80, protective contact, triple






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D0C8 RW3	Pure white	1	20.000	6120452
STD-D0C8 ROR3	Pure orange	1	20.000	6120454
STD-D0C8 MZGN3	Mint green	1	20.000	6120456
STD-D0C8 SRO3	Signal red	1	20.000	6120458
STD-D0C8 SWGR3	Black-grey	1	20.000	6120460
STD-D0C8 AL3	Aluminium painted	1	20.000	6120462

PC Polycarbonate

Protective contact socket with connection to side, triple 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1, suitable for the installation in Rapid 80 device installation trunking systems.

Socket 33°, Connect 45, protective contact, double






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D3C RW2	Pure white	1	8.500	6120482
STD-D3C ROR2	Pure orange	1	8.500	6120484
STD-D3C MZGN2	Mint green	1	8.500	6120486
STD-D3C SRO2	Signal red	1	8.500	6120488
STD-D3C SWGR2	Black-grey	1	8.500	6120490
STD-D3C AL2	Aluminium painted	1	8.500	6120492

PC Polycarbonate

Power socket with side connection double 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

Socket 33°, Connect 45, protective contact, triple





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D3C RW3	Pure white	1	11.500	6120502
STD-D3C ROR3	Pure orange	1	11.500	6120504
STD-D3C MZGN3	Mint green	1	11.500	6120506
STD-D3C SRO3	Signal red	1	11.500	6120508
STD-D3C SWGR3	Black-grey	1	11.500	6120510
STD-D3C AL3	Aluminium painted	1	11.500	6120512

PC Polycarbonate


Power socket with side connection triple 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Socket 0°, Connect 45, with earthing pin, single

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F0C RW1	Pure white	1	6.500	6120532
STD-F0C ROR1	Pure orange	1	6.500	6120534
STD-F0C MZGN1	Mint green	1	6.500	6120536
STD-F0C SRO1	Signal red	1	6.500	6120538
STD-F0C SWGR1	Black-grey	1	6.500	6120540
STD-F0C AL1	Aluminium painted	1	6.500	6120542






PC Polycarbonate

Earthing pin socket with connection to side, single 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1, suitable for the installation in Rapid 45 device installation trunking systems.

Socket 0°, Connect 45, with earthing pin, double

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F0C RW2	Pure white	1	9.900	6120552
STD-F0C ROR2	Pure orange	1	9.900	6120554
STD-F0C MZGN2	Mint green	1	9.900	6120556
STD-F0C SRO2	Signal red	1	9.900	6120558
STD-F0C SWGR2	Black-grey	1	9.900	6120560
STD-F0C AL2	Aluminium painted	1	9.900	6120562






PC Polycarbonate

Earthing pin socket with connection to side, double 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1, suitable for the installation in Rapid 45 device installation trunking systems.

Socket 0°, Connect 45, with earthing pin, triple

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F0C RW3	Pure white	1	13.900	6120572
STD-F0C ROR3	Pure orange	1	13.900	6120574
STD-F0C MZGN3	Mint green	1	13.900	6120576
STD-F0C SRO3	Signal red	1	13.900	6120578
STD-F0C SWGR3	Black-grey	1	13.900	6120580
STD-F0C AL3	Aluminium painted	1	13.900	6120582






PC Polycarbonate

Earthing pin socket with connection to side, triple 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1, suitable for the installation in Rapid 45 device installation trunking systems.

Socket 0°, Connect 80, with earthing pin, single

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F0C8 RW1	Pure white	1	8.500	6120602
STD-F0C8 ROR1	Pure orange	1	8.500	6120604
STD-F0C8 MZGN1	Mint green	1	8.500	6120606
STD-F0C8 SRO1	Signal red	1	8.500	6120608
STD-F0C8 SWGR1	Black-grey	1	8.500	6120610
STD-F0C8 AL1	Aluminium painted	1	8.500	6120612






PC Polycarbonate


Earthing pin socket with connection to side, single 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1, suitable for the installation in Rapid 80 device installation trunking systems.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Socket 0°, Connect 80, with earthing pin, double







Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F0C8 RW2	Pure white	1	13.000	6120622
STD-F0C8 ROR2	Pure orange	1	13.000	6120624
STD-F0C8 MZGN2	Mint green	1	13.000	6120626
STD-F0C8 SRO2	Signal red	1	13.000	6120628
STD-F0C8 SWGR2	Black-grey	1	13.000	6120630
STD-F0C8 AL2	Aluminium painted	1	13.000	6120632

PC Polycarbonate

Socket with earthing pin with side connection double 0°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1, suitable for installation in Rapid 80 device installation trunking systems.

Socket 0°, Connect 80, with earthing pin, triple






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F0C8 RW3	Pure white	1	17.500	6120642
STD-F0C8 ROR3	Pure orange	1	17.500	6120644
STD-F0C8 MZGN3	Mint green	1	17.500	6120646
STD-F0C8 SRO3	Signal red	1	17.500	6120648
STD-F0C8 SWGR3	Black-grey	1	17.500	6120650
STD-F0C8 AL3	Aluminium painted	1	17.500	6120652

PC Polycarbonate

Earthing pin socket with connection to side, triple 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1, suitable for the installation in Rapid 80 device installation trunking systems.

Socket 33°, Connect 45, with earthing pin, double






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F3C RW2	Pure white	1	8.500	6120672
STD-F3C ROR2	Pure orange	1	8.500	6120674
STD-F3C MZGN2	Mint green	1	8.500	6120676
STD-F3C SRO2	Signal red	1	8.500	6120678
STD-F3C SWGR2	Black-grey	1	8.500	6120680
STD-F3C AL2	Aluminium painted	1	8.500	6120682

PC Polycarbonate

Socket with earthing pin and side connection, double 33°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

Socket 33°, Connect 45, with earthing pin, triple





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F3C RW3	Pure white	1	11.500	6120692
STD-F3C ROR3	Pure orange	1	11.500	6120694
STD-F3C MZGN3	Mint green	1	11.500	6120696
STD-F3C SRO3	Signal red	1	11.500	6120698
STD-F3C SWGR3	Black-grey	1	11.500	6120700
STD-F3C AL3	Aluminium painted	1	11.500	6120702

PC Polycarbonate

Socket with earthing pin and side connection, triple 33°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

Always indicate the item number when ordering.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

CP support plate for 3 snap-in plug connectors, 3-pole

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
CP45-TP 3SI	1	6.200	**6108024**

St Steel

Support plate to accept three snap-In connectors, 3-pole, in a Consolidation Point housing.






CP support plate for 4 snap-in plug connectors, 3-pole

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
CP45-TP 4SI	1	5.700	**6108026**

St Steel

Support plate to accept four snap-In connectors, 3-pole, in a Consolidation Point housing.






CP support plate, for 8 data connection modules, type C


Type	Pack. pcs	Weight kg/100 pcs.	Item No.
CP45-TP 8C	1	5.400	**6108028**


St Steel

Support plate, type C, to accept eight data connection modules in a Consolidation Point housing. Type C has a mounting opening of 19.30 x 14.80 mm.

Support plate type C is suitable for accepting the following data connection modules: BTR (Keystone design): Cat.6A Modul und UAE Modul; Corning: Modules with Keystone seat; CobiNet: CobiDat KS module; Dätwyler: KS-T, KS-TS, MS-K and KU-T; EKU: E-Stone; Harting: Prelink Keystone Cat.6A, Fixlink Keystone Cat.6A; Komos: KDM 500 module; Leoni Kerpen: MegaLine-Connect45 socket modules Keystone; OBO: Data connection modules snap-In type ASM-C5 S, ASM-C5 GS, ASM-C6 S, ASM-C6 GS and Keystone type ASM-C6A, ASM-C6A G; R&M: Cat.6A with Keystone fastening; Rutenbeck: UM and UMflex; SETEC: UKJ and XKJ; Telegärtner: AMJ and UMJ.








Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.



Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

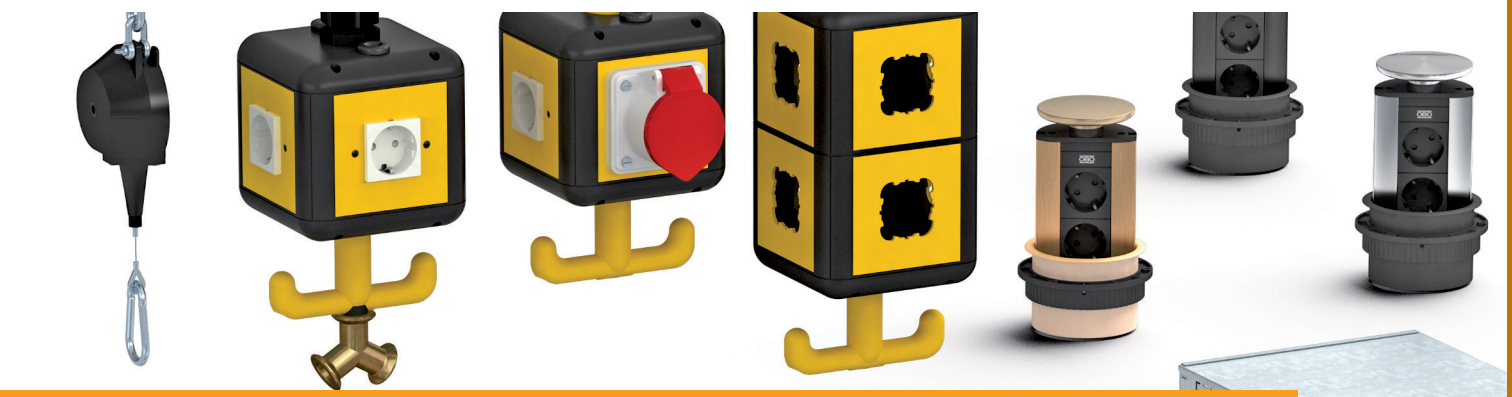

Device systems



Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18



Device systems

Modul 45® – devices

Modul 45® and standard –
Installation solutions for device installation ducts and service poles

Modul 45connect® –
Plug-in installation solutions for device installation ducts and service poles


Modul 45connect® –
plug-in installation solutions for raised and cavity floors

Modul 45® and standard –
Suspended power supply units VH / VHF

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18



see page 208



see page 240



see page 246



see page 260





see page 272

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18





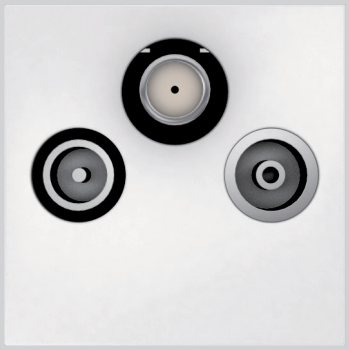

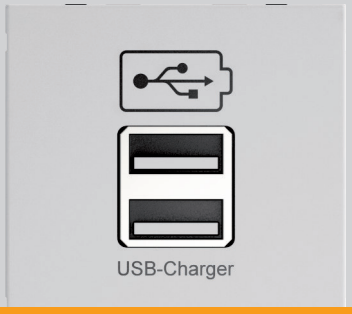





Modul 45® – devices

With their dimensions of 45 x 45 mm, the Modul 45 devices from OBO Bettermann are compact and space-saving. For this reason, the sockets, data and multimedia technology connections are ideal for use in underfloor systems, device installation ducts and service poles. The Modul 45 system makes optimum use of limited installation space.


The advantages of Modul 45 at a glance:
- Space savings thanks to compact design
- Modular structure
- Quick and easy planning
- Easy mounting
- High efficiency due to time and cost savings
- Wide range of application options
- Easy exchangeability




Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten_en / 2019/04/18 11:21:04 - 21:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Socket 0°, protective contact, single



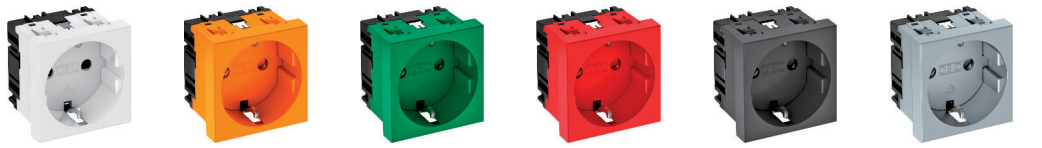


Type	STD-D0 RW1	STD-D0 ROR1	STD-D0 MZGN1	STD-D0 SRO1	STD-D0 SWGR1	STD-D0 AL1
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	4.200	4.200	4.200	4.200	4.200	4.200
Item No.	**6120008**	**6120010**	**6120012**	**6120014**	**6120016**	**6120018**

PC Polycarbonate

Protective contact socket single 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

Socket 0°, protective contact, double






Type	STD-D0 RW2	STD-D0 ROR2	STD-D0 MZGN2	STD-D0 SRO2	STD-D0 SWGR2	STD-D0 AL2
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	8.000	8.000	8.000	8.000	8.000	8.000
Item No.	**6120022**	**6120024**	**6120026**	**6120028**	**6120030**	**6120032**

PC Polycarbonate

Protective contact socket double 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

Socket 0°, protective contact, triple





Type	STD-D0 RW3	STD-D0 ROR3	STD-D0 MZGN3	STD-D0 SRO3	STD-D0 SWGR3	STD-D0 AL3
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	12.200	12.200	12.200	12.200	12.200	12.200
Item No.	**6120042**	**6120044**	**6120046**	**6120048**	**6120050**	**6120052**

PC Polycarbonate


Protective contact socket triple 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.


Socket 0°, protective contact, encoded version, single

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D0K SRO1	Signal red	1	4.200	**6120292**

PC Polycarbonate

Power socket single 0°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.
The socket can only be used in conjunction with an encoding pin, type CST-STD.
Note: The encoding pin is not contained in the scope of supply.








Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Modul 45®, protective contact sockets 0°

Socket 0°, protective contact, encoded version, double





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D0K SRO2	Signal red	1	8.000	6120294


PC Polycarbonate

Power socket double 0°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.
The socket can only be used in conjunction with an encoding pin, type CST-STD.

Note: The encoding pin is not contained in the scope of supply.

Socket 0°, protective contact, encoded version, triple





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D0K SRO3	Signal red	1	12.200	6120296


PC Polycarbonate


Power socket triple 0°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.
The socket can only be used in conjunction with an encoding pin, type CST-STD.

Note: The encoding pin is not contained in the scope of supply.

Modul 45®, protective contact sockets 33°

Socket 33°, protective contact, single



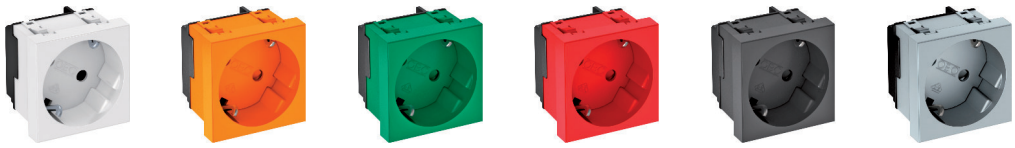



Type	STD-D3 RW1	STD-D3 ROR1	STD-D3 MZGN1	STD-D3 SRO1	STD-D3 SWGR1	STD-D3 AL1
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	4.000	4.000	4.000	4.000	4.000	4.000
Item No.	**6120072**	**6120074**	**6120076**	**6120078**	**6120080**	**6120082**

PC Polycarbonate

Protective contact socket single 33°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

Socket 33°, protective contact, double





Type	STD-D3 RW2	STD-D3 ROR2	STD-D3 MZGN2	STD-D3 SRO2	STD-D3 SWGR2	STD-D3 AL2
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	7.800	7.800	7.800	7.800	7.800	7.800
Item No.	**6120102**	**6120104**	**6120106**	**6120108**	**6120110**	**6120112**


PC Polycarbonate

Protective contact socket double 33°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Socket 33°, protective contact, triple





Type	STD-D3 RW3	STD-D3 ROR3	STD-D3 MZGN3	STD-D3 SRO3	STD-D3 SWGR3	STD-D3 AL3
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	11.000	11.000	11.000	11.000	11.000	11.000
Item No.	**6120122**	**6120124**	**6120126**	**6120128**	**6120130**	**6120132**

PC Polycarbonate


Protective contact socket triple 33°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

Socket 33°, protective contact, encoded version, single

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D3K SRO1	Signal red	1	4.000	**6120302**

PC Polycarbonate

Power socket single 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.
The socket can only be used in conjunction with an encoding pin, type CST-STD.
Note: The encoding pin is not contained in the scope of supply.






Socket 33°, protective contact, encoded version, double

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D3K SRO2	Signal red	1	7.700	**6120304**

PC Polycarbonate

Power socket double 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.
The socket can only be used in conjunction with an encoding pin, type CST-STD.
Note: The encoding pin is not contained in the scope of supply.







Socket 33°, protective contact, encoded version, triple

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D3K SRO3	Signal red	1	11.000	**6120306**

PC Polycarbonate

Power socket triple 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.
The socket can only be used in conjunction with an encoding pin, type CST-STD.
Note: The encoding pin is not contained in the scope of supply.







Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Socket 0°, with earthing pin, single







Type	STD-F0 RW1	STD-F0 ROR1	STD-F0 MZGN1	STD-F0 SRO1	STD-F0 SWGR1	STD-F0 AL1
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	4.000	4.000	4.000	4.000	4.000	4.000
Item No.	**6120152**	**6120154**	**6120155**	**6120158**	**6120160**	**6120162**

PC Polycarbonate

Socket with earthing pin single 0°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V ~, with connection terminals to IEC 60884-1.

Socket 0°, with earthing pin, double



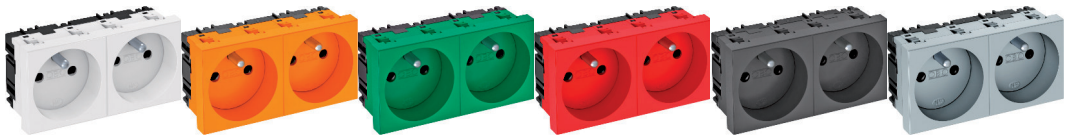


Type	STD-F0 RW2	STD-F0 ROR2	STD-F0 MZGN2	STD-F0 SRO2	STD-F0 SWGR2	STD-F0 AL2
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	7.700	7.700	7.700	7.700	7.700	7.700
Item No.	**6120172**	**6120174**	**6120176**	**6120178**	**6120180**	**6120182**

PC Polycarbonate

Socket with earthing pin double 0°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V ~, with connection terminals to IEC 60884-1.

Socket 0°, with earthing pin, triple






Type	STD-F0 RW3	STD-F0 ROR3	STD-F0 MZGN3	STD-F0 SRO3	STD-F0 SWGR3	STD-F0 AL3
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	11.800	11.800	11.800	11.800	11.800	11.800
Item No.	**6120192**	**6120194**	**6120196**	**6120198**	**6120200**	**6120201**

PC Polycarbonate

Socket with earthing pin triple 0°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V ~, with connection terminals to IEC 60884-1.

Socket 0°, with earthing pin, encoded version, single





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F0K SRO1	Signal red	1	4.000	6120312

PC Polycarbonate

Socket with earthing pin single 0°, encoded version, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1. The socket can only be used in conjunction with an encoding pin, type CST-STD.


Note: The encoding pin is not contained in the scope of supply.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Socket 0°, with earthing pin, encoded version, double

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F0K SRO2	Signal red	1	7.800	6120314

PC Polycarbonate






Socket with earthing pin double 0°, encoded version, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1. The socket can only be used in conjunction with an encoding pin, type CST-STD.


Note: The encoding pin is not contained in the scope of supply.

Socket 0°, with earthing pin, encoded version, triple

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F0K SRO3	Signal red	1	11.800	6120316

PC Polycarbonate







Socket with earthing pin triple 0°, encoded version, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1. The socket can only be used in conjunction with an encoding pin, type CST-STD.

Note: The encoding pin is not contained in the scope of supply.

Socket 33°, with earthing pin, single



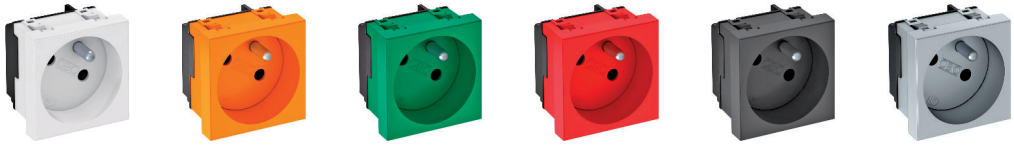



Type	STD-F3 RW1	STD-F3 ROR1	STD-F3 MZGN1	STD-F3 SRO1	STD-F3 SWGR1	STD-F3 AL1
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	3.800	3.800	3.800	3.800	3.800	3.800
Item No.	**6120222**	**6120224**	**6120226**	**6120228**	**6120230**	**6120232**

PC Polycarbonate

Socket with earthing pin single 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V ~, with connection terminals to IEC 60884-1.

Socket 33°, with earthing pin, double





Type	STD-F3 RW2	STD-F3 ROR2	STD-F3 MZGN2	STD-F3 SRO2	STD-F3 SWGR2	STD-F3 AL2
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	7.500	7.500	7.500	7.500	7.500	7.500
Item No.	**6120242**	**6120244**	**6120246**	**6120248**	**6120250**	**6120252**


PC Polycarbonate

Socket with earthing pin double 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V ~, with connection terminals to IEC 60884-1.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Modul 45®, earthing pin sockets 33°

Socket 33°, with earthing pin, triple






Type	STD-F3 RW3	STD-F3 ROR3	STD-F3 MZGN3	STD-F3 SRO3	STD-F3 SWGR3	STD-F3 AL3
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	10.500	10.500	10.500	10.500	10.500	10.500
Item No.	**6120262**	**6120264**	**6120266**	**6120268**	**6120270**	**6120272**

PC Polycarbonate

Socket with earthing pin triple 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V ~, with connection terminals to IEC 60884-1.

Socket 33°, with earthing pin, encoded version, single





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F3K SRO1	Signal red	1	3.800	**6120322**


PC Polycarbonate

Socket with earthing pin single 33°, encoded version, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1. The socket can only be used in conjunction with an encoding pin, type CST-STD.

Note: The encoding pin is not contained in the scope of supply.

Socket 33°, with earthing pin, encoded version, double






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F3K SRO2	Signal red	1	7.500	**6120324**


PC Polycarbonate

Socket with earthing pin double 33°, encoded version, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1. The socket can only be used in conjunction with an encoding pin, type CST-STD.

Note: The encoding pin is not contained in the scope of supply.

Socket 33°, with earthing pin, encoded version, triple





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F3K SRO3	Signal red	1	10.500	**6120326**

PC Polycarbonate


Socket with earthing pin triple 33°, encoded version, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1. The socket can only be used in conjunction with an encoding pin, type CST-STD.

Note: The encoding pin is not contained in the scope of supply.

Modul 45®, USB charging device

USB charging device





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-2UC2.1 RW1	Pure white	1	5.500	**6105300**
MTG-2UC2.1 SWGR1	Black-grey	1	5.500	**6105302**
MTG-2UC2.1 AL1	Aluminium painted	1	5.500	**6105304**

PC Polycarbonate

USB charging device with two USB type A sockets, for charging 1–2 mobile devices, maximum charging current 1 x 2,100 mA or 2 x 1,050 mA.

Always indicate the item number when ordering.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

One-way/changeover switch, 1/2 module

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WS-UB RW0.5	Pure white	1	1.800	**6120920**
WS-UB SWGR0.5	Black-grey	1	1.800	**6120922**
WS-UB AL0.5	Aluminium painted	1	1.800	**6120924**

PC Polycarbonate

Changeover switch 1-pin, 10 A, 250 V~, with screwless terminals.






One-way/changeover switch with warning lamp, 1/2 module

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WS-UKL RW0.5	Pure white	1	1.800	**6120926**
WS-UKL SWGR0.5	Black-grey	1	1.800	**6120928**
WS-UKL AL0.5	Aluminium painted	1	1.800	**6120930**

PC Polycarbonate

Changeover switch with LED element as control luminaire, 1-pole, 10 A, 250 V~, with screwless terminals.






One-way/changeover switch, 1 module

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WS-UB RW1	Pure white	1	2.600	**6120932**
WS-UB SWGR1	Black-grey	1	2.600	**6120934**
WS-UB AL1	Aluminium painted	1	2.300	**6120936**

PC Polycarbonate

Changeover switch 1-pin, 10 A, 250 V~, with screwless terminals.






One-way/changeover switch with warning lamp, 1 module

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
WS-UKL RW1	Pure white	1	2.300	**6120938**
WS-UKL SWGR1	Black-grey	1	2.300	**6120940**
WS-UKL AL1	Aluminium painted	1	2.300	**6120942**

PC Polycarbonate

Changeover switch with LED element as control luminaire, 1-pole, 10 A, 250 V~, with screwless terminals.






Roller blind switch, 1 module

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
RS-BS RW1	Pure white	1	3.700	**6120950**
RS-BS SWGR1	Black-grey	1	3.700	**6120952**
RS-BS AL1	Aluminium painted	1	3.700	**6120954**

PC Polycarbonate

Roller blind switch with electrical and mechanical lock, 1-pin, 10 A, 250 V~, with screwless terminals.






Changeover switch, 1/2 module

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
TA-WB RW0.5	Pure white	1	1.800	**6120960**
TA-WB SWGR0.5	Black-grey	1	1.800	**6120962**
TA-WB AL0.5	Aluminium painted	1	1.800	**6120964**

PC Polycarbonate

Changeover switch, 1-pin, 10 A, 250 V~, with screwless terminals.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Modul 45®, switches and push-buttons

Changeover switch, 1 module






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
TA-WB RW1	Pure white	1	3.300	**6120966**
TA-WB SWGR1	Black-grey	1	3.300	**6120968**
TA-WB AL1	Aluminium painted	1	3.300	**6120970**

PC Polycarbonate

Changeover switch, 1-pin, 10 A , 250 V~, with screwless terminals.

Roller blind button, 1 module







Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
RT-BS RW1	Pure white	1	3.700	**6120980**
RT-BS SWGR1	Black-grey	1	3.700	**6120982**
RT-BS AL1	Aluminium painted	1	3.700	**6120984**

PC Polycarbonate

Roller blind button with electrical locking, 1-pin, 10 A, 250 V~, with screwless terminals.

Adapter for switch installation rotated through 90°





Type	Pack. pcs	Weight kg/100 pcs.	Item No.
AD-90G M45-1	1	2.200	**6120992**


St Steel

The adapter allows switch installation rotated through 90° in, for example, service poles with a 45 mm track or Rapid 45. Suitable for all switches and buttons in one module width (45 x 45 mm).

Modul 45®, data technology solution Cat. 5 / Cat. 6

Data technology support, 1 module, straight outlet, type RM






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTG-2RM RW1	Pure white	1	1.100	**6119292**
DTG-2RM SWGR1	Black-grey	1	1.100	**6119294**
DTG-2RM AL1	Aluminium painted	1	1.100	**6119296**

PC Polycarbonate

The type RM data technology support is suitable for accepting the following data connection modules: Types ASM-C5, ASM-C5 G, ASM-C6 and ASM-C6 G; R&M: Cat.5 and Cat.6 modules without support plate.

Data technology support, 1 module, slanting outlet, type RM






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTS-2RM RW1	Pure white	1	2.900	**6119298**
DTS-2RM SWGR1	Black-grey	1	2.900	**6119300**
DTS-2RM AL1	Aluminium painted	1	2.900	**6119302**

PC Polycarbonate

The type RM data technology support is suitable for accepting the following data connection modules: Types ASM-C5, ASM-C5 G, ASM-C6 and ASM-C6 G; R&M: Cat.5 and Cat.6 modules without support plate.

RJ45 data connection module, Cat. 5e, unshielded





Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ASM-C5	1	1.120	**6117337**

Connection module Cat. 5e unshielded, with a RJ 45 slot. Including a dust cover, a cable tie and mounting instructions. Suitable for installation in data technology supports of type DTG-2RM and DTS-2RM.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

RJ45 data connection module, Cat. 5e, shielded

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ASM-C5 G	1	2.660	**6117325**

Connection module Cat. 5e shielded, with a RJ 45 slot. Includes an EMC screen hood, a dust cover, a cable tie and mounting instructions. Suitable for installation in data technology supports of type DTG-2RM and DTS-2RM.






RJ45 data connection module, Cat. 6, unshielded

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ASM-C6	1	1.060	**6117341**

Connection module Cat. 6 unshielded, with a RJ 45 slot. Including a dust cover, a cable tie and mounting instructions. Suitable for installation in data technology supports of type DTG-2RM and DTS-2RM.






RJ45 data connection module, Cat. 6, shielded

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ASM-C6 G	1	1.850	**6117329**

Connection module Cat. 6 shielded, with a RJ 45 slot. Includes an EMC screen hood, a dust cover, a cable tie and mounting instructions. Suitable for installation in data technology supports of type DTG-2RM and DTS-2RM.






Data technology support, 1 module, straight outlet, type C

Type	Colour	Pack. pcs	Item No.
DTG-2C RW1	Pure white	1	**6119214**
DTG-2C SWGR1	Black-grey	1	**6119216**
DTG-2C AL1	Aluminium painted	1	**6119218**

PC Polycarbonate

The type C data technology support is suitable for accepting the following data connection modules: BTR (Keystone design): Cat. 6A module and UAE module; Corning: modules with Keystone seat; CobiNet: CobiDat KS module; Dätwyler: KS-T, KS-TS, MS-K and KU-T; EKU: E-Stone; Harting: Prelink Keystone Cat. 6A; Fixlink Keystone Cat. 6A; Komos: KDM 500 module; Leoni Kerpen: MegaLine-Connect45 Keystone socket modules; OBO: Type ASM-C6A and ASM-C6A G; R&M: Cat. 6A with Keystone fastening; Rutenbeck: UM and UMflex; SETEC: UKJ and XKJ; Telegärtner: AMJ and UMJ.

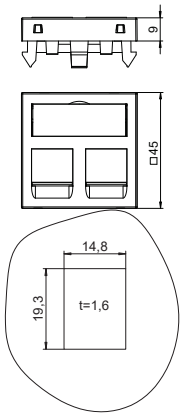




Data technology support, 1 module, slanting outlet, type C

Type	Colour	Pack. pcs	Item No.
DTS-2C RW1	Pure white	1	**6119250**
DTS-2C SWGR1	Black-grey	1	**6119252**
DTS-2C AL1	Aluminium painted	1	**6119254**

PC Polycarbonate

The type C data technology support is suitable for accepting the following data connection modules: BTR (Keystone design): Cat. 6A module and UAE module; Corning: modules with Keystone seat; CobiNet: CobiDat KS module; Dätwyler: KS-T, KS-TS, MS-K and KU-T; EKU: E-Stone; Harting: Prelink Keystone Cat. 6A; Fixlink Keystone Cat. 6A; Komos: KDM 500 module; Leoni Kerpen: MegaLine-Connect45 Keystone socket modules; OBO: Type ASM-C6A and ASM-C6A G; R&M: Cat. 6A with Keystone fastening; Rutenbeck: UM and UMflex; SETEC: UKJ and XKJ; Telegärtner: AMJ and UMJ.

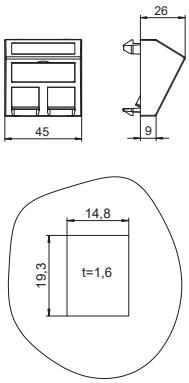




Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Modul 45®, data technology solution Cat. 6A

Connection module Cat. 6A, unshielded, snap-in






Type	Pack. pcs	Item No.
ASM-C6A	1	6117348

Connection module Cat. 6A (ISO) unshielded, with an RJ45 slot. Including a dust cover, a cable tie, a Keystone fastening frame and mounting instructions. Suitable for installation in the data technology supports of type DTG-2C and DTS-2C, support plate of type MTM 2C and MTM 3C, mounting plate of type MPR2 2C, mounting supports of type MTGE2 2C, MTGE2 15 2C and MTGE2 F 2C.

Connection module Cat. 6A, shielded, snap-in






Type	Pack. pcs	Item No.
ASM-C6A G	1	6117346

Connection module Cat. 6A (ISO) shielded, with an RJ45 slot. Including an EMC screen hood, a dust cover, a cable tie, a Keystone fastening frame and mounting instructions. Suitable for installation in the data technology supports of type DTG-2C and DTS-2C, support plate of type MTM 2C and MTM 3C, mounting plate of type MPR2 2C, mounting supports of type MTGE2 2C, MTGE2 15 2C and MTGE2 F 2C.

Snap-in, data technology solution Cat. 5 / Cat. 6 for metal supports

Connection module Cat. 5, unshielded, snap-in






Type	Pack. pcs	Item No.
ASM-C5 S	1	6117347

Connection module Cat. 5e unshielded, with a RJ45 slot. Including a dust cover, a cable tie, a snap-in fastening frame and mounting instructions. Suitable for installation in support plates, type MTM 2C and MTM 3C, mounting plate type MPR2 2C, mounting support type MTGE2 2C, MTGE2 15 2C and MTGE2 F 2C.

Modul 45®, universal data technology support

Data technology support, 1 module, straight outlet, type A





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTG-2A RW1	Pure white	1	1.100	6119202
DTG-2A SWGR1	Black-grey	1	1.100	6119204
DTG-2A AL1	Aluminium painted	1	1.100	6119206

PC Polycarbonate

Data technology support with straight outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type A has a mounting opening of 20.10 x 14.80 mm and is designed for direct fastening of the data connection modules in the mounting opening.

The Type A data technology support is suitable for accepting the following data connection modules: AMP TYCO (without dust protection cap): SL Series 110Connect and SL Series Toolless; Brand-Rex: modules with item numbers ending in …JAKS000CR and …JAKU002; Nexans: LANmark RJ45 with blue adapter clip, LANmark GG45 with metal clip.

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


Data technology support, 1 module, slanting outlet, type A

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTS-2A RW1	Pure white	1	2.000	**6119238**
DTS-2A SWGR1	Black-grey	1	1.500	**6119240**
DTS-2A AL1	Aluminium painted	1	1.500	**6119242**


PC Polycarbonate

Data technology support with slanting outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type A has a mounting opening of 20.10 x 14.80 mm and is designed for direct fastening of the data connection modules in the mounting opening.

The Type A data technology support is suitable for accepting the following data connection modules: AMP TYCO (without dust protection cap): SL Series 110Connect and SL Series Toolless; Brand-Rex: modules with item numbers ending in …JAKS000CR and …JAKU002; Nexans: LANmark RJ45 with blue adapter clip, LANmark GG45 with metal clip.








Data technology support, 1 module, straight outlet, type B

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTG-2B RW1	Pure white	1	1.100	**6119208**
DTG-2B SWGR1	Black-grey	1	1.100	**6119210**
DTG-2B AL1	Aluminium painted	1	1.100	**6119212**

PC Polycarbonate

Data technology support with straight outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type B has a mounting opening of 19.35/21.55 x 14.85 mm and is designed for direct fastening of the data connection modules in the mounting opening.

The type B data technology support is suitable for accepting the following data connection modules: BTR (module design): Cat. 6A Modul, E-DAT module and UAE module; Dätwyler: MS and MS-N, Leoni Kerpen: VarioKeystone socket module Cat. 6A and MegaLine-Connect100 socket module Cat. 6A and 8C7A.






Data technology support, 1 module, slanting outlet, type B

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTS-2B RW1	Pure white	1	1.500	**6119244**
DTS-2B SWGR1	Black-grey	1	1.500	**6119246**
DTS-2B AL1	Aluminium painted	1	1.500	**6119248**


PC Polycarbonate

Data technology support with slanting outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type B has a mounting opening of 19.35/21.55 x 14.85 mm and is designed for direct fastening of the data connection modules in the mounting opening.

The type B data technology support is suitable for accepting the following data connection modules: BTR (module design): Cat. 6A Modul, E-DAT module and UAE module; Dätwyler: MS and MS-N, Leoni Kerpen: VarioKeystone socket module Cat. 6A and MegaLine-Connect100 socket module Cat. 6A and 8C7A.








Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Data technology support, 1 module, straight outlet, type C





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTG-2C RW1	Pure white	1	1.100	**6119214**
DTG-2C SWGR1	Black-grey	1	1.100	**6119216**
DTG-2C AL1	Aluminium painted	1	1.100	**6119218**


PC Polycarbonate

Data technology support with straight outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type C has a mounting opening of 19.30 x 14.80 mm and is designed for direct fastening of the data connection modules in the mounting opening.

The type C data technology support is suitable for accepting the following data connection modules: BTR (Keystone design): Cat. 6A module and UAE module; Corning: modules with Keystone seat; CobiNet: CobiDat KS module; Dätwyler: KS-T, KS-TS, MS-K and KU-T; EKU: E-Stone; Harting: Prelink Keystone Cat. 6A; Fixlink Keystone Cat. 6A; Komos: KDM 500 module; Leoni Kerpen: MegaLine-Connect45 Keystone socket modules; OBO: Type ASM-C6A and ASM-C6A G; R&M: Cat. 6A with Keystone fastening; Rutenbeck: UM and UMflex; SETEC: UKJ and XKJ; Telegärtner: AMJ and UMJ.

Data technology support, 1 module, slanting outlet, type C



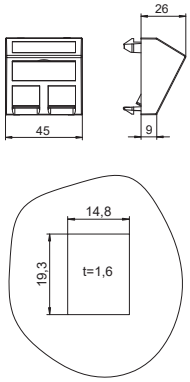

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTS-2C RW1	Pure white	1	1.500	**6119250**
DTS-2C SWGR1	Black-grey	1	1.500	**6119252**
DTS-2C AL1	Aluminium painted	1	1.500	**6119254**


PC Polycarbonate

Data technology support with slanting outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type C has a mounting opening of 19.30 x 14.80 mm and is designed for direct fastening of the data connection modules in the mounting opening.

The type C data technology support is suitable for accepting the following data connection modules: BTR (Keystone design): Cat. 6A module and UAE module; Corning: modules with Keystone seat; CobiNet: CobiDat KS module; Dätwyler: KS-T, KS-TS, MS-K and KU-T; EKU: E-Stone; Harting: Prelink Keystone Cat. 6A; Fixlink Keystone Cat. 6A; Komos: KDM 500 module; Leoni Kerpen: MegaLine-Connect45 Keystone socket modules; OBO: Type ASM-C6A and ASM-C6A G; R&M: Cat. 6A with Keystone fastening; Rutenbeck: UM and UMflex; SETEC: UKJ and XKJ; Telegärtner: AMJ and UMJ.

Data technology support, 1 module, straight outlet, type C, without dust protection slider





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTG-02C RW1	Pure white	1	1.000	**6119280**
DTG-02C SWGR1	Black-grey	1	1.000	**6119282**
DTG-02C AL1	Aluminium painted	1	1.000	**6119284**

PC Polycarbonate

Data technology support with straight outlet and without a locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type C has a mounting opening of 19.30 x 14.80 mm and is designed for direct fastening of the data connection modules in the mounting opening.

The type C data technology support (without dust protection slider) is suitable for accepting the following data connection modules: 3M: Volition K6, K10 and Cat. 6A.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.


Data technology support, 1 module, slanting outlet, type C, without dust protection slider

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTS-02C RW1	Pure white	1	1.400	**6119286**
DTS-02C SWGR1	Black-grey	1	1.400	**6119288**
DTS-02C AL1	Aluminium painted	1	1.400	**6119290**

PC Polycarbonate

Data technology support with slanting outlet and without a locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type C has a mounting opening of 19.30 x 14.80 mm and is designed for direct fastening of the data connection modules in the mounting opening.

The type C data technology support (without dust protection slider) is suitable for accepting the following data connection modules: 3M: Volition K6, K10 and Cat. 6A.






Data technology support, 1 module, straight outlet, type EP

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTG-2EP RW1	Pure white	1	1.100	**6119232**
DTG-2EP SWGR1	Black-grey	1	1.100	**6119234**
DTG-2EP AL1	Aluminium painted	1	1.100	**6119236**

PC Polycarbonate

Data technology support with straight outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type EP has a special module seat and is designed for indirect fastening of the data connection modules in the mounting opening.

The type EP data technology support is suitable for accepting the following data connection modules: Leoni Kerpen: MegaLine-Connect45 ELine.






Data technology support, 1 module, slanting outlet, type EP

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTS-2EP RW1	Pure white	1	1.500	**6119268**
DTS-2EP SWGR1	Black-grey	1	1.500	**6119270**
DTS-2EP AL1	Aluminium painted	1	1.500	**6119272**

PC Polycarbonate

Data technology support with slanting outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type EP has a special module seat and is designed for indirect fastening of the data connection modules in the mounting opening.

The type EP data technology support is suitable for accepting the following data connection modules: Leoni Kerpen: The type EP data technology support is suitable for accepting the following data connection modules: Leoni Kerpen: MegaLine-Connect45 ELine.






Data technology support, 1 module, straight outlet, type F

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTG-2F RW1	Pure white	1	1.100	**6119220**
DTG-2F SWGR1	Black-grey	1	1.100	**6119222**
DTG-2F AL1	Aluminium painted	1	1.100	**6119224**

PC Polycarbonate

Data technology support with straight outlet and locking slider to accept two data technology connection modules. The locking fastening is suitable for horizontal and vertical installation in the system environment.

The type F data technology support is suitable for accepting the following data connection modules: Avaya/Systimax: M series.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Data technology support, 1 module, slanting outlet, type F





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTS-2F RW1	Pure white	1	1.500	**6119256**
DTS-2F SWGR1	Black-grey	1	1.500	**6119258**
DTS-2F AL1	Aluminium painted	1	1.500	**6119260**


PC Polycarbonate

Data technology support with slanting outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type F has a special module seat and is designed for indirect fastening of the data connection modules in the mounting opening.

The type F data technology support is suitable for accepting the following data connection modules: Avaya/Systimax: M series.

Data technology support, 1 module, straight outlet, type PA





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTG-2PA RW1	Pure white	1	1.100	**6119226**
DTG-2PA SWGR1	Black-grey	1	1.100	**6119228**
DTG-2PA AL1	Aluminium painted	1	1.100	**6119230**


PC Polycarbonate

Data technology support with straight outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type PA has a special module seat and is designed for indirect fastening of the data connection modules in the mounting opening.

The type PA data technology support is suitable for accepting the following data connection modules: Panduit: Mini-Com.

Data technology support, 1 module, slanting outlet, type PA





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTS-2PA RW1	Pure white	1	1.500	**6119262**
DTS-2PA SWGR1	Black-grey	1	1.500	**6119264**
DTS-2PA AL1	Aluminium painted	1	1.500	**6119266**


PC Polycarbonate

Data technology support with slanting outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type PA has a special module seat and is designed for indirect fastening of the data connection modules in the mounting opening.

The type PA data technology support is suitable for accepting the following data connection modules: Panduit: Mini-Com.

Data technology support, 1 module, straight outlet, type RM





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTG-2RM RW1	Pure white	1	1.100	**6119292**
DTG-2RM SWGR1	Black-grey	1	1.100	**6119294**
DTG-2RM AL1	Aluminium painted	1	1.100	**6119296**

PC Polycarbonate

Data technology support with straight outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type RM has a special module seat and is designed for indirect fastening of the data connection modules in the mounting opening.

The type RM data technology support is suitable for accepting the following data connection modules: Types ASM-C5, ASM-C5 G, ASM-C6 and ASM-C6 G; R&M: Cat.5 and Cat.6 modules without support plate.


Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Data technology support, 1 module, slanting outlet, type RM

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTS-2RM RW1	Pure white	1	2.900	**6119298**
DTS-2RM SWGR1	Black-grey	1	2.900	**6119300**
DTS-2RM AL1	Aluminium painted	1	2.900	**6119302**

PC Polycarbonate






Data technology support with slanting outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type RM has a special module seat and is designed for indirect fastening of the data connection modules in the mounting opening.

The type RM data technology support is suitable for accepting the following data connection modules: Types ASM-C5, ASM-C5 G, ASM-C6 and ASM-C6 G; R&M: Cat.5 and Cat.6 modules without support plate.

Data technology support, 1 module, straight outlet, type LE

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTG-02LE RW1	Pure white	1	0.900	**6119304**
DTG-02LE SWGR1	Black-grey	1	0.900	**6119306**
DTG-02LE AL1	Aluminium painted	1	0.900	**6119308**

PC Polycarbonate






Data technology support with straight outlet and without a locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type LE has a special module seat and is designed for indirect fastening of the data connection modules in the mounting opening.

The type LE data technology support is suitable for accepting the following data connection modules: LexCom/Schneider: LexCom 125, LexCom 250 and LexCom 500.

Multimedia support for VGA / D-Sub9 plug connector, 1 module, straight outlet

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-DB O RW1	Pure white	1	0.700	**6104706**
MTG-DB O SWGR1	Black-grey	1	0.700	**6104709**
MTG-DB O AL1	Aluminium painted	1	0.700	**6104712**

PC Polycarbonate






Multimedia support for a VGA / D-Sub9 plug connector, straight cable outlet, with labelling panel, without plug connector. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Multimedia support for VGA / D-Sub9 plug connector, 1 module, slanting outlet

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-DB O RW1	Pure white	1	0.900	**6104718**
MTS-DB O SWGR1	Black-grey	1	0.900	**6104721**
MTS-DB O AL1	Aluminium painted	1	0.900	**6104724**

PC Polycarbonate





Multimedia support for a VGA / D-Sub9 plug connector, slanting cable outlet, with labelling panel, without plug connector. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Modul 45®, universal multimedia support

Multimedia support for DVI plug connector, 1 module, straight outlet






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-DV O RW1	Pure white	1	0.700	**6104778**
MTG-DV O SWGR1	Black-grey	1	0.700	**6104781**
MTG-DV O AL1	Aluminium painted	1	0.700	**6104784**

PC Polycarbonate

Multimedia support for a DVI plug connector, straight cable outlet, with labelling panel, without plug connector. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Multimedia support for DVI plug connector, 1 module, slanting outlet






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-DV O RW1	Pure white	1	0.900	**6104790**
MTS-DV O SWGR1	Black-grey	1	0.900	**6104793**
MTS-DV O AL1	Aluminium painted	1	0.900	**6104796**

PC Polycarbonate

Multimedia support for a DVI plug connector, slanting cable outlet, with labelling panel, without plug connector. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Multimedia support for SLR plug connector, 1 module, straight outlet





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-X O RW1	Pure white	1	0.600	**6105234**
MTG-X O SWGR1	Black-grey	1	0.600	**6105237**
MTG-X O AL1	Aluminium painted	1	0.600	**6105240**


PC Polycarbonate

Multimedia support for a XLR plug connector, straight cable outlet, without labelling panel, without plug connector. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Modul 45®, connection solutions for data transmission

D-Sub9 connection, 1 module, straight outlet, as screw connection






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-DB9 S RW1	Pure white	1	2.400	**6104634**
MTG-DB9 S SWGR1	Black-grey	1	2.400	**6104637**
MTG-DB9 S AL1	Aluminium painted	1	2.400	**6104640**

PC Polycarbonate

Multimedia support with one D-Sub9 connection socket, straight cable outlet, with labelling panel, D-Sub9 socket (RS232) with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

D-Sub9 connection, 1 module, slanting outlet, as screw connection





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-DB9 S RW1	Pure white	1	2.600	**6104646**
MTS-DB9 S SWGR1	Black-grey	1	2.600	**6104649**
MTS-DB9 S AL1	Aluminium painted	1	2.600	**6104652**

PC Polycarbonate

Multimedia support with one D-Sub9 connection socket, slanting cable outlet, with labelling panel, D-Sub9 socket (RS232) with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.

D-Sub9 connection, 1 module, straight outlet, with connection cable

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-DB9 F RW1	Pure white	1	5.200	**6104682**
MTG-DB9 F SWGR1	Black-grey	1	5.200	**6104685**
MTG-DB9 F AL1	Aluminium painted	1	5.200	**6104688**

PC Polycarbonate

Multimedia support with one D-Sub9 connection socket, straight cable outlet, with labelling panel, short D-Sub9 connection cable (RS232), socket-socket version. Support with locking fastening, suitable for horizontal and vertical installation in the system environment.






D-Sub9 connection, 1 module, slanting outlet, with connection cable

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-DB9 F RW1	Pure white	1	5.400	**6104694**
MTS-DB9 F SWGR1	Black-grey	1	5.400	**6104697**
MTS-DB9 F AL1	Aluminium painted	1	5.400	**6104700**

PC Polycarbonate

Multimedia support with one D-Sub9 connection socket, slanting cable outlet, with labelling panel, short D-Sub9 connection cable (RS232), socket-socket version. Support with locking fastening, suitable for horizontal and vertical installation in the system environment.






USB 2.0 / 3.0 connection, 1 module, straight outlet, as screw connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-U3A S RW1	Pure white	1	2.500	**6104874**
MTG-U3A S SWGR1	Black-grey	1	2.500	**6104877**
MTG-U3A S AL1	Aluminium painted	1	2.500	**6104880**

PC Polycarbonate

Multimedia support with one USB 3.0 connection socket, straight cable outlet, with labelling panel, USB 3.0 Type A socket with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






USB 2.0 / 3.0 connection, 1 module, slanting outlet, as screw connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-U3A S RW1	Pure white	1	2.700	**6104886**
MTS-U3A S SWGR1	Black-grey	1	2.700	**6104889**
MTS-U3A S AL1	Aluminium painted	1	2.700	**6104892**

PC Polycarbonate

Multimedia support with one USB 3.0 connection socket, slanting cable outlet, with labelling panel, USB 3.0 type A socket with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






USB 2.0 / 3.0 connection, 1 module, straight outlet, with connection cable

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-U3A F RW1	Pure white	1	6.000	**6104922**
MTG-U3A F SWGR1	Black-grey	1	6.000	**6104925**
MTG-U3A F AL1	Aluminium painted	1	6.000	**6104928**

PC Polycarbonate

Multimedia support with one USB 3.0 connection socket, straight cable outlet, with labelling panel, short USB 3.0 type A connection cable, socket-socket version. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Modul 45®, connection solutions for data transmission

USB 2.0 / 3.0 connection, 1 module, slanting outlet, with connection cable





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-U3A F RW1	Pure white	1	6.200	6104934
MTS-U3A F SWGR1	Black-grey	1	6.200	6104937
MTS-U3A F AL1	Aluminium painted	1	6.200	6104940


PC Polycarbonate

Multimedia support with one USB 3.0 connection socket, slanting cable outlet, with labelling panel, short USB 3.0 type A connection cable, socket-socket version. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Modul 45®, USB charging device

USB charging device





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-2UC2.1 RW1	Pure white	1	5.500	6105300
MTG-2UC2.1 AL1	Aluminium painted	1	5.500	6105304
MTG-2UC2.1 SWGR1	Black-grey	1	5.500	6105302


PC Polycarbonate

USB charging device with two USB type A sockets, for charging 1–2 mobile devices, maximum charging current 1 x 2,100 mA or 2 x 1,050 mA.

Modul 45®, digital video connection solutions

DVI-D connection, 1 module, straight outlet, as screw connection





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-DVI S RW1	Pure white	1	3.500	6104730
MTG-DVI S SWGR1	Black-grey	1	3.500	6104733
MTG-DVI S AL1	Aluminium painted	1	3.500	6104736


PC Polycarbonate

Multimedia support with one DVI-D connection socket, straight cable outlet, with labelling panel, DVI-D socket with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Note: Due to the device dimensions, device installation in Rapid 45 device installation trunking is not possible.

DVI-D connection, 1 module, slanting outlet, as screw connection






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-DVI S RW1	Pure white	1	3.700	6104742
MTS-DVI S SWGR1	Black-grey	1	3.700	6104745
MTS-DVI S AL1	Aluminium painted	1	3.700	6104748

PC Polycarbonate

Multimedia support with one DVI-D connection socket, slanting cable outlet, with labelling panel, DVI-D socket with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

DVI-I connection, 1 module, straight outlet, with connection cable





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-DVI F RW1	Pure white	1	6.000	6104754
MTG-DVI F SWGR1	Black-grey	1	6.000	6104757
MTG-DVI F AL1	Aluminium painted	1	6.000	6104760

PC Polycarbonate

Multimedia support with one DVI-I connection socket, straight cable outlet, with labelling panel, short DVI-I connection cable, socket-socket version. Support with locking fastening, suitable for horizontal and vertical installation in the system environment.

Always indicate the item number when ordering.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

DVI-I connection, 1 module, slanting outlet, with connection cable

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-DVI F RW1	Pure white	1	6.200	**6104766**
MTS-DVI F SWGR1	Black-grey	1	6.200	**6104769**
MTS-DVI F AL1	Aluminium painted	1	6.200	**6104772**

PC Polycarbonate

Multimedia support with one DVI-I connection socket, slanting cable outlet, with labelling panel, short DVI-I connection cable, socket-socket version. Support with locking fastening, suitable for horizontal and vertical installation in the system environment.






HDMI connection, 1 module, straight outlet, as screw connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-HD S RW1	Pure white	1	3.200	**6104802**
MTG-HD S SWGR1	Black-grey	1	3.200	**6104805**
MTG-HD S AL1	Aluminium painted	1	3.200	**6104808**

PC Polycarbonate

Multimedia support with one HDMI connection socket, straight cable outlet, with labelling panel, HDMI socket with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Note: Due to the device dimensions, device installation in Rapid 45 device installation ducts and ISSR..45 / ISSD..45 service poles is not possible.






HDMI connection, 1 module, slanting outlet, as screw connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-HD S RW1	Pure white	1	3.400	**6104814**
MTS-HD S SWGR1	Black-grey	1	3.400	**6104817**
MTS-HD S AL1	Aluminium painted	1	3.400	**6104820**

PC Polycarbonate

Multimedia support with one HDMI connection socket, slanting cable outlet, with labelling panel, HDMI socket with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






HDMI connection, 1 module, straight outlet, with connection cable

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-HD F RW1	Pure white	1	6.000	**6104826**
MTG-HD F SWGR1	Black-grey	1	6.000	**6104829**
MTG-HD F AL1	Aluminium painted	1	6.000	**6104832**

PC Polycarbonate

Multimedia support with one HDMI connection socket, straight cable outlet, with labelling panel, short HDMI connection cable, socket-socket version. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






HDMI connection, 1 module, slanting outlet, with connection cable

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-HD F RW1	Pure white	1	6.200	**6104838**
MTS-HD F SWGR1	Black-grey	1	6.200	**6104841**
MTS-HD F AL1	Aluminium painted	1	6.200	**6104844**

PC Polycarbonate

Multimedia support with one HDMI connection socket, slanting cable outlet, with labelling panel, short HDMI connection cable, socket-socket version. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

VGA connection, 1 module, straight outlet, as screw connection






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-VGA S RW1	Pure white	1	2.400	**6104610**
MTG-VGA S SWGR1	Black-grey	1	2.400	**6104613**
MTG-VGA S AL1	Aluminium painted	1	2.400	**6104616**

PC Polycarbonate

Multimedia support with one VGA connection socket, straight cable outlet, with labelling panel, VGA socket (HD15) with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

VGA connection, 1 module, slanting outlet, as screw connection






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-VGA S RW1	Pure white	1	2.600	**6104622**
MTS-VGA S SWGR1	Black-grey	1	2.600	**6104625**
MTS-VGA S AL1	Aluminium painted	1	2.600	**6104628**

PC Polycarbonate

Multimedia support with one VGA connection socket, slanting cable outlet, with labelling panel, VGA socket (HD15) with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

VGA connection, 1 module, straight outlet, with connection cable






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-VGA F RW1	Pure white	1	5.200	**6104658**
MTG-VGA F SWGR1	Black-grey	1	5.200	**6104661**
MTG-VGA F AL1	Aluminium painted	1	5.200	**6104664**

PC Polycarbonate

Multimedia support with one VGA connection socket, straight cable outlet, with labelling panel, short VGA connection cable (HD15), socket-socket version. Support with locking fastening, suitable for horizontal and vertical installation in the system environment.

VGA connection, 1 module, slanting outlet, with connection cable






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-VGA F RW1	Pure white	1	5.400	**6104670**
MTS-VGA F SWGR1	Black-grey	1	5.400	**6104673**
MTS-VGA F AL1	Aluminium painted	1	5.400	**6104676**

PC Polycarbonate

Multimedia support with one VGA connection socket, slanting cable outlet, with labelling panel, short VGA connection cable (HD15), socket-socket version. Support with locking fastening, suitable for horizontal and vertical installation in the system environment.

Mini jack connection, 1 module, straight outlet, as soldered connection





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-MK L RW1	Pure white	1	1.500	**6104946**
MTG-MK L SWGR1	Black-grey	1	1.500	**6104949**
MTG-MK L AL1	Aluminium painted	1	1.500	**6104952**

PC Polycarbonate

Multimedia support with one mini jack connection socket, straight cable outlet, with labelling panel, mini cinch socket (TRS 3.5 mm) with soldered connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.

Mini jack connection, 1 module, slanting outlet, as soldered connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-MK L RW1	Pure white	1	1.700	**6104958**
MTS-MK L SWGR1	Black-grey	1	1.700	**6104961**
MTS-MK L AL1	Aluminium painted	1	1.700	**6104964**

PC Polycarbonate

Multimedia support with one mini jack connection socket, slanting cable outlet, with labelling panel, mini cinch socket (TRS 3.5 mm) with soldered connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






Video cinch connection, 1 module, straight outlet, as soldered connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-R L RW1	Pure white	1	1.500	**6104970**
MTG-R L SWGR1	Black-grey	1	1.500	**6104973**
MTG-R L AL1	Aluminium painted	1	1.500	**6104976**

PC Polycarbonate

Multimedia support with one cinch connection socket for composite video, straight cable outlet, with labelling panel, cinch socket (RCA) with soldered connection, colour coding yellow. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






Video cinch connection, 1 module, slanting outlet, as soldered connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-R L RW1	Pure white	1	1.700	**6104982**
MTS-R L SWGR1	Black-grey	1	1.700	**6104985**
MTS-R L AL1	Aluminium painted	1	1.700	**6104988**

PC Polycarbonate

Multimedia support with one cinch connection socket for composite video, slanting cable outlet, with labelling panel, cinch socket (RCA) with soldered connection, colour coding yellow. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






Video cinch connection, 1 module, straight outlet, as 1:1 coupling

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-R F RW1	Pure white	1	1.500	**6104994**
MTG-R F SWGR1	Black-grey	1	1.500	**6104997**
MTG-R F AL1	Aluminium painted	1	1.500	**6105000**

PC Polycarbonate

Multimedia support with one cinch connection socket for composite video, straight cable outlet, with labelling panel, cinch coupling (RCA), socket-socket version, colour coding yellow. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






Video cinch connection, 1 module, slanting outlet, as 1:1 coupling

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-R F RW1	Pure white	1	1.700	**6105006**
MTS-R F SWGR1	Black-grey	1	1.700	**6105009**
MTS-R F AL1	Aluminium painted	1	1.700	**6105012**

PC Polycarbonate

Multimedia support with one cinch connection socket for composite video, slanting cable outlet, with labelling panel, cinch coupling (RCA), socket-socket version, colour coding yellow. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Audio cinch connection, 1 module, straight outlet, as soldered connection






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-2R L RW1	Pure white	1	2.500	**6105042**
MTG-2R L SWGR1	Black-grey	1	2.500	**6105045**
MTG-2R L AL1	Aluminium painted	1	2.500	**6105048**

PC Polycarbonate

Multimedia support with two cinch connection sockets for audio R/L, straight cable outlet, with labelling panel, two cinch sockets (RCA) with soldered connection, colour coding red/white. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Audio cinch connection, 1 module, slanting outlet, as soldered connection






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-2R L RW1	Pure white	1	2.700	**6105054**
MTS-2R L SWGR1	Black-grey	1	2.700	**6105057**
MTS-2R L AL1	Aluminium painted	1	2.700	**6105060**

PC Polycarbonate

Multimedia support with two cinch connection sockets for audio R/L, slanting cable outlet, with labelling panel, two cinch sockets (RCA) with soldered connection, colour coding red/white. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Audio cinch connection, 1 module, straight outlet, as 1:1 coupling






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-2R F RW1	Pure white	1	2.500	**6105066**
MTG-2R F SWGR1	Black-grey	1	2.500	**6105069**
MTG-2R F AL1	Aluminium painted	1	2.500	**6105072**

PC Polycarbonate

Multimedia support with two cinch connection sockets for audio R/L, straight cable outlet, with labelling panel, two cinch couplings (RCA), socket-socket version, colour coding red/white. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Audio cinch connection, 1 module, slanting outlet, as 1:1 coupling






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-2R F RW1	Pure white	1	2.700	**6105078**
MTS-2R F SWGR1	Black-grey	1	2.700	**6105081**
MTS-2R F AL1	Aluminium painted	1	2.700	**6105084**

PC Polycarbonate

Multimedia support with two cinch connection sockets for audio R/L, slanting cable outlet, with labelling panel, two cinch couplings (RCA), socket-socket version, colour coding red/white. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Component video connection, 1 module, straight outlet, as soldered connection





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-3R L RW1	Pure white	1	3.200	**6105114**
MTG-3R L SWGR1	Black-grey	1	3.200	**6105117**
MTG-3R L AL1	Aluminium painted	1	3.200	**6105120**

PC Polycarbonate

Multimedia support with three cinch connection sockets for component video, straight cable outlet, with labelling panel, three cinch sockets (RCA) with soldered connection, colour coding red / green / blue. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Component video connection, 1 module, slanting outlet, as soldered connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-3R L RW1	Pure white	1	3.400	**6105126**
MTS-3R L SWGR1	Black-grey	1	3.400	**6105129**
MTS-3R L AL1	Aluminium painted	1	3.400	**6105132**

PC Polycarbonate

Multimedia support with three cinch connection sockets for component video, slanting cable outlet, with labelling panel, three cinch sockets (RCA) with soldered connection, colour coding red / green / blue. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






Component video connection, 1 module, straight outlet, as 1:1 coupling

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-3R F RW1	Pure white	1	3.200	**6105138**
MTG-3R F SWGR1	Black-grey	1	3.200	**6105141**
MTG-3R F AL1	Aluminium painted	1	3.200	**6105144**

PC Polycarbonate

Multimedia support with three cinch connection sockets for component video, straight cable outlet, with labelling panel, three cinch couplings (RCA), socket-socket version, colour coding red / green / blue. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






Component video connection, 1 module, slanting outlet, as 1:1 coupling

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-3R F RW1	Pure white	1	3.400	**6105150**
MTS-3R F SWGR1	Black-grey	1	3.400	**6105153**
MTS-3R F AL1	Aluminium painted	1	3.400	**6105156**

PC Polycarbonate

Multimedia support with three cinch connection sockets for component video, slanting cable outlet, with labelling panel, three cinch couplings (RCA), socket-socket version, colour coding red / green / blue. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






Audio/video cinch connection, 1 module, straight outlet, as soldered connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-12R L RW1	Pure white	1	3.200	**6105162**
MTG-12R L SWGR1	Black-grey	1	3.200	**6105165**
MTG-12R L AL1	Aluminium painted	1	3.200	**6105168**

PC Polycarbonate

Multimedia support with three cinch connection sockets for audio-video, straight cable outlet, with labelling panel, three cinch sockets (RCA) with soldered connection, colour coding yellow / red / white. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Audio/video cinch connection, 1 module, slanting outlet, as soldered connection






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-12R L RW1	Pure white	1	3.400	**6105174**
MTS-12R L SWGR1	Black-grey	1	3.400	**6105177**
MTS-12R L AL1	Aluminium painted	1	3.400	**6105180**

PC Polycarbonate

Multimedia support with three cinch connection sockets for audio/video, slanting cable outlet, with labelling panel, three cinch sockets (RCA) with soldered connection, colour coding yellow / red / white. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Audio/video cinch connection, 1 module, straight outlet, as 1:1 coupling






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-12R F RW1	Pure white	1	3.200	**6105186**
MTG-12R F SWGR1	Black-grey	1	3.200	**6105189**
MTG-12R F AL1	Aluminium painted	1	3.200	**6105192**

PC Polycarbonate

Multimedia support with three cinch connection sockets for audio/video, straight cable outlet, with labelling panel, three cinch couplings (RCA), socket-socket version, colour coding yellow / red / white. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Audio/video cinch connection, 1 module, slanting outlet, as 1:1 coupling






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-12R F RW1	Pure white	1	3.400	**6105198**
MTS-12R F SWGR1	Black-grey	1	3.400	**6105201**
MTS-12R F AL1	Aluminium painted	1	3.400	**6105204**

PC Polycarbonate

Multimedia support with three cinch connection sockets for audio/video, slanting cable outlet, with labelling panel, three cinch couplings (RCA), socket-socket version, colour coding yellow / red / white. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

XLR connection, 1 module, straight outlet, 3-pin socket, as soldered connection






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-X3F L RW1	Pure white	1	3.000	**6105210**
MTG-X3F L SWGR1	Black-grey	1	3.000	**6105213**
MTG-X3F L AL1	Aluminium painted	1	3.000	**6105216**

PC Polycarbonate

Multimedia support with one XLR connection socket, straight cable outlet, without labelling panel, 3-pin XLR socket with soldered connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

XLR connection, 1 module, straight outlet, 3-pin connector, as soldered connection





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-X3M L RW1	Pure white	1	3.000	**6105222**
MTG-X3M L SWGR1	Black-grey	1	3.000	**6105225**
MTG-X3M L AL1	Aluminium painted	1	3.000	**6105228**

PC Polycarbonate

Multimedia support with one XLR connection socket, straight cable outlet, without labelling panel, 3-pin XLR connector with soldered connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

XLR connection, 1 module, straight outlet, 3-pin socket, as screw connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-X3F S RW1	Pure white	1	3.500	6105250
MTG-X3F S SWGR1	Black-grey	1	3.500	6105252
MTG-X3F S AL1	Aluminium painted	1	3.500	6105254

PC Polycarbonate

Multimedia support with one XLR connection socket, straight cable outlet, without labelling panel, XLR 3-pin socket with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






XLR connection, 1 module, straight outlet, 3-pin connection, as screw connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-X3M S RW1	Pure white	1	3.500	6105258
MTG-X3M S SWGR1	Black-grey	1	3.500	6105260
MTG-X3M S AL1	Aluminium painted	1	3.500	6105262

PC Polycarbonate

Multimedia support with one XLR connection socket, straight cable outlet, without labelling panel, XLR 3-pin socket with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






Speakon connection, 1 module, straight outlet, 4-pin socket, as screw connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-SON S RW1	Pure white	1	2.800	6105270
MTG-SON S SWGR1	Black-grey	1	2.800	6105272
MTG-SON S AL1	Aluminium painted	1	2.800	6105274

PC Polycarbonate

Multimedia support with one Speakon connection socket, straight cable outlet, without labelling panel, Speakon 4-pin socket with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






BNC connection, 1 module, straight outlet, as 1:1 coupling

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-BC F RW1	Pure white	1	1.500	6105018
MTG-BC F SWGR1	Black-grey	1	1.500	6105021
MTG-BC F AL1	Aluminium painted	1	1.500	6105024

PC Polycarbonate

Multimedia support with one BNC connection socket, straight cable outlet, with labelling panel, BNC cinch coupling, socket-socket version. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






BNC connection, 1 module, slanting outlet, as 1:1 coupling

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-BC F RW1	Pure white	1	1.700	6105030
MTS-BC F SWGR1	Black-grey	1	1.700	6105033
MTS-BC F AL1	Aluminium painted	1	1.700	6105036

PC Polycarbonate

Multimedia support with one BNC connection socket, slanting cable outlet, with labelling panel, BNC cinch coupling, socket-socket version. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Modul 45®, analogue audio/video connection solutions

2 x BNC connection, 1 module, straight outlet, as 1:1 coupling






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-2BC F RW1	Pure white	1	2.500	**6105090**
MTG-2BC F SWGR1	Black-grey	1	2.500	**6105093**
MTG-2BC F AL1	Aluminium painted	1	2.500	**6105096**

PC Polycarbonate

Multimedia support with two BNC connection sockets, straight cable outlet, with labelling panel, two BNC couplings, socket-socket version. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

2 x BNC connection, 1 module, slanting outlet, as 1:1 coupling






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-2BC F RW1	Pure white	1	2.700	**6105102**
MTS-2BC F SWGR1	Black-grey	1	2.700	**6105105**
MTS-2BC F AL1	Aluminium painted	1	2.700	**6105108**

PC Polycarbonate

Multimedia support with two BNC connection sockets, slanting cable outlet, with labelling panel, two BNC couplings, socket-socket version. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Antenna connection, 1 module, TV / radio / SAT, antenna socket





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ANT-3SD RW1	Pure white	1	11.596	**6105282**
ANT-3SD AL1	Aluminium painted	1	11.000	**6105286**


PC Polycarbonate


Socket for antenna, BK and satellite reception systems with connection for TV and radio.

Frequency: 5–2150 MHz
Heat attenuation: 5-862 MHz - 1dB
950-2150 MHz - 2 dB
Return channel attenuation: 14 dB
EMC protection class A

Modul 45®, installation components

Equipotential bonding socket, 1 module, straight outlet






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
PAD-ID6 RW1	Pure white	1	5.000	**6120003**
PAD-ID6 SWGR1	Black-grey	1	5.000	**6120001**
PAD-ID6 AL1	Aluminium painted	1	5.000	**6120005**

PC Polycarbonate

Equipotential bonding socket to DIN 42801, socket in black with green-yellow colour ring, cable connection to rear with M6 screw bolt, including two nuts, washers and a serrated washer.

Cable outlet for 3–11 mm cross-section





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
KAL-K11 RW1	Pure white	1	3.500	**6117420**
KAL-K11 SWGR1	Black-grey	1	3.500	**6117421**
KAL-K11 AL1	Aluminium painted	1	3.500	**6117422**

PC Polycarbonate

Two-part cable outlet with labelling panel, consisting of a cable support with strain relief and a cover. The strain relief is suited for cable cross-sections of 3 to 11 mm. The locking fastening is suitable for horizontal and vertical installation in the system environment.

Always indicate the item number when ordering.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Blanking cover with labelling panel, 1/2 module

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ADP-BF RW0.5	Pure white	1	0.400	**6117410**
ADP-BF SWGR0.5	Black-grey	1	0.400	**6117411**
ADP-BF AL0.5	Aluminium painted	1	0.400	**6117412**

PC Polycarbonate

Blanking cover with labelling panel, suited for labelling devices in Rapid 45 device installation trunking systems and ISS service poles with a 45 mm system opening.






Blanking cover, 1/2 module

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ADP-B RW0.5	Pure white	10	0.400	**6117414**
ADP-B SWGR0.5	Black-grey	10	0.400	**6117415**
ADP-B AL0.5	Aluminium painted	1	0.400	**6117416**


Blanking cover for closing off empty spaces for a half device (1/2 module).



Blanking cover, 1 module

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ADP-B RW1	Pure white	10	0.800	**6117406**
ADP-B SWGR1	Black-grey	10	0.800	**6117407**
ADP-B AL1	Aluminium painted	1	0.800	**6117408**

Blanking cover for closing off empty spaces for a device (one module).





Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Surface-mounted housing





Modul 45® – device installation solutions for surface and concealed mounting

The Modal net system is designed for the installation of Modul 45 devices and can be used for surface-mounted or cavity wall installations. The installation housing, which has a modular structure, can also be easily adjusted to the required number of installation devices. The basic configuration offers space for 4 Modul 45 installation devices. The housing can be expanded as required using an expansion module for 2 Modul 45 installation devices.

For installations in cavity walls, matching cavity wall supports and screen frames are available as accessories. Installations with 4 devices (2x 2x) and 6 installation devices (3x 2x) are possible.






Cavity wall installation

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

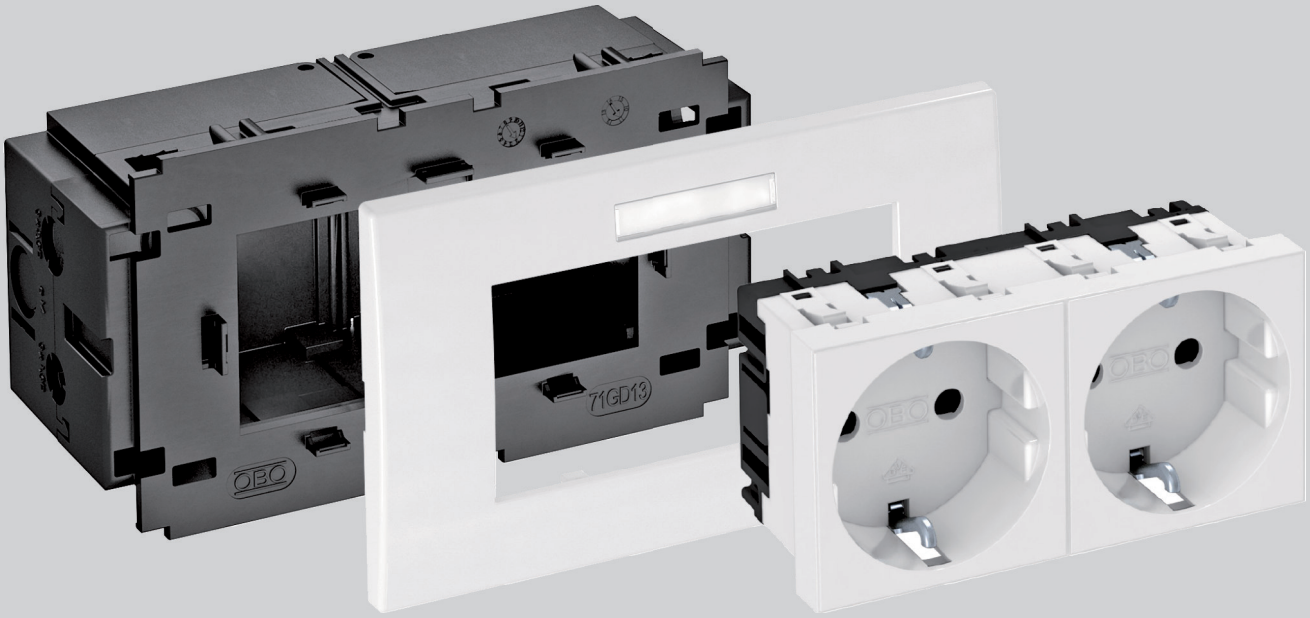

Modul 45® and standard

Installation solutions for device installation ducts and service poles with 80 mm system opening

The Modul 45 devices from OBO Bettermann are compact and space-saving. They are therefore ideal for use in device installation ducts and service poles. The Modul 45 system makes optimum use of limited installation space.

The advantages of Modul 45 at a glance:

- Space savings thanks to compact design
- Modular structure
- Quick and easy planning
- Simple mounting
- High efficiency due to time and cost savings
- Wide range of application options
- Easy exchangeability



Rapid 45



Rapid 80



Service poles


Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/22 18:28:44 18:28:44 (LLExport_02579) / 2019/04/22

Preterminated socket units

Accessory mounting box CEE, 16 A






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
CEE16E2	Iron grey	1	34.110	6288612

PA Polyamide

Accessory mounting box, complete, for the installation of a CEE connection device in device installation trunking with 80 mm cover, consisting of:
- Front locking device installation trunking
- CEE connection unit and mounting material
- CEE socket 16 A

Socket unit CEE, single, 16 A






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GDCEE16	Graphite black	1	31.100	6119483

PA Polyamide

Accessory mounting box for the installation of a 3 or 5-pole CEE socket, 16 A or 32 A.
Scope of delivery:
- 1 front-locking accessory mounting box for 4-point fastening track of 52 x 52 mm to 70 x 70 mm
- 1 cover frame in pure white for hiding the fastening technology
- 2 external strain reliefs for jacketed cables of up to Ø 18 mm
- 2 sash locks for optional fastening to trunking bases with C rail
- 1 CEE socket 16 A with mounting accessories

Socket unit CEE, single, 32 A





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GDCEE32	Graphite black	1	37.200	6119485


PA Polyamide

Accessory mounting box for the installation of a 3 or 5-pole CEE socket, 16 A or 32 A.
Scope of delivery:
- 1 front-locking accessory mounting box for 4-point fastening track of 52 x 52 mm to 70 x 70 mm
- 1 cover frame in pure white for hiding the fastening technology
- 2 external strain reliefs for jacketed cables of up to Ø 18 mm
- 2 sash locks for optional fastening to trunking bases with C rail
- 1 CEE socket 32 A with mounting accessories

Modul 45®, device installation solution, single

Service outlet, single, Modul 45®






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD8-2	Iron grey	1	5.900	6288569

PA Polyamide

Front locking single accessory mounting box for Modul 45 system, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.

Cover frame AR45, single



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
AR45-F1 RW	Pure white	1	1.600	6119322
AR45-F1 SWGR	Black-grey	1	1.600	6119324
AR45-F1 AL	Aluminium painted	1	1.600	6119326

PC Polycarbonate

Front locking cover frame for Modul 45 devices, single, without labelling panel for horizontal and vertical device installation, for locking in accessory mounting box 71GD8-2.

Always indicate the item number when ordering.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/22 18:28:44 (LLExport_02579) / 2019/04/22

Cover frame AR45, single, with labelling panel for horizontal device installation

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
AR45-BF1 RW	Pure white	1	1.500	**6119332**
AR45-BF1 SWGR	Black-grey	1	1.500	**6119334**
AR45-BF1 AL	Aluminium painted	1	1.500	**6119336**

PC Polycarbonate

Front locking cover frame for Modul 45 devices, single, with labelling panel for horizontal device installation, for locking in accessory mounting box 71GD8-2.




Cover frame AR45, single, with labelling panel for vertical device installation

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
AR45-BSF1 RW	Pure white	1	1.500	**6119338**
AR45-BSF1 SWGR	Black-grey	1	1.500	**6119339**
AR45-BSF1 AL	Aluminium painted	1	1.500	**6119340**

PC Polycarbonate

Front locking cover frame for Modul 45 devices, single, with labelling panel for vertical device installation, for locking in accessory mounting box 71GD8-2.





Service outlet, double, Modul 45®

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD13	1	11.000	**6288583**

PA Polyamide

Front locking double accessory mounting box for Modul 45 system, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.






Cover frame AR45, double

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
AR45-F2 RW	Pure white	1	2.320	**6119342**
AR45-F2 SWGR	Black-grey	1	2.320	**6119344**
AR45-F2 AL	Aluminium painted	1	2.320	**6119346**

PC Polycarbonate

Front locking cover frame for Modul 45 devices, single, without labelling panel for horizontal and vertical device installation, for locking in accessory mounting box 71GD13 or in mounting support 71MT2 45.




Cover frame AR45, double, with labelling panel for horizontal device installation

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
AR45-BF2 RW	Pure white	1	2.260	**6119352**
AR45-BF2 SWGR	Black-grey	1	2.260	**6119354**
AR45-BF2 AL	Aluminium painted	1	2.260	**6119356**

PC Polycarbonate

Front locking cover frame for Modul 45 devices, double, with labelling panel for horizontal device installation, for locking in accessory mounting box 71GD13 or in mounting support 71MT2 45.




Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/22 18:28:44 (LLExport_02579) / 2019/04/22

Always indicate the item number when ordering.

Modul 45®, device installation solution, double

Cover frame AR45, double, with labelling panel for vertical device installation




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
AR45-BSF2 RW	Pure white	1	2.260	**6119362**
AR45-BSF2 SWGR	Black-grey	1	2.260	**6119364**
AR45-BSF2 AL	Aluminium painted	1	2.260	**6119366**


PC Polycarbonate

Front locking cover frame for Modul 45 devices, double, with labelling panel for vertical device installation, for locking in accessory mounting box 71GD13 or in mounting support 71MT2 45.

Modul 45®, device installation solution, triple

Service outlet, triple, Modul 45®






Type	Designation	Pack. pcs	Weight kg/100 pcs.	Item No.
71GD9-2	Accessory mounting box	1	11.600	**6288579**

PA Polyamide

Front locking triple accessory mounting box for Modul 45 system, with folding, and also removable, base for time saving cable connection, with feed openings for cable diameters of up to 14 mm.

Cover frame AR45, triple




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
AR45-F3 RW	Pure white	1	2.800	**6119372**
AR45-F3 SWGR	Black-grey	1	2.800	**6119374**
AR45-F3 AL	Aluminium painted	1	2.800	**6119376**

PC Polycarbonate

Front locking cover frame for Modul 45 devices, triple, without labelling panel for horizontal and vertical device installation, for locking in accessory mounting box 71GD9-2 or in mounting support 71MT3 45-2.

Cover frame AR45, triple, with labelling panel for horizontal device installation




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
AR45-BF3 RW	Pure white	1	2.800	**6119382**
AR45-BF3 SWGR	Black-grey	1	2.800	**6119384**
AR45-BF3 AL	Aluminium painted	1	2.800	**6119386**

PC Polycarbonate

Front locking cover frame for Modul 45 devices, triple, with labelling panel for horizontal device installation, for locking in accessory mounting box 71GD9-2 or in mounting support 71MT3 45-2.

Cover frame AR45, triple, with labelling panel for vertical device installation



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
AR45-BSF3 RW	Pure white	1	2.800	**6119387**
AR45-BSF3 SWGR	Black-grey	1	2.800	**6119388**
AR45-BSF3 AL	Aluminium painted	1	2.800	**6119389**

PC Polycarbonate

Front locking cover frame for Modul 45 devices, triple, with labelling panel for vertical device installation, for locking in accessory mounting box 71GD9-2 or in mounting support 71MT3 45-2.

Device installation solutions for standard installation devices

Always indicate the item number when ordering.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/22 18:28:44 (LLExport_02579) / 2019/04/22

Accessory mounting box for CEE installation 16 A/32 A

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
71GDCEE	—	1	13.700	**6288635**

PA Polyamide


Accessory mounting box for installation of a 5-pole CEE socket, 16 A or 32 A, with four-point fastening track 60 x 60 mm or 70 x 70 mm; with external strain relief for jacketed cables of up to Ø 18 mm; with eccentric lock for quick, screwless fastening.





Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/22 18:28:44 18:28:44 (LLExport_02579) / 2019/04/22

Always indicate the item number when ordering.

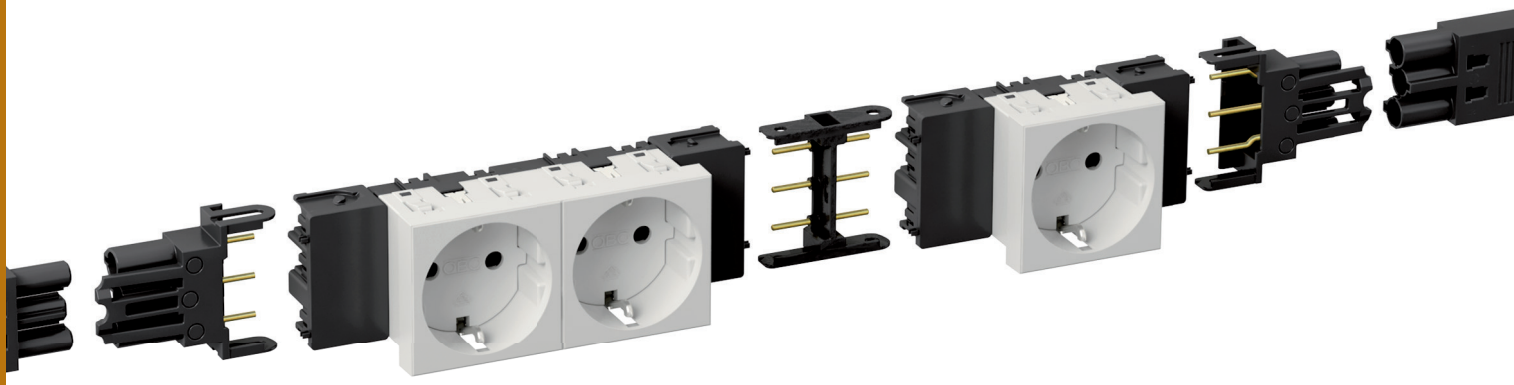

Modul 45connect® – Plug-in installation solutions for device installation ducts and service poles


As continuously connectable installation technology, Modul 45connect for device installation ducts and service poles offers the highest level of flexibility, security and cost efficiency.


From energy distribution through to device connection in the ducts, the system offers all the required installation components.



Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten.indd / 2019/04/18 11:21:04 / 2019/04/18 11:21:04 (LLExport 02579) / 2019/04/18

Socket 0°, Connect 45, protective contact, single



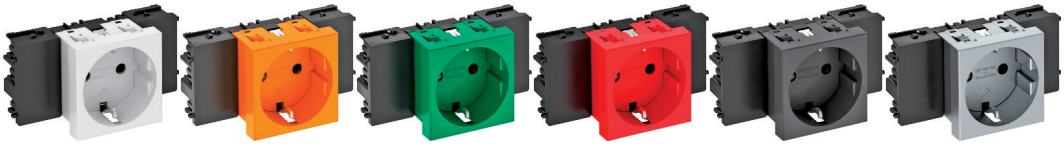


Type	STD-D0C RW1	STD-D0C ROR1	STD-D0C MZGN1	STD-D0C SRO1	STD-D0C SWGR1	STD-D0C AL1
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	6.700	6.700	6.700	6.700	6.700	6.700
Item No.	**6120340**	**6120344**	**6120346**	**6120348**	**6120350**	**6120352**

PC Polycarbonate

Protective contact socket with connection to side, single 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1, suitable for the installation in Rapid 45 device installation trunking system.

Socket 0°, Connect 45, protective contact, double






Type	STD-D0C RW2	STD-D0C ROR2	STD-D0C MZGN2	STD-D0C SRO2	STD-D0C SWGR2	STD-D0C AL2
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	10.100	10.100	10.100	10.100	10.100	10.100
Item No.	**6120362**	**6120364**	**6120366**	**6120368**	**6120370**	**6120372**

PC Polycarbonate

Protective contact socket with connection to side, double 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1, suitable for the installation in Rapid 45 device installation trunking systems.

Socket 0°, Connect 45, protective contact, triple





Type	STD-D0C RW3	STD-D0C ROR3	STD-D0C MZGN3	STD-D0C SRO3	STD-D0C SWGR3	STD-D0C AL3
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	16.500	16.500	16.500	16.500	16.500	16.500
Item No.	**6120382**	**6120384**	**6120386**	**6120388**	**6120390**	**6120392**


PC Polycarbonate


Protective contact socket with connection to side, Triple 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1, suitable for the installation in Rapid 45 device installation trunking systems.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Socket 0°, Connect 45, with earthing pin, single



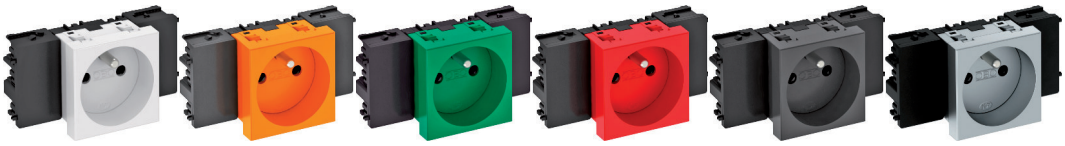


Type	STD-F0C RW1	STD-F0C ROR1	STD-F0C MZGN1	STD-F0C SRO1	STD-F0C SWGR1	STD-F0C AL1
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	6.500	6.500	6.500	6.500	6.500	6.500
Item No.	**6120532**	**6120534**	**6120536**	**6120538**	**6120540**	**6120542**

PC Polycarbonate

Earthing pin socket with connection to side, single 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1, suitable for the installation in Rapid 45 device installation trunking systems.

Socket 0°, Connect 45, with earthing pin, double






Type	STD-F0C RW2	STD-F0C ROR2	STD-F0C MZGN2	STD-F0C SRO2	STD-F0C SWGR2	STD-F0C AL2
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	9.900	9.900	9.900	9.900	9.900	9.900
Item No.	**6120552**	**6120554**	**6120556**	**6120558**	**6120560**	**6120562**

PC Polycarbonate

Earthing pin socket with connection to side, double 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1, suitable for the installation in Rapid 45 device installation trunking systems.

Socket 0°, Connect 45, with earthing pin, triple





Type	STD-F0C RW3	STD-F0C ROR3	STD-F0C MZGN3	STD-F0C SRO3	STD-F0C SWGR3	STD-F0C AL3
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	13.900	13.900	13.900	13.900	13.900	13.900
Item No.	**6120572**	**6120574**	**6120576**	**6120578**	**6120580**	**6120582**


PC Polycarbonate

Earthing pin socket with connection to side, triple 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1, suitable for the installation in Rapid 45 device installation trunking systems.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Socket 0°, Connect 80, protective contact, single







Type	STD-D0C8 RW1	STD-D0C8 ROR1	STD-D0C8 MZGN1	STD-D0C8 SRO1	STD-D0C8 SWGR1	STD-D0C8 AL1
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	8.500	8.500	8.500	8.500	8.500	8.500
Item No.	**6120412**	**6120414**	**6120416**	**6120418**	**6120420**	**6120422**

PC Polycarbonate

Protective contact socket with connection to side, single 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1, suitable for the installation in Rapid 80 device installation trunking system.

Socket 0°, Connect 80, protective contact, double



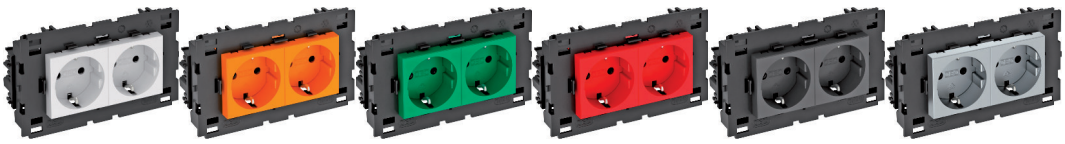



Type	STD-D0C8 RW2	STD-D0C8 ROR2	STD-D0C8 MZGN2	STD-D0C8 SRO2	STD-D0C8 SWGR2	STD-D0C8 AL2
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	13.000	13.000	13.000	13.000	13.000	13.000
Item No.	**6120432**	**6120434**	**6120436**	**6120438**	**6120440**	**6120442**

PC Polycarbonate

Protective contact socket with connection to side, double 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1, suitable for the installation in Rapid 80 device installation trunking systems.

Socket 0°, Connect 80, protective contact, triple



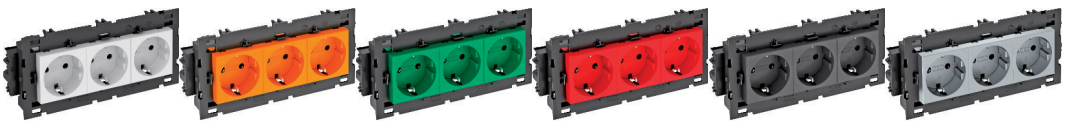

Type	STD-D0C8 RW3	STD-D0C8 ROR3	STD-D0C8 MZGN3	STD-D0C8 SRO3	STD-D0C8 SWGR3	STD-D0C8 AL3
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	20.000	20.000	20.000	20.000	20.000	20.000
Item No.	**6120452**	**6120454**	**6120456**	**6120458**	**6120460**	**6120462**


PC Polycarbonate


Protective contact socket with connection to side, triple 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1, suitable for the installation in Rapid 80 device installation trunking systems.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Socket 0°, Connect 80, with earthing pin, single



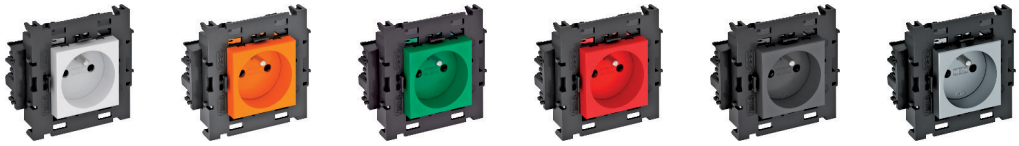



Type	STD-F0C8 RW1	STD-F0C8 ROR1	STD-F0C8 MZGN1	STD-F0C8 SRO1	STD-F0C8 SWGR1	STD-F0C8 AL1
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	8.500	8.500	8.500	8.500	8.500	8.500
Item No.	**6120602**	**6120604**	**6120606**	**6120608**	**6120610**	**6120612**

PC Polycarbonate

Earthing pin socket with connection to side, single 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1, suitable for the installation in Rapid 80 device installation trunking systems.

Socket 0°, Connect 80, with earthing pin, double







Type	STD-F0C8 RW2	STD-F0C8 ROR2	STD-F0C8 MZGN2	STD-F0C8 SRO2	STD-F0C8 SWGR2	STD-F0C8 AL2
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	13.000	13.000	13.000	13.000	13.000	13.000
Item No.	**6120622**	**6120624**	**6120626**	**6120628**	**6120630**	**6120632**

PC Polycarbonate

Socket with earthing pin with side connection double 0°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1, suitable for installation in Rapid 80 device installation trunking systems.

Socket 0°, Connect 80, with earthing pin, triple



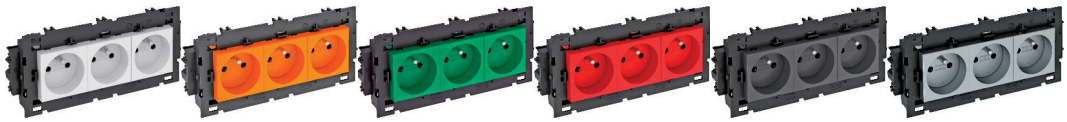

Type	STD-F0C8 RW3	STD-F0C8 ROR3	STD-F0C8 MZGN3	STD-F0C8 SRO3	STD-F0C8 SWGR3	STD-F0C8 AL3
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	17.500	17.500	17.500	17.500	17.500	17.500
Item No.	**6120642**	**6120644**	**6120646**	**6120648**	**6120650**	**6120652**


PC Polycarbonate

Earthing pin socket with connection to side, triple 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1, suitable for the installation in Rapid 80 device installation trunking systems.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Socket 33°, Connect 45, protective contact, double






Type	STD-D3C RW2	STD-D3C ROR2	STD-D3C MZGN2	STD-D3C SRO2	STD-D3C SWGR2	STD-D3C AL2
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	8.500	8.500	8.500	8.500	8.500	8.500
Item No.	**6120482**	**6120484**	**6120486**	**6120488**	**6120490**	**6120492**

PC Polycarbonate

Power socket with side connection double 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

Socket 33°, Connect 45, protective contact, triple






Type	STD-D3C RW3	STD-D3C ROR3	STD-D3C MZGN3	STD-D3C SRO3	STD-D3C SWGR3	STD-D3C AL3
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	11.500	11.500	11.500	11.500	11.500	11.500
Item No.	**6120502**	**6120504**	**6120506**	**6120508**	**6120510**	**6120512**

PC Polycarbonate

Power socket with side connection triple 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

Socket 33°, Connect 45, with earthing pin, double





Type	STD-F3C RW2	STD-F3C ROR2	STD-F3C MZGN2	STD-F3C SRO2	STD-F3C SWGR2	STD-F3C AL2
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	8.500	8.500	8.500	8.500	8.500	8.500
Item No.	**6120672**	**6120674**	**6120676**	**6120678**	**6120680**	**6120682**


PC Polycarbonate

Socket with earthing pin and side connection, double 33°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Modul 45connect® earthing pin sockets 33°

Socket 33°, Connect 45, with earthing pin, triple





Type	STD-F3C RW3	STD-F3C ROR3	STD-F3C MZGN3	STD-F3C SRO3	STD-F3C SWGR3	STD-F3C AL3
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	11.500	11.500	11.500	11.500	11.500	11.500
Item No.	**6120692**	**6120694**	**6120696**	**6120698**	**6120700**	**6120702**


PC Polycarbonate

Socket with earthing pin and side connection, triple 33°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

Modul 45connect® connection adapter

Connection adapter, straight, connector part GST18






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STA-SKS S1 SW	Black	10	1.200	**6117192**
STA-SKS S1 W	White	10	1.200	**6117193**

PA Polyamide

Connector part adapter, straight, for connection to an STD-D0C / STD-D3C or STD-F0C / STD-F3C socket from the side, for VL extension cable with Wieland connector GST 18i 3p.

Connection adapter, straight, socket part GST18







Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
BTA-SKS S1 SW	Black	10	1.200	**6117190**
BTA-SKS S1 W	White	10	1.200	**6117191**

PA Polyamide

Connector part adapter, straight, for connection to an STD-D0C / STD-D3C or STD-F0C / STD-F3C socket from the side, for VL extension cable with Wieland connector GST 18i 3p.

Connection adapter, GST18i, straight






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VB-G GST18i3p	Black	10	1.760	**6108045**

PA Polyamide

Connection adapter GST18i for combining STD-D0C / STD-D3C or STD-F0C / STD-F3C sockets together with straight connection adapters, pluggable connection with integrated strain relief. Suitable for device connections in the device installation trunking systems Rapid 45 and Rapid 80 and in ISS service poles.

Modul 45®, cover frame for 80 mm duct systems

Cover frame AR45, single



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
AR45-F1 RW	Pure white	1	1.600	**6119322**
AR45-F1 SWGR	Black-grey	1	1.600	**6119324**
AR45-F1 AL	Aluminium painted	1	1.600	**6119326**

PC Polycarbonate

Front locking cover frame for Modul 45 devices, single, without labelling panel for horizontal and vertical device installation, for locking in accessory mounting box 71GD8-2.

Always indicate the item number when ordering.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Cover frame AR45, single, with labelling panel for horizontal device installation

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
AR45-BF1 RW	Pure white	1	1.500	**6119332**
AR45-BF1 SWGR	Black-grey	1	1.500	**6119334**
AR45-BF1 AL	Aluminium painted	1	1.500	**6119336**

PC Polycarbonate

Front locking cover frame for Modul 45 devices, single, with labelling panel for horizontal device installation, for locking in accessory mounting box 71GD8-2.




Cover frame AR45, single, with labelling panel for vertical device installation

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
AR45-BSF1 RW	Pure white	1	1.500	**6119338**
AR45-BSF1 SWGR	Black-grey	1	1.500	**6119339**
AR45-BSF1 AL	Aluminium painted	1	1.500	**6119340**

PC Polycarbonate

Front locking cover frame for Modul 45 devices, single, with labelling panel for vertical device installation, for locking in accessory mounting box 71GD8-2.




Cover frame AR45, double

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
AR45-F2 RW	Pure white	1	2.320	**6119342**
AR45-F2 SWGR	Black-grey	1	2.320	**6119344**
AR45-F2 AL	Aluminium painted	1	2.320	**6119346**

PC Polycarbonate

Front locking cover frame for Modul 45 devices, single, without labelling panel for horizontal and vertical device installation, for locking in accessory mounting box 71GD13 or in mounting support 71MT2 45.




Cover frame AR45, double, with labelling panel for horizontal device installation

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
AR45-BF2 RW	Pure white	1	2.260	**6119352**
AR45-BF2 SWGR	Black-grey	1	2.260	**6119354**
AR45-BF2 AL	Aluminium painted	1	2.260	**6119356**

PC Polycarbonate

Front locking cover frame for Modul 45 devices, double, with labelling panel for horizontal device installation, for locking in accessory mounting box 71GD13 or in mounting support 71MT2 45.




Cover frame AR45, double, with labelling panel for vertical device installation

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
AR45-BSF2 RW	Pure white	1	2.260	**6119362**
AR45-BSF2 SWGR	Black-grey	1	2.260	**6119364**
AR45-BSF2 AL	Aluminium painted	1	2.260	**6119366**

PC Polycarbonate

Front locking cover frame for Modul 45 devices, double, with labelling panel for vertical device installation, for locking in accessory mounting box 71GD13 or in mounting support 71MT2 45.




Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Modul 45®, cover frame for 80 mm duct systems

Cover frame AR45, triple




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
AR45-F3 RW	Pure white	1	2.800	**6119372**
AR45-F3 SWGR	Black-grey	1	2.800	**6119374**
AR45-F3 AL	Aluminium painted	1	2.800	**6119376**

PC Polycarbonate

Front locking cover frame for Modul 45 devices, triple, without labelling panel for horizontal and vertical device installation, for locking in accessory mounting box 71GD9-2 or in mounting support 71MT3 45-2.

Cover frame AR45, triple, with labelling panel for horizontal device installation




Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
AR45-BF3 RW	Pure white	1	2.800	**6119382**
AR45-BF3 SWGR	Black-grey	1	2.800	**6119384**
AR45-BF3 AL	Aluminium painted	1	2.800	**6119386**

PC Polycarbonate

Front locking cover frame for Modul 45 devices, triple, with labelling panel for horizontal device installation, for locking in accessory mounting box 71GD9-2 or in mounting support 71MT3 45-2.

Cover frame AR45, triple, with labelling panel for vertical device installation



Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
AR45-BSF3 RW	Pure white	1	2.800	**6119387**
AR45-BSF3 SWGR	Black-grey	1	2.800	**6119388**
AR45-BSF3 AL	Aluminium painted	1	2.800	**6119389**


PC Polycarbonate

Front locking cover frame for Modul 45 devices, triple, with labelling panel for vertical device installation, for locking in accessory mounting box 71GD9-2 or in mounting support 71MT3 45-2.

Consolidation Point

CP support plate for 3 snap-in plug connectors, 3-pole







Type	Pack. pcs	Weight kg/100 pcs.	Item No.
CP45-TP 3SI	1	6.200	**6108024**

St Steel

Support plate to accept three snap-In connectors, 3-pole, in a Consolidation Point housing.

CP support plate for 4 snap-in plug connectors, 3-pole





Type	Pack. pcs	Weight kg/100 pcs.	Item No.
CP45-TP 4SI	1	5.700	**6108026**

St Steel

Support plate to accept four snap-In connectors, 3-pole, in a Consolidation Point housing.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.


CP support plate, for 8 data connection modules, type C


Type	Pack. pcs	Weight kg/100 pcs.	Item No.
CP45-TP 8C	1	5.400	**6108028**

St Steel

Support plate, type C, to accept eight data connection modules in a Consolidation Point housing. Type C has a mounting opening of 19.30 x 14.80 mm.

Support plate type C is suitable for accepting the following data connection modules: BTR (Keystone design): Cat.6A Modul und UAE Modul; Corning: Modules with Keystone seat; CobiNet: CobiDat KS module; Dätwyler: KS-T, KS-TS, MS-K and KU-T; EKU: E-Stone; Harting: Prelink Keystone Cat.6A, Fixlink Keystone Cat.6A; Komos: KDM 500 module; Leoni Kerpen: MegaLine-Connect45 socket modules Keystone; OBO: Data connection modules snap-In type ASM-C5 S, ASM-C5 GS, ASM-C6 S, ASM-C6 GS and Keystone type ASM-C6A, ASM-C6A G; R&M: Cat.6A with Keystone fastening; Rutenbeck: UM and UMflex; SETEC: UKJ and XKJ; Telegärtner: AMJ and UMJ.






Connection cables with GST18 connector system

3-wire connection cable, PVC, cross-section 2.5 mm², black

Type	Cable length mm	Cross-section mm²	Number of poles	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VL-3Q2.5 1 SW	1000	2.5	3	Black	1	18.000	**6108150**
VL-3Q2.5 2 SW	2000	2.5	3	Black	1	36.000	**6108151**
VL-3Q2.5 3 SW	3000	2.5	3	Black	1	54.000	**6108152**
VL-3Q2.5 4 SW	4000	2.5	3	Black	1	72.000	**6108153**
VL-3Q2.5 5 SW	5000	2.5	3	Black	1	90.000	**6108154**
VL-3Q2.5 6 SW	6000	2.5	3	Black	1	108.000	**6108155**
VL-3Q2.5 7 SW	7000	2.5	3	Black	1	126.000	**6108156**
VL-3Q2.5 8 SW	8000	2.5	3	Black	1	144.000	**6108157**
VL-3Q2.5 9 SW	9000	2.5	3	Black	1	162.000	**6108158**
VL-3Q2.5 10 SW	10000	2.5	3	Black	1	180.000	**6108159**

Connection cable 3 x 2.5 mm² in the version socket – connector with GST18i connection system.






3-wire connection cable, halogen-free, cross-section 2.5 mm², black

Type	Cable length mm	Cross-section mm²	Number of poles	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VL-3Q2.5 H1 SW	1000	2.5	3	Black	1	16.000	**6108450**
VL-3Q2.5 H2 SW	2000	2.5	3	Black	1	32.000	**6108451**
VL-3Q2.5 H3 SW	3000	2.5	3	Black	1	48.000	**6108452**
VL-3Q2.5 H4 SW	4000	2.5	3	Black	1	64.000	**6108453**
VL-3Q2.5 H5 SW	5000	2.5	3	Black	1	80.000	**6108454**
VL-3Q2.5 H6 SW	6000	2.5	3	Black	1	96.000	**6108455**
VL-3Q2.5 H7 SW	7000	2.5	3	Black	1	112.000	**6108456**
VL-3Q2.5 H8 SW	8000	2.5	3	Black	1	128.000	**6108457**
VL-3Q2.5 H9 SW	9000	2.5	3	Black	1	144.000	**6108458**
VL-3Q2.5 H10 SW	10000	2.5	3	Black	1	160.000	**6108459**

Halogen-free connection cables 3 x 2.5 mm² in the version socket – connector with GST18i connection system.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Connector part 3-pin, spring power connection





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ST-F GST18i3p SW	Black	1	2.600	6108050
ST-F GST18i3p W	White	1	2.620	6108051


Connector part, 3-pin, type GST18i with spring power connection for rigid cables of 1.5–2.5 mm², single-wire and ultrasonically welded, fine wire cables 1.5 mm² with end sleeves, unmounted with strain relief, can be terminated in situ, 250 V, 16 A.

Two connections per pole, for cables H05VV, NYM (Ø 7.8–10.33 mm), lockable, a lock should be provided for strain relief according to VDE 0628.

Stripping length: 45 mm
Stripped length: 9 mm

Connector part, 3-pin, screw connection






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ST-S GST18i3p SW	Black	1	2.030	6108054
ST-S GST18i3p W	White	1	2.030	6108055

Connector part, 3-pin, type GST18i with screw connection, low height (no slot loss in combination with distributor blocks), for cross-sections of 0.75–2.5 mm², single- and fine-wire cables connectable without end sleeve, for cable diameters between 6.5–10.5 mm (H05VV, NYM), unmounted with strain relief, terminable in situ, 250 V, 16 A.

Stripping length: 31 mm
Insulation removal length: 7 mm

Socket section 3-pin, spring power connection





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
BT-F GST18i3p SW	Black	1	2.620	6108052
BT-F GST18i3p W	White	1	2.690	6108053


Socket part, 3-pin, type GST18i with spring power connection for rigid cables of 1.5–2.5 mm², single-wire and ultrasonically welded, fine wire cables 1.5 mm² with end sleeves, unmounted with strain relief, can be terminated in situ, 250 V, 16 A.

Two connections per pole, for cables H05VV, NYM (Ø 7.8–10.33 mm), lockable, a lock should be provided for strain relief according to VDE 0628.

Stripping length: 45 mm
Stripped length: 9 mm

Socket section 3-pin, screw connection






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
BT-S GST18i3p SW	Black	1	2.150	6108056
BT-S GST18i3p W	White	1	2.150	6108057

Socket part, 3-pin, type GST18i with screw connection, low height (no slot loss in combination with distributor blocks), for cross-sections of 0.75–2.5 mm², single- and fine-wire cables connectable without end sleeve, for cable diameters between 6.5–10.5 mm (H05VV, NYM), unmounted with strain relief, terminable in situ, 250 V, 16 A.

Stripping length: 31 mm
Insulation removal length: 7 mm

Distributor block 3-pin





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VB-3 GST18i3p	Black	1	3.590	6108080

Distributor block with lock, type GST18i, one input with plug section 3-pin and three outputs with socket section 3-pin.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Distributor block 3-pin

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VB-5 GST18i3p	Black	1	5.590	6108082

Distributor block with lock, type GST18i, one input with plug section 3-pin and five outputs with socket section 3-pin.






Distributor block, 3-pin, T-shaped

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VB-T GST18i3p	Black	1	2.540	6108084

T distributor with lock, type GST18i, one input with 3-pin connector part and two outputs with 3-pin socket part.






Connector part, 5-pin, screw connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ST-S GST18i5p SW	Black	1	4.330	6108070

Connector part, 5-pin, type GST18i, with screw connection for 1.5–2.5 mm² cables, single and fine-wire, with strain relief, one connection per pin, unmounted, for cables H05VV (Ø 9.5–13.5) NYM and (Ø 10.5–13.5 mm), lockable, according to the strain relief in VDE 0628 a lock should be planned, 250 V, 16 A.

Stripping length: 8 mm
Jacket removal length: 46 mm






Socket section 5-pin, screw connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
BT-S GST18i5p SW	Black	1	4.550	6108072

Socket part, 5-pin, type GST18i, with screw connection for 1.5 to 2.5 mm² cables, single and fine-wire, with strain relief, one connection per pin, unmounted, for cables H05VV (Ø 9.5 – 13.5) NYM and (Ø 10.5 to 13.5 mm), lockable, according to the strain relief in VDE 0628 a lock should be planned, 250 V, 16 A.

Stripping length: 8 mm
Jacket removal length: 46 mm






Distributor block, 3-pole

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VB-2 GST18i3p	Black	1	3.300	6108086

PA Polyamide

Distributor block with lock, type GST18i, 1 input with 3-pin plug section and 2 outputs with 3-pin socket section.






Connector part, 3-pin, screw connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ST-S4 GST18i3 SW	Black	1	1.600	6108060
ST-S4 GST18i3 W	White	1	1.600	6108062

PA Polyamide


Connector part, 3-pin, type GST18i with screw connection for cables of 1.5–4.0 mm² and cable diameters between 10.5–14.5 mm (H05VV, NYM), unmounted with strain relief, terminable in situ, 250 V, 16 A.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Socket section 3-pin, screw connection







Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
BT-S4 GST18i3 SW	Black	1	1.600	**6108064**
BT-S4 GST18i3 W	White	1	1.600	**6108066**

PA Polyamide

Socket section, 3-pin, type GST18i with screw connection for cables of 1.5–4.0 mm² and for cable diameters between 10.5–14.5 mm (H05VV, NYM), unmounted with strain relief, terminable in situ, 250 V, 16 A.

Locking





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VR-GST18	Black	10	0.100	**6108074**

PA Polyamide

Locking clip for GST18, plug connections, for locking connection cables.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18



Modul 45connect® – plug-in installation solutions for raised and cavity floors

The Modul 45connect for underfloor systems is a continuous, connectable installation technology. This is designed for installation in a system floor. Modul 45connect offers the highest level of flexibility, security and cost efficiency.


The system offers all the required installation components: From energy distribution through to device connection in the floor box.



UTC3 with 2 protective contact sockets

Type	Circuit	Connection system	Version	Pack. pcs	Weight kg/100 pcs.	Item No.
UTC3 G W2	1	GST18	Double pure white	1	16.370	**7404662**

The ready-for-connection UTC3 universal support possesses two pre-installed 33° protective contact sockets and one blanking cover for retroinstallation of one installation device of the Modul 45 or Modul 45connect series.






UTC3 with 3 protective contact sockets

Type	Circuit	Connection system	Version	Pack. pcs	Weight kg/100 pcs.	Item No.
UTC3 G W3	1	GST18	Triple pure white	1	19.780	**7404664**

The ready-for-connection UTC3 universal support possesses three pre-installed 33° protective contact sockets with 16 A.






UTC3 with 2+1 protective contact sockets

Type	Circuit	Connection system	Version	Pack. pcs	Weight kg/100 pcs.	Item No.
UTC3 G W2OR1	2	GST18	Double pure white/ Single pure orange	1	26.630	**7404660**

Ready-for-connection UTC3 universal support with halogen-free connection cable. It possesses two pre-installed 33° protective contact sockets in white and one pre-installed 33° protective contact socket in orange with 16 A.






UTC4 with 2 protective contact sockets

Type	Circuit	Connection system	Version	Pack. pcs	Weight kg/100 pcs.	Item No.
UTC4 G W2	1	GST18	Double pure white	1	18.500	**7404674**
UTC4 G OR2	1	GST18	Double pure orange	1	18.460	**7404670**

The ready-for-connection UTC4 universal support possesses two pre-installed 33° protective contact sockets with 16 A and two blanking covers for retroinstallation of two installation devices of the Modul 45 or Modul 45connect series.






UTC4 with 3 protective contact sockets

Type	Circuit	Connection system	Version	Pack. pcs	Weight kg/100 pcs.	Item No.
UTC4 G W3	1	GST18	Triple pure white	1	21.960	**7404680**

The ready-for-connection UTC4 universal support possesses three pre-installed 33° protective contact sockets with 16 A and one blanking cover for retroinstallation of one installation device of the Modul 45 or Modul 45connect series.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

UTC4 with 4 protective contact sockets






Type	Circuit	Connection system	Version	Pack. pcs	Weight kg/100 pcs.	Item No.
UTC4 G W4	1	GST18	4x pure white	1	26.830	**7404682**
UTC4 G OR4	1	GST18	4x pure orange	1	26.730	**7404672**

The ready-for-connection UTC4 universal support possesses four pre-installed 33° protective contact sockets with 16 A.

UTC4 with 2+2 protective contact sockets






Type	Circuit	Connection system	Version	Pack. pcs	Weight kg/100 pcs.	Item No.
UTC4 G W2OR2	2	GST18	Double pure white/ Double pure orange	1	27.290	**7404676**

The ready-for-connection UTC4 universal support possesses two pre-installed 33° protective contact sockets in pure white and two 33° pre-installed protective contact sockets in pure orange with 16 A.

UTC4 with 2+2 protective contact sockets, 2 sockets with surge protection






Type	Circuit	Connection system	Version	Pack. pcs	Weight kg/100 pcs.	Item No.
UTC4 G W2OR2 Ü	2	GST18	Double pure white/ Double pure orange	1	31.300	**7404678**

The ready-for-connection UTC4 universal support possesses two pre-installed 33° protective contact sockets in pure white and two pre-installed 33° protective contact sockets in pure orange with 16 A. The protective contact sockets in pure orange are protected by a type 3 surge protection module according to DIN EN 61643-11.

UTC4 with 3+1 protective contact sockets






Type	Circuit	Connection system	Version	Pack. pcs	Weight kg/100 pcs.	Item No.
UTC4 G W3OR1	2	GST18	Triple pure white/ Single pure orange	1	29.510	**7404684**

Ready-for-connection universal support UTC4 with halogen-free connection cable. It possesses three pre-installed 33° protective contact sockets in pure white and one 33° protective contact socket in pure orange with 16 A.

UTC4 with 3+1 protective contact sockets, 1 socket with surge protection





Type	Circuit	Connection system	Version	Pack. pcs	Weight kg/100 pcs.	Item No.
UTC4 G W3OR1 Ü	2	GST18	Triple pure white/ Single pure orange	1	33.530	**7404686**


Ready-for-connection universal support UTC4 with halogen-free connection cable. It possesses three pre-installed 33° protective contact sockets in white and one 33° protective contact socket in pure orange with 16 A. The protective contact socket in pure orange is protected by a type 3 surge protection module according to DIN EN 61643-11.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

UTC4 with 2+1 protective contact sockets

Type	Circuit	Connection system	Version	Pack. pcs	Weight kg/100 pcs.	Item No.
UTC4 G OR2GN1	2	GST18	Double pure orange / Single mint green	1	32.200	**7404688**






Ready-for-connection universal support UTC4 with halogen-free connection cable. It possesses two pre-installed 33° protective contact sockets in orange and one 33° protective contact socket in mint green with 16 A. A blanking cover allows retroinstallation of one installation device of the Modul 45 or Modul 45connect series.

Modul 45connect® protective contact sockets and UT universal support

Universal support UT3, system length 165 mm

Type	Length mm	Installation technology	Width mm	Height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UT3 45 3	165	Grid M45	76	40	1	10.600	**7408723**

PA Polyamide






Universal support with two strain reliefs, mounting bridge, partition and UT3 P3 cover plate for installation of 3 Modul 45 devices in device installation units of nominal sizes 2, R4, 4, 6 and R7.

Universal support UT4, system length 208 mm

Type	Length mm	Width mm	Height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UT4 45 4	208	76	40	1	13.500	**7408727**

PA Polyamide






Universal support with two strain reliefs, mounting bridges, partition and UT4 P4 cover plate for installation of 4 Modul 45 devices in device installation units of nominal sizes R7, R9 and 9.

Socket 33°, Connect 45, protective contact, single

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D3C GS RW1	Pure white	1	10.500	**6120810**

PC Polycarbonate






Ready-for-connection protective contact socket single 33°, with increased touch protection, incl. 0.25 m connection cable with GST18 connector and locking clip, 16 A, 250 V~.

Socket 33°, Connect 45, protective contact, single

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D3C GW ROR1	Pure orange	1	10.500	**6120832**
STD-D3C GW MZGN1	Mint green	1	10.500	**6120834**
STD-D3C GW SRO1	Signal red	1	10.500	**6120836**

PC Polycarbonate





Ready-for-connection protective contact socket single 33°, with increased touch protection, incl. 0.25 m connection cable with GST18 connector and locking clip, 16 A, 250 V~.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Modul 45connect® protective contact sockets and UT universal support

Socket 33°, Connect 45, protective contact, double






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D3C RW2	Pure white	1	8.500	6120482
STD-D3C ROR2	Pure orange	1	8.500	6120484
STD-D3C MZGN2	Mint green	1	8.500	6120486
STD-D3C SRO2	Signal red	1	8.500	6120488

PC Polycarbonate

Power socket with side connection double 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

Socket 33°, Connect 45, protective contact, triple





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D3C RW3	Pure white	1	11.500	6120502
STD-D3C ROR3	Pure orange	1	11.500	6120504
STD-D3C MZGN3	Mint green	1	11.500	6120506
STD-D3C SRO3	Signal red	1	11.500	6120508


PC Polycarbonate

Power socket with side connection triple 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

Modul 45connect® earthing pin sockets and UT universal support

Universal support UT3, system length 165 mm






Type	Length mm	Installation technology	Width mm	Height mm	Pack. pcs	Item No.
UT3 45 3	165	Grid M45	76	40	1	7408723

PA Polyamide

Universal support with two strain reliefs, mounting bridge, partition and UT3 P3 cover plate for installation of 3 Modul 45 devices in device installation units of nominal sizes 2, R4, 4, 6 and R7.

Universal support UT4, system length 208 mm






Type	Length mm	Width mm	Height mm	Pack. pcs	Item No.
UT4 45 4	208	76	40	1	7408727

PA Polyamide

Universal support with two strain reliefs, mounting bridges, partition and UT4 P4 cover plate for installation of 4 Modul 45 devices in device installation units of nominal sizes R7, R9 and 9.

Socket 33°, Connect 45, with earthing pin, single






Type	Colour	Pack. pcs	Item No.
STD-F3C GS RW1	Pure white	1	6120850

PC Polycarbonate

Ready-for-connection protective contact socket single 33°, with increased touch protection, incl. 0.25 m connection cable with GST18 connector and locking clip, 16 A, 250 V~.

Socket 33°, Connect 45, with earthing pin, single





Type	Colour	Pack. pcs	Item No.
STD-F3C GW ROR1	Pure orange	1	6120872
STD-F3C GW MZGN1	Mint green	1	6120874
STD-F3C GW SRO1	Signal red	1	6120876

PC Polycarbonate

Ready-for-connection protective contact socket single 33°, with increased touch protection, incl. 0.25 m connection cable with GST18 connector and locking clip, 16 A, 250 V~.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.

Socket 33°, Connect 45, with earthing pin, double

Type	Colour	Pack. pcs	Item No.
STD-F3C RW2	Pure white	1	**6120672**
STD-F3C ROR2	Pure orange	1	**6120674**
STD-F3C MZGN2	Mint green	1	**6120676**
STD-F3C SRO2	Signal red	1	**6120678**

PC Polycarbonate

Socket with earthing pin and side connection, double 33°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.






Socket 33°, Connect 45, with earthing pin, triple

Type	Colour	Pack. pcs	Item No.
STD-F3C RW3	Pure white	1	**6120692**
STD-F3C ROR3	Pure orange	1	**6120694**
STD-F3C MZGN3	Mint green	1	**6120696**
STD-F3C SRO3	Signal red	1	**6120698**
STD-F3C AL3	Aluminium painted	1	**6120702**

PC Polycarbonate

Socket with earthing pin and side connection, triple 33°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.






CP support plate for 3 snap-in plug connectors, 3-pole

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
CP45-TP 3SI	1	6.200	**6108024**

St Steel

Support plate to accept three snap-In connectors, 3-pole, in a Consolidation Point housing.






CP support plate for 4 snap-in plug connectors, 3-pole

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
CP45-TP 4SI	1	5.700	**6108026**

St Steel

Support plate to accept four snap-In connectors, 3-pole, in a Consolidation Point housing.







Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Consolidation Point

CP support plate, for 8 data connection modules, type C





Type	Pack. pcs	Weight kg/100 pcs.	Item No.
CP45-TP 8C	1	5.400	**6108028**

St Steel


Support plate, type C, to accept eight data connection modules in a Consolidation Point housing. Type C has a mounting opening of 19.30 x 14.80 mm.

Support plate type C is suitable for accepting the following data connection modules: BTR (Keystone design): Cat.6A Modul und UAE Modul; Corning: Modules with Keystone seat; CobiNet: CobiDat KS module; Dätwyler: KS-T, KS-TS, MS-K and KU-T; EKU: E-Stone; Harting: Prelink Keystone Cat.6A, Fixlink Keystone Cat.6A; Komos: KDM 500 module; Leoni Kerpen: MegaLine-Connect45 socket modules Keystone; OBO: Data connection modules snap-In type ASM-C5 S, ASM-C5 GS, ASM-C6 S, ASM-C6 GS and Keystone type ASM-C6A, ASM-C6A G; R&M: Cat.6A with Keystone fastening; Rutenbeck: UM and UMflex; SETEC: UKJ and XKJ; Telegärtner: AMJ and UMJ.

Energy distributor with GST18 connector system, fixed connection

UVS energy distributor with fixed connection, normal circuit





Type	Pack. pcs	Weight kg/100 pcs.	Item No.
UVS-6S2	1	77.000	**6108000**


St Steel

Energy distributor for heavy current technology with fixed connection, equipped and pre-wired.

Input: One 3-phase circuit via a screwless terminal block, 5-pin, for cable cross-sections of 0.5–4 mm².
Output: Six self-locking connectors, 3-pin, in black, 16 A, type GST18i (socket part: 2 x L1, 2 x L2, 2 x L3).
Internal wiring: PVC non-sheathed cable H07V-U2.5.

UVS energy distributor with fixed connection, special circuit





Type	Pack. pcs	Weight kg/100 pcs.	Item No.
UVS-6W2	1	77.000	**6108005**


St Steel

Energy distributor for heavy current technology with fixed connection, equipped and pre-wired.

Input: One 3-phase circuit via a screwless terminal block, 5-pin, for cable cross-sections of 0.5–4 mm².
Output: Six self-locking connectors, 3-pin, in white, 16 A, type GST18i (socket part: 2 x L1, 2 x L2, 2 x L3).
Internal wiring: PVC non-sheathed cable H07V-U2.5.

UVS energy distributor with fixed connection, normal and special circuit





Type	Pack. pcs	Weight kg/100 pcs.	Item No.
UVS-6S6W2	1	146.100	**6108010**

St Steel

Energy distributor for heavy current technology with fixed connection, equipped and pre-wired.

Input: Two 3-phase circuits via a screwless terminal block, 5-pin, for cable cross-sections of 0.5–4 mm².
Output: Twelve self-locking connectors, 3-pin, in white (6x) and black (6x), 16 A, type GST18i (socket part: 2 x L1, 2 x L2, 2 x L3 for each rotary current circuit).
Internal wiring: PVC non-sheathed cable H07V-U2.5.

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


UVS energy distributor with plug connection, normal circuit

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
UVS-6S2SA		1	79.000	**6108012**

St Steel

Energy distributor for heavy current technology with plug connection, equipped and pre-wired.

Input: One 3-phase circuit using a self-locking connector, 5-pin, type GST18i (connector part).
Output: Six self-locking connectors, 3-pin, in black, 16 A, type GST18i (socket part: 2 x L1, 2 x L2, 2 x L3).
Internal wiring: PVC non-sheathed cable H07V-U2.5.






UVS energy distributor with plug connection, special circuit

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
UVS-6W2SA		1	79.000	**6108014**

St Steel

Energy distributor for heavy current technology with plug connection, equipped and pre-wired.

Input: One 3-phase circuit using a self-locking connector, 5-pin, type GST18i (connector part).
Output: Six self-locking connectors, 3-pin, in white, 16 A, type GST18i (socket part: 2 x L1, 2 x L2, 2 x L3).
Internal wiring: PVC non-sheathed cable H07V-U2.5.






UVS energy distributor with plug connection, normal and special circuit

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
UVS-6S6W2SA		1	140.000	**6108016**

St Steel

Energy distributor for heavy current technology with plug connection, equipped and pre-wired.

Input: Two 3-phase circuits using self-locking connectors, 5-pin, type GST18i (connector part).
Output: Twelve self-locking connectors, 3-pin, in white (6x) and black (6x), 16 A, type GST18i (socket part: 2 x L1, 2 x L2, 2 x L3 for each rotary current circuit).
Internal wiring: PVC non-sheathed cable H07V-U2.5.






UVS energy distributor with fixed connection, normal circuit

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
UVS-6S2SA1P	–	1	79.000	**6108013**

St Steel

FS Strip-galvanised

Energy distributor for heavy current technology with plug connection, equipped and pre-wired.
Input: one single-phase circuit using a self-locking connector, 3-pin, Type GST18i (connector part).
Output: Six self-locking connectors, 3-pin, in black, 16 A, Type GST18i
Internal wiring: PVC non-sheathed cable H07V-U2.5.






UVS energy distributor with fixed connection, special circuit

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
UVS-6W2SA1P	–	1	79.000	**6108015**

St Steel

FS Strip-galvanised

Energy distributor for heavy current technology with plug connection, equipped and pre-wired.
Input: one single-phase circuit using a self-locking connector, 3-pin, Type GST18i (connector part).
Output: Six self-locking connectors, 3-pin, in white, 16 A, Type GST18i
Internal wiring: PVC non-sheathed cable H07V-U2.5.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Connection cables with GST18 connector system

3-wire connection cable, halogen-free, cross-section 2.5 mm², black






Type	Cable length mm	Cross-section mm²	Number of poles	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VL-3Q2.5 H1 SW	1000	2.5	3	Black	1	16.000	**6108450**
VL-3Q2.5 H2 SW	2000	2.5	3	Black	1	32.000	**6108451**
VL-3Q2.5 H3 SW	3000	2.5	3	Black	1	48.000	**6108452**
VL-3Q2.5 H4 SW	4000	2.5	3	Black	1	64.000	**6108453**
VL-3Q2.5 H5 SW	5000	2.5	3	Black	1	80.000	**6108454**
VL-3Q2.5 H6 SW	6000	2.5	3	Black	1	96.000	**6108455**
VL-3Q2.5 H7 SW	7000	2.5	3	Black	1	112.000	**6108456**
VL-3Q2.5 H8 SW	8000	2.5	3	Black	1	128.000	**6108457**
VL-3Q2.5 H9 SW	9000	2.5	3	Black	1	144.000	**6108458**
VL-3Q2.5 H10 SW	10000	2.5	3	Black	1	160.000	**6108459**

Halogen-free connection cables 3 x 2.5 mm² in the version socket – connector with GST18i connection system.

3-wire connection cable, PVC, cross-section 2.5 mm², black







Type	Cable length mm	Cross-section mm²	Number of poles	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VL-3Q2.5 1 SW	1000	2.5	3	Black	1	18.000	**6108150**
VL-3Q2.5 2 SW	2000	2.5	3	Black	1	36.000	**6108151**
VL-3Q2.5 3 SW	3000	2.5	3	Black	1	54.000	**6108152**
VL-3Q2.5 4 SW	4000	2.5	3	Black	1	72.000	**6108153**
VL-3Q2.5 5 SW	5000	2.5	3	Black	1	90.000	**6108154**
VL-3Q2.5 6 SW	6000	2.5	3	Black	1	108.000	**6108155**
VL-3Q2.5 7 SW	7000	2.5	3	Black	1	126.000	**6108156**
VL-3Q2.5 8 SW	8000	2.5	3	Black	1	144.000	**6108157**
VL-3Q2.5 9 SW	9000	2.5	3	Black	1	162.000	**6108158**
VL-3Q2.5 10 SW	10000	2.5	3	Black	1	180.000	**6108159**

Connection cable 3 x 2.5 mm² in the version socket – connector with GST18i connection system.

Installation accessories for GST18 connector system

Locking






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VR-GST18	Black	10	0.100	**6108074**

PA Polyamide

Locking clip for GST18, plug connections, for locking connection cables.

Connector part, 3-pin, screw connection





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ST-S GST18i3p SW	Black	1	2.030	**6108054**
ST-S GST18i3p W	White	1	2.030	**6108055**

Connector part, 3-pin, type GST18i with screw connection, low height (no slot loss in combination with distributor blocks), for cross-sections of 0.75–2.5 mm², single- and fine-wire cables connectable without end sleeve, for cable diameters between 6.5–10.5 mm (H05VV, NYM), unmounted with strain relief, terminable in situ, 250 V, 16 A.


Stripping length: 31 mm
Insulation removal length: 7 mm

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Connector part 3-pin, spring power connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ST-F GST18i3p SW	Black	1	2.600	**6108050**
ST-F GST18i3p W	White	1	2.620	**6108051**






Connector part, 3-pin, type GST18i with spring power connection for rigid cables of 1.5–2.5 mm², single-wire and ultrasonically welded, fine wire cables 1.5 mm² with end sleeves, unmounted with strain relief, can be terminated in situ, 250 V, 16 A.

Two connections per pole, for cables H05VV, NYM (Ø 7.8–10.33 mm), lockable, a lock should be provided for strain relief according to VDE 0628.

Stripping length: 45 mm
Stripped length: 9 mm

Socket section 3-pin, screw connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
BT-S GST18i3p SW	Black	1	2.150	**6108056**
BT-S GST18i3p W	White	1	2.150	**6108057**






Socket part, 3-pin, type GST18i with screw connection, low height (no slot loss in combination with distributor blocks), for cross-sections of 0.75–2.5 mm², single- and fine-wire cables connectable without end sleeve, for cable diameters between 6.5–10.5 mm (H05VV, NYM), unmounted with strain relief, terminable in situ, 250 V, 16 A.

Stripping length: 31 mm
Insulation removal length: 7 mm

Socket section 3-pin, spring power connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
BT-F GST18i3p SW	Black	1	2.620	**6108052**
BT-F GST18i3p W	White	1	2.690	**6108053**






Socket part, 3-pin, type GST18i with spring power connection for rigid cables of 1.5–2.5 mm², single-wire and ultrasonically welded, fine wire cables 1.5 mm² with end sleeves, unmounted with strain relief, can be terminated in situ, 250 V, 16 A.

Two connections per pole, for cables H05VV, NYM (Ø 7.8–10.33 mm), lockable, a lock should be provided for strain relief according to VDE 0628.

Stripping length: 45 mm
Stripped length: 9 mm

Connector part, 5-pin, screw connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ST-S GST18i5p SW	Black	1	4.330	**6108070**






Connector part, 5-pin, type GST18i, with screw connection for 1.5–2.5 mm² cables, single and fine-wire, with strain relief, one connection per pin, unmounted, for cables H05VV (Ø 9.5–13.5) NYM and (Ø 10.5–13.5 mm), lockable, according to the strain relief in VDE 0628 a lock should be planned, 250 V, 16 A.

Stripping length: 8 mm
Jacket removal length: 46 mm

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Socket section 5-pin, screw connection






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
BT-S GST18i5p SW	Black	1	4.550	6108072

Socket part, 5-pin, type GST18i, with screw connection for 1.5 to 2.5 mm² cables, single and fine-wire, with strain relief, one connection per pin, unmounted, for cables H05VV (Ø 9.5 – 13.5) NYM and (Ø 10.5 to 13.5 mm), lockable, according to the strain relief in VDE 0628 a lock should be planned, 250 V, 16 A.

Stripping length: 8 mm
Jacket removal length: 46 mm

Distributor block, 3-pin, T-shaped







Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VB-T GST18i3p	Black	1	2.540	6108084

T distributor with lock, type GST18i, one input with 3-pin connector part and two outputs with 3-pin socket part.

Distributor block 3-pin






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VB-3 GST18i3p	Black	1	3.590	6108080
VB-5 GST18i3p	Black	1	5.590	6108082

Distributor block with lock, type GST18i, one input with plug section 3-pin and three outputs with socket section 3-pin.

Distributor block, 3-pole






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VB-2 GST18i3p	Black	1	3.300	6108086

PA Polyamide

Distributor block with lock, type GST18i, 1 input with 3-pin plug section and 2 outputs with 3-pin socket section.

Connector part, 3-pin, screw connection







Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ST-S4 GST18i3 SW	Black	1	1.600	6108060
ST-S4 GST18i3 W	White	1	1.600	6108062

PA Polyamide

Connector part, 3-pin, type GST18i with screw connection for cables of 1.5–4.0 mm² and cable diameters between 10.5–14.5 mm (H05VV, NYM), unmounted with strain relief, terminable in situ, 250 V, 16 A.

Socket section 3-pin, screw connection





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
BT-S4 GST18i3 SW	Black	1	1.600	6108064
BT-S4 GST18i3 W	White	1	1.600	6108066

PA Polyamide

Socket section, 3-pin, type GST18i with screw connection for cables of 1.5–4.0 mm² and for cable diameters between 10.5–14.5 mm (H05VV, NYM), unmounted with strain relief, terminable in situ, 250 V, 16 A.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.





Modul 45® and standard – Suspended power supply units VH / VHF

Suspended energy distributors for workplaces and machines in industry, the trades and in training areas. The power supply units can be positioned freely in the room. The supply comes from the ceiling. They can be equipped flexibly from power, data and media technology through to work media such as compressed air.



Gesamtkatalog_21_LFS_EGS_UFS_2019_Betten_Versetzen / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


VH-4 power supply unit, 4x protective contact socket

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VH-4 4SD	Graphite black	1	95.000	6109802

PA Polyamide

Housing equipped and pre-wired with suspension lug, grip hook and four cover plates.

Equipped as follows: 4x single protective contact sockets 16 A/250 V with increased touch protection, pre-wired for two AC currents, connection via 2x 3-pin terminals, 1x CEE socket 16 A/415 V, with partition for circuit separation.






VH-4 power supply unit, 3x protective contact socket, 1x CEE 16 A

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VH-4 3SD1C16	Graphite black	1	115.700	6109804

PA Polyamide

Housing equipped and pre-wired with suspension lug, grip hook and four cover plates.

Equipped as follows: 3x single protective contact sockets 16 A/250 V with increased touch protection, pre-wired for an AC current, connection via 1x 3-pin terminal, 1x CEE socket 16 A/415 V, with partition for circuit separation.






VH-4 power supply unit, 4x earthing pin socket

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VH-4 4SF	Graphite black	1	95.000	6109806

PA Polyamide

Housing equipped and pre-wired with suspension lug, grip hook and four cover plates.

Equipped as follows: 4x single sockets with earthing pin 16 A/250 V with increased touch protection, pre-wired for two AC currents, connection via 2x 3-pin terminals, 1x CEE socket 16 A/415 V, with partition for circuit separation.






VH-4 power supply unit, 3x earthing pin socket, 1x CEE 16 A

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VH-4 3SF1C16	Graphite black	1	115.700	6109808

PA Polyamide

Housing equipped and pre-wired with suspension lug, grip hook and four cover plates.

Equipped as follows: 3x single sockets with earthing pin 16 A/250 V with increased touch protection, pre-wired for an AC current, connection via 1x 3-pin terminal, 1x CEE socket 16 A/415 V, with partition for circuit separation.






VH-4 power supply unit, 4x protective contact socket, with compressed air connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VH-4L 4SD	Graphite black	1	428.600	6109812

PA Polyamide

Housing equipped and pre-wired, with 1 m pipe 1/2" and connection for compressed air hose 13 x 3.5 mm and 2-way distributor 1/2", with suspension lug, grip hook and four cover plates.

Equipped as follows: 4x single protective contact sockets 16 A/250 V with increased touch protection, pre-wired for two AC currents, connection via 2x 3-pin terminals, 1x CEE socket 16 A/415 V, with partition for circuit separation.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

VH - Prewired power supply units IP20

VH-4 power supply unit, 3x protective contact socket, 1x CEE 16 A, with compressed air connection





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VH-4L 3SD1C16	Graphite black	1	380.000	6109814


PA Polyamide

Housing equipped and pre-wired, with 1 m pipe 1/2" and connection for compressed air hose 13 x 3.5 mm and 2-way distributor 1/2", with suspension lug, grip hook and four cover plates.

Equipped as follows: 3x single protective contact sockets 16 A/250 V with increased touch protection, pre-wired for an AC current, connection via 1x 3-pin terminal, 1x CEE socket 16 A/415 V, with partition for circuit separation.

VH-4 power supply unit, 4x earthing pin socket, with compressed air connection





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VH-4L 4SF	Graphite black	1	428.600	6109816


PA Polyamide

Housing equipped and pre-wired, with 1 m pipe 1/2" and connection for compressed air hose 13 x 3.5 mm and 2-way distributor 1/2", with suspension lug, grip hook and four cover plates.

Equipped as follows: 4x single sockets with earthing pin 16 A/250 V with increased touch protection, pre-wired for two AC currents, connection via 2x 3-pin terminals, 1x CEE socket 16 A/415 V, with partition for circuit separation.

VH-4 power supply unit, 3x earthing pin socket, 1x CEE 16 A, with compressed air connection





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VH-4L 3SF1C16	Graphite black	1	440.000	6109818

PA Polyamide


Housing equipped and pre-wired, with 1 m pipe 1/2" and connection for compressed air hose 13 x 3.5 mm and 2-way distributor 1/2", with suspension lug, grip hook and four cover plates.

Equipped as follows: 3x single sockets with earthing pin 16 A/250 V with increased touch protection, pre-wired for an AC current, connection via 1x 3-pin terminal, 1x CEE socket 16 A/415 V, with partition for circuit separation.

VH - Empty housing and installation accessories IP20

VH-4 power supply unit, empty housing






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VH-4 LG	Graphite black	1	62.000	6109800

PA Polyamide

Empty housing with suspension lug and grip hook, for the installation of four electrical resources, with included partition. Without cover plates.

VH-4 power supply unit, empty housing, with compressed air connection





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VH-4L LG	Graphite black	1	343.800	6109810

PA Polyamide

Empty housing with 1 m pipe 1/2" and connection for compressed air hose 13 x 3.5 mm and 2-way distributor 1/2". With suspension lug and grip hook, for the installation of four electrical resources, with included partition. Without cover plates.

Always indicate the item number when ordering.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

VH-8 power supply unit, empty housing

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VH-8 LG	Graphite black	1	88.200	**6109821**

PA Polyamide

Empty housing with suspension lug and grip hook, for the installation of eight electrical resources, with included partition. Without cover plates.






VH-8 power supply unit, empty housing, with cover plates

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VH-8 LG8P2	Graphite black	1	123.400	**6109820**

PA Polyamide

Empty housing with suspension lug and grip hook, for the installation of eight electrical resources, with included partition. With eight cover plates for accessories with concealed support ring or support bracket.






VH-8 power supply unit, empty housing, with compressed air connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VH-8L LG	Graphite black	1	300.000	**6109825**

PA Polyamide

Empty housing with 1 m pipe 1/2" and connection for compressed air hose 13 x 3.5 mm and 2-way distributor 1/2". With suspension lug and grip hook, for the installation of electrical resources, with included partition. Without cover plates.







Partition VH-4

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VH-4 TW	Graphite black	1	2.350	**6109832**

PVC Polyvinylchloride

Additional partition wall for reciprocal insulation of three different power circuits and types. Version for VH-4.







Partition VH-8

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VH-8 TW	Graphite black	1	4.890	**6109862**

PVC Polyvinylchloride

Additional partition wall for reciprocal insulation of three different power circuits and types. Version for VH-8.






Cover plate VH, for EK and EKR devices

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VH-P2	Rape yellow	1	2.300	**6109834**

PA Polyamide

Cover plate with opening Ø 45 mm for the installation of a device with concealed support ring or support clamp.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Cover plate VH, for Modul 45 devices, single






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VH-P4	Rape yellow	1	2.030	**6109840**

PA Polyamide

Cover plate to install a single Modul 45 socket.

Cover plate VH, for Modul 45 devices, double






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VH-P5	Rape yellow	1	1.830	**6109836**

PA Polyamide

Cover plate to install a double Modul 45 socket.

Cover plate VH, for 1x extension socket, type ASD






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VH-P7	Rape yellow	1	1.890	**6109839**

PA Polyamide

Cover plate with opening for the installation of a socket with 38 x 38 mm fastening system.

Cover plate VH, for CEE connection unit





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VH-P3	Rape yellow	1	1.870	**6109838**


PA Polyamide

Cover plate with a Ø 70 mm opening for the installation of a CEE socket 16/32 A with 60 mm fastening track, including four fastening screws.

Information on equipment:
Max. 2 CEE sockets 16/32 A in a power supply unit VH-4
Max. 4 CEE sockets 16/32 A in a power supply unit VH-8

VH cover plate as blanking cover






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VH-P1	Rape yellow	1	3.000	**6109842**

PA Polyamide

Cover plate as blanking cover.

VH4 power supply unit, empty housing





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VH-4 LG RW	Pure white	1	72.000	**6109801**

PA Polyamide

Empty housing with suspension lug and grip hook, for the installation of four electrical resources, with included partition. Without cover plates.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Cover plate VH, for Modul 45 devices, single

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VH-P4 RW	Pure white	1	2.000	**6109841**

PA Polyamide

Cover plate to install a single Modul 45 socket.






Cover plate VH, for Modul 45 devices, double

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VH-P5 RW	Pure white	1	1.830	**6109835**

PA Polyamide

Cover plate to install a double Modul 45 socket.






Cover plate VH, for CEE connection unit

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VH-P3 RW	Pure white	1	2.000	**6109837**

PA Polyamide

Cover plate with a Ø 70 mm opening for the installation of a CEE socket 16/32 A with 60 mm fastening track, including four fastening screws.

Information on equipment:
Max. 2 CEE sockets 16/32 A in a power supply unit VH-4
Max. 4 CEE sockets 16/32 A in a power supply unit VH-8






VH cover plate as blanking cover

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VH-P1 RW	Pure white	1	3.000	**6109843**

PA Polyamide

Cover plate as blanking cover.





Partition VH-4

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VH-4 TW	Graphite black	1	2.350	**6109832**

PVC Polyvinylchloride

Additional partition wall for reciprocal insulation of three different power circuits and types. Version for VH-4.






Socket 0°, protective contact, single

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D0 RW1	Pure white	1	4.200	**6120008**

PC Polycarbonate

Protective contact socket single 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Socket 33°, protective contact, double






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D3 RW2	Pure white	1	7.800	**6120102**

PC Polycarbonate

Protective contact socket double 33°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

Socket 0°, with earthing pin, single






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F0 RW1	Pure white	1	4.000	**6120152**

PC Polycarbonate

Socket with earthing pin single 0°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V ~, with connection terminals to IEC 60884-1.

Socket 33°, with earthing pin, double






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F3 RW2	Pure white	1	7.500	**6120242**

PC Polycarbonate

Socket with earthing pin double 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V ~, with connection terminals to IEC 60884-1.

Data technology support, 1 module, slanting outlet, type C



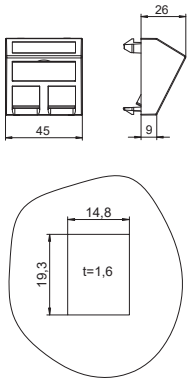


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTS-2C RW1	Pure white	1	1.500	**6119250**

PC Polycarbonate

The type C data technology support is suitable for accepting the following data connection modules: BTR (Keystone design): Cat. 6A module and UAE module; Corning: modules with Keystone seat; CobiNet: CobiDat KS module; Dätwyler: KS-T, KS-TS, MS-K and KU-T; EKU: E-Stone; Harting: Prelink Keystone Cat. 6A; Fixlink Keystone Cat. 6A; Komos: KDM 500 module; Leoni Kerpen: MegaLine-Connect45 Keystone socket modules; OBO: Type ASM-C6A and ASM-C6A G; R&M: Cat. 6A with Keystone fastening; Rutenbeck: UM and UMflex; SETEC: UKJ and XKJ; Telegärtner: AMJ and UMJ.

Connection module Cat. 6A, unshielded, snap-in





Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ASM-C6A	1	1.050	**6117348**

Connection module Cat. 6A (ISO) unshielded, with an RJ45 slot. Including a dust cover, a cable tie, a Keystone fastening frame and mounting instructions. Suitable for installation in the data technology supports of type DTG-2C and DTS-2C, support plate of type MTM 2C and MTM 3C, mounting plate of type MPR2 2C, mounting supports of type MTGE2 2C, MTGE2 15 2C and MTGE2 F 2C.


Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Connection module Cat. 6A, shielded, snap-in

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ASM-C6A G	1	1.630	**6117346**

Connection module Cat. 6A (ISO) shielded, with an RJ45 slot. Including an EMC screen hood, a dust cover, a cable tie, a Keystone fastening frame and mounting instructions. Suitable for installation in the data technology supports of type DTG-2C and DTS-2C, support plate of type MTM 2C and MTM 3C, mounting plate of type MPR2 2C, mounting supports of type MTGE2 2C, MTGE2 15 2C and MTGE2 F 2C.






Surface-mounted socket 0° with hinged cover, protective contact, single

Type	Designation	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ASD-D0 SW	prot. contact w. hinged cov.	Black	1	1.000	**6109873**

Protective contact extension socket 0° with hinged cover, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1. Protection rating: IP44.






CEE connection unit, 16 A

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
CEE-16A	1	19.100	**6109874**

CEE socket with 60 mm fastening track, 3-pin + N + PE, 400 V, 16 A, 6 h.






CEE connection unit, 32 A

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
CEE-32A	1	20.400	**6109876**

CEE socket with 60 mm fastening track, 3-pin + N + PE, 400 V, 32 A, 6 h.






VH-8 power supply unit, empty housing

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VHF-8 LG	Graphite black	1	105.000	**6109822**

PA Polyamide

Empty housing with suspension lug and grip hook, for the installation of electrical resources, with included partition. Without cover plates to supply workplaces in wet areas. Protection rating: IP44.






VH-8 power supply unit, empty housing, with compressed air connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VHF-8L LG	Graphite black	1	400.000	**6109827**

PA Polyamide

Empty housing with 1 m pipe 1/2" and connection for compressed air hose 13 x 3.5 mm and 2-way distributor 1/2". With suspension lug and grip hook, for the installation of electrical resources, with included partition. Without cover plates to supply workplaces in wet areas. Protection rating: IP44.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Partition VHF, without compressed air connection







Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VHF-TW	Graphite black	1	3.520	6109860

PVC Polyvinylchloride

Additional partition wall for reciprocal insulation of three different power circuits and types.

Partition VHF, with compressed air connection






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VHF-TW L	Graphite black	1	3.900	6109861

PVC Polyvinylchloride

Additional partition wall for reciprocal insulation of three different power circuits and types.

Cover plate VHF as blanking cover






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VHF-P1	Rape yellow	1	7.000	6109868

PVC Polyvinylchloride

Cover plate as blanking cover.

Cover plate VHF 1x with fastening system






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VHF-P7	Rape yellow	1	6.600	6109878

PVC Polyvinylchloride

Cover plate with opening for the installation of a socket with 38 x 38 mm fastening system.

Cover plate VHF, for 1x extension socket, type ASD






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VHF-P12	Rape yellow	1	7.400	6109856

PVC Polyvinylchloride

Cover plate with a Ø 45 mm opening for the installation of an extension socket (type ASD-...) with 38 mm fastening track, including 4 screws for fastening the device.

Cover plate VHF, for 2x extension socket, type ASD





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VHF-P8	Rape yellow	1	5.900	6109879

PVC Polyvinylchloride

Cover plate with two Ø 45 mm openings for the installation of two extension sockets (type ASD-...) with 38 mm fastening track, including 8 screws for fastening the device.

Always indicate the item number when ordering.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Cover plate VHF, for CEE connection unit

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VHF-P3	Rape yellow	1	7.000	**6109865**

PVC Polyvinylchloride

Cover plate with a Ø 70 mm opening for the installation of 1x CEE socket 16/32 A with 60 mm fastening track, including 4 screws for fastening the device.






Cover plate VHF, for 1x extension socket, type ASD and 1x CEE connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VHF-P13	Rape yellow	1	7.400	**6109858**

PVC Polyvinylchloride

Cover plate with a Ø 45 mm opening for the installation of one extension socket (type ASD-...) with 38 mm fastening track and a Ø 60 mm opening for the installation of one CEE socket 16/32 A with 60 mm fastening track, including 8 screws for fastening the device.






Cover plate VHF for protective equipment installation

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VHF-P6	Rape yellow	1	4.700	**6109867**

PVC Polyvinylchloride

Cover plate with cut out for the installation of a cover above protection unit (type VHF-AE4TE). Maximum equipment corresponds to four units.

Cover plate for the VHF power supply units for the installation of a cover above protection unit (type VHF-AE4TE). Maximum equipment corresponds to four units.






VHF protective unit construction, cover and support clamp

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
VHF-AE4TE	1	12.800	**6109850**

Cover and support clamp for the installation of protective equipment such as miniature circuit breakers or FI protection switches to max. four units.

Note: Use only in conjunction with the supports VHF-T1 or VHF-T2.







VHF protective unit construction, support with PE terminal strip

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
VHF-T1	1	6.730	**6109852**

St Steel

Support with PE terminal strip for installation of FI protection switches, consisting of:
- Base element with hat rail 35 mm and PE terminal strip 4 x 10 mm²
- Fastening material







VHF protective unit construction, support with N + PE terminal strip

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
VHF-T2	1	8.380	**6109854**

St Steel

Support with N and PE terminal strip for installation of miniature circuit-breakers, consisting of:
- Base element with hat rail 35 mm, N terminal strip 4 x 10 mm² and PE terminal strip 4 x 10 mm²
- Fastening material






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Surface-mounted socket 0° with hinged cover, protective contact, single






Type	Designation	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ASD-D0 SW	prot. contact w. hinged cov.	Black	1	1.000	**6109873**

Protective contact extension socket 0° with hinged cover, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1. Protection rating: IP44.

CEE connection unit, 16 A






Type	Pack. pcs	Weight kg/100 pcs.	Item No.
CEE-16A	1	19.100	**6109874**

CEE socket with 60 mm fastening track, 3-pin + N + PE, 400 V, 16 A, 6 h.

CEE connection unit, 32 A





Type	Pack. pcs	Weight kg/100 pcs.	Item No.
CEE-32A	1	20.400	**6109876**

CEE socket with 60 mm fastening track, 3-pin + N + PE, 400 V, 32 A, 6 h.

Fastening solutions for power supply units VH and VHF

Tension spring VH/VHF





Type	Pack. pcs	Weight kg/100 pcs.	Item No.
VH-F100VA	1	31.000	**6109829**

V2A Stainless steel, grade 301

Tension spring for VH/VHF power supply units, with German eyelet.

Fmax.= 100 N
L0 = 200 mm
Ln = 500 mm (for Fmax.)
Material: VA ø 3.0 mm

Knotted chain





Type	Designation	Pack. m	Weight kg/100 m	Item No.
VH-K800	Sold by the metre	1	20.000	**6109870**


St Steel

Knotted chain made of pre-copper-plated steel, nickel-plated, according to DIN 5686.
Max. tensile force: 800 N.

Note: Specify the required chain length during ordering.

Positioner for VH power supply units





Type	Designation	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VH-POS	Up to 6 kg load capacity	Orange	1	80.000	**6109887**

Positioner for variable height adjustment of a VH power supply unit, support load between 0.5 and 6.0 kg, maximum cable draw-out 1.5 m.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18



Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18



Underfloor systems

ACKERMANN
MADE BY OBO



Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/22 18:28:44 (LLExport_04579) / 2019/04/22

Always indicate the item number when ordering.



Underfloor systems

Screed-covered duct system, EUK

EÜK-SN screed-covered duct system

OKA open trunking system, in-screed

OKA-T open trunking system, screed-flush

OKB open trunking system, screed-flush

System 55 for thin screed layers

AIK on-floor installation trunking system

GES service outlets

Cassettes – height-adjustable and decouplable

Heavy-duty cassettes

UDHOME floor sockets

GES R2 floor sockets


Modul 45® and Standard – installation solutions for underfloor systems

Modul 45connect® – plug-in device installation solutions for raised and cavity floors


UFS fire protection systems

Directories


Gesamtkatalog_K1_UFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18



see page 284


see page 304


see page 310



see page 324


see page 326


see page 330



see page 336



see page 344


see page 356


see page 374


see page 388


see page 404


see page 414


see page 448


see page 460


see page 465

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18



EÜK screed-covered duct system

The EÜK screed-covered duct system from Ackermann made by OBO is the ideal electrical installation system for large areas with fixed furnishing plans, for example in office or administration buildings. Duct sections and underfloor boxes form a tight grid, hidden in the screed, for cable routing. When combined with device installation units, access is given to power, data and multimedia technology.




Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en | 2019/04/18 11:21:04 (LLExport 02579) / 2019/04/18

Always indicate the item number when ordering.

Underfloor installation duct, 2-compartment

Type	Width mm	Length mm	Number of compartments pc.	Pack. m	Weight kg/100 m	Item No.
S2 19028	190	2000	2	2	334.000	**7400300**
S2 25028	250	2000	2	2	410.000	**7400312**




St Steel

FS Strip-galvanised

Underfloor installation duct for laying cables under the floor.

Type	Dimension a mm	Dimension b mm	Dimension h mm	Cross-section draw a mm²	Cross-section draw b mm²
S2 19028	80	110	28	2028	2808
S2 25028	110	140	28	2808	3588



Underfloor installation duct, 3-compartment

Type	Width mm	Length mm	Number of compartments pc.	Pack. m	Weight kg/100 m	Item No.
S3 25028	250	2000	3	2	438.000	**7400324**
S3 35028	350	2000	3	2	561.000	**7400336**




St Steel

FS Strip-galvanised


Underfloor installation duct for laying cables under the floor.

Type	Dimension a mm	Dimension b mm	Dimension h mm	Cross-section draw a mm²	Cross-section draw b mm²
S3 25028	90	70	28	2288	1794
S3 35028	120	110	28	3068	2834



Connection shackle

Type	Dimension a mm	Trunking height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
VL 19028E	190	28	1	24.900	**7400960**
VL 25028E	250	28	1	32.300	**7400966**
VL 35028E	350	28	1	36.800	**7400972**





St Steel

FS Strip-galvanised


Duct connectors for conductive mounting of screed-covered underfloor installation duct.


Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Duct height 28 mm

Duct end closure piece






Type	Dimension a mm	Dimension h mm	Pack. pcs	Weight kg/100 pcs.	Item No.
SES 19027	190	27	1	7.100	**7403980**
SES 25027	250	27	1	8.800	**7404002**
SES 35027	350	27	1	10.300	**7404014**


St Steel

FS Strip-galvanised

End cap for screed-covered and flushfloor underfloor installation ducts.

Vertical bend, two-compartment






Type	Width mm	Number of compartments pc.	Pack. pcs	Weight kg/100 pcs.	Item No.
KV2 19028	190	2	1	160.000	**7400620**
KV2 25028	250	2	1	201.000	**7400632**


St Steel

FS Strip-galvanised

For vertical direction changes of screed-covered underfloor installation ducts (wall connections, supplies).

Vertical bend, three-compartment





Type	Width mm	Number of compartments pc.	Pack. pcs	Weight kg/100 pcs.	Item No.
KV3 25028	250	3	1	213.000	**7400644**
KV3 35028	350	3	1	275.000	**7400656**


St Steel

FS Strip-galvanised

For vertical direction changes of screed-covered underfloor installation ducts (wall connections, supplies).

Duct connection bracket (conductive)





Type	Pack. pcs	Weight kg/100 pcs.	Item No.
VW E	20	2.800	**7400980**

St Steel

FS Strip-galvanised


Connection brackets for the conductive connection between screed-covered duct and underfloor boxes UZD and UGD.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Underfloor installation duct, 2-compartment

Type	Width mm	Length mm	Number of compartments pc.	Pack. m	Weight kg/100 m	Item No.
S2 19038	190	2000	2	2	349.000	**7400304**
S2 25038	250	2000	2	2	427.000	**7400316**




St Steel

FS Strip-galvanised


Underfloor installation duct for laying cables under the floor.

Type	Dimension a mm	Dimension b mm	Dimension h mm	Cross-section draw a mm²	Cross-section draw b mm²
S2 19038	80	110	38	2808	3888
S2 25038	110	140	38	3888	4968



Underfloor installation duct, 3-compartment

Type	Width mm	Length mm	Number of compartments pc.	Pack. m	Weight kg/100 m	Item No.
S3 25038	250	2000	3	2	466.000	**7400328**
S3 35038	350	2000	3	2	595.000	**7400340**




St Steel

FS Strip-galvanised


Underfloor installation duct for laying cables under the floor.

Type	Dimension a mm	Dimension b mm	Dimension h mm	Cross-section draw a mm²	Cross-section draw b mm²
S3 25038	90	70	38	3168	2484
S3 35038	120	110	38	4248	3924



Connection shackle

Type	Dimension a mm	Trunking height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
VL 19038E	190	38	1	25.800	**7400962**
VL 25038E	250	38	1	33.100	**7400968**
VL 35038E	350	38	1	40.400	**7400974**





St Steel

FS Strip-galvanised


Duct connectors for conductive mounting of screed-covered underfloor installation duct.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Duct height 38 mm

Duct end closure piece





Type	Dimension a mm	Dimension h mm	Pack. pcs	Weight kg/100 pcs.	Item No.
SES 19037	190	37	1	9.500	**7403984**
SES 25037	250	37	1	11.700	**7404006**
SES 35037	350	37	1	14.400	**7404018**


St Steel

FS Strip-galvanised

End cap for screed-covered and flushfloor underfloor installation ducts.

Vertical bend, two-compartment






Type	Width mm	Number of compartments pc.	Pack. pcs	Weight kg/100 pcs.	Item No.
KV2 19038	190	2	1	170.000	**7400624**
KV2 25038	250	2	1	210.000	**7400636**


St Steel

FS Strip-galvanised

For vertical direction changes of screed-covered underfloor installation ducts (wall connections, supplies).

Vertical bend, three-compartment





Type	Width mm	Number of compartments pc.	Pack. pcs	Weight kg/100 pcs.	Item No.
KV3 25038	250	3	1	223.000	**7400648**
KV3 35038	350	3	1	286.000	**7400660**


St Steel

FS Strip-galvanised

For vertical direction changes of screed-covered underfloor installation ducts (wall connections, supplies).

Duct connection bracket (conductive)





Type	Pack. pcs	Weight kg/100 pcs.	Item No.
VW E	20	2.800	**7400980**

St Steel

FS Strip-galvanised


Connection brackets for the conductive connection between screed-covered duct and underfloor boxes UZD and UGD.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Underfloor installation duct, 2-compartment

Type	Width mm	Length mm	Number of compartments pc.	Pack. m	Weight kg/100 m	Item No.
S2 19048	190	2000	2	2	376.000	**7400308**
S2 25048	250	2000	2	2	451.000	**7400320**




St Steel

FS Strip-galvanised


Underfloor installation duct for laying cables under the floor.

Type	Dimension a mm	Dimension b mm	Dimension h mm	Cross-section draw a mm²	Cross-section draw b mm²
S2 19048	80	110	48	3588	4968
S2 25048	110	140	48	4968	6348



Underfloor installation duct, 3-compartment

Type	Width mm	Length mm	Number of compartments pc.	Pack. m	Weight kg/100 m	Item No.
S3 25048	250	2000	3	2	500.000	**7400332**
S3 35048	350	2000	3	2	607.000	**7400344**




St Steel

FS Strip-galvanised


Underfloor installation duct for laying cables under the floor.

Type	Dimension a mm	Dimension b mm	Dimension h mm	Cross-section draw a mm²	Cross-section draw b mm²
S3 25048	90	70	48	4048	3174
S3 35048	120	110	48	5428	5014



Connection shackle

Type	Dimension a mm	Trunking height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
VL 19048E	190	48	1	26.600	**7400964**
VL 25048E	250	48	1	34.000	**7400970**
VL 35048E	350	48	1	41.200	**7400976**





St Steel

FS Strip-galvanised


Duct connectors for conductive mounting of screed-covered underfloor installation duct.


Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Duct height 48 mm

Duct end closure piece






Type	Dimension a mm	Trunking height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
SES 19047	190	48	1	12.500	**7403988**
SES 25047	250	48	1	16.000	**7404010**
SES 35047	350	48	1	17.900	**7404022**


St Steel

FS Strip-galvanised

End cap for screed-covered and flushfloor underfloor installation ducts.

Vertical bend, two-compartment






Type	Width mm	Number of compartments pc.	Pack. pcs	Weight kg/100 pcs.	Item No.
KV2 19048	190	2	1	176.000	**7400628**
KV2 25048	250	2	1	215.000	**7400640**


St Steel

FS Strip-galvanised

For vertical direction changes of screed-covered underfloor installation ducts (wall connections, supplies).

Vertical bend, three-compartment





Type	Width mm	Number of compartments pc.	Pack. pcs	Weight kg/100 pcs.	Item No.
KV3 25048	250	3	1	233.000	**7400652**
KV3 35048	350	3	1	296.000	**7400664**


St Steel

FS Strip-galvanised

For vertical direction changes of screed-covered underfloor installation ducts (wall connections, supplies).

Duct connection bracket (conductive)





Type	Pack. pcs	Weight kg/100 pcs.	Item No.
VW E	20	2.800	**7400980**

St Steel


FS Strip-galvanised

Connection brackets for the conductive connection between screed-covered duct and underfloor boxes UZD and UGD.

Accessories, underfloor installation ducts

Duct connection bracket (conductive)





Type	Pack. pcs	Weight kg/100 pcs.	Item No.
VW E	20	2.800	**7400980**

St Steel

FS Strip-galvanised

Connection brackets for the conductive connection between screed-covered duct and underfloor boxes UZD and UGD.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.

Fire protection screw tie

Type	Dimension mm	Anchor length mm	Bore hole Ø mm	Pack. pcs	Weight kg/100 pcs.	Item No.
MMS-plus 6X50	6 x 50	50	5	100	1.000	**3498108**
MMS-plus 6X35	6 x 50	50	5	100	0.900	**3498103**

St Steel

G Electrogalvanised





Fire protection screw tie with pan head for direct installation without additional anchors. Drive T30, drill hole 5 mm. Tested anchor according to ETAG 001 – Part 3. Fire resistance class to R120 for concrete and masonry.


Substrate

The bolt ties are suitable for screwing into the following types of masonry:
- Calcareous sandstone - Full brick (KSV)
- Calcareous sandstone - Hollow brick (KSL)
- Whole brick (Vz)

OBO anchor

Type	Shank length mm	Flange-Ø mm	Shipping box pcs	Pack. pcs	Weight kg/100 pcs.	Item No.
903 RB 15	15	10	6000	200	0.295	**3105016**
903 RB 18	18	10	4000	200	0.348	**3105024**
903 RB 22	22	10	4000	200	0.325	**3105032**

St Steel






Hardened steel, shiny without thread.

Flattener with hand protection

Type	Shipping box pcs	Pack. pcs	Weight kg/100 pcs.	Item No.
915 RBS M4	5	1	52.000	**3031500**

St Steel






Flattener with hand protection for OBO anchors 903/RB Ø 4 mm and also for OBO anchors 904 with M4 thread.

Knock-in anchor

Type	Dowel Ø mm	Length mm	Shipping box pcs	Pack. pcs	Weight kg/100 pcs.	Item No.
910 SD 6X40	6	40	1000	100	0.555	**2351064**

PA Polyamide





Knock-in anchor: steel, electrogalvanised and transparently passivated.


Underfloor box 250-3


UZD250-3 for screed height 70–125 mm

Type	Dimension A mm	Dimension B mm	Dimension a mm	Dimension b mm	Screed height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UZD 250-3	367	410	262	283	70 - 125	1	420.000	**7410030**

St Steel

FS Strip-galvanised





Underfloor junction and branch box for screed-covered underfloor installation systems.


Side walls are prepared for duct widths 190 and 250 mm.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Underfloor box 250-3

UZD250-3 for screed height 115–170 mm





Type	Dimension A mm	Dimension B mm	Dimension a mm	Dimension b mm	Screed height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UZD 115170 250-3	367	410	262	283	115 - 170	1	480.000	**7410043**


St Steel


FS Strip-galvanised

Underfloor junction and branch box for screed-covered underfloor installation systems.

Side walls prepared for duct width 250 mm.

UZD250-3 for screed height 165–220 mm





Type	Dimension A mm	Dimension B mm	Dimension a mm	Dimension b mm	Screed height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UZD 165220 250-3	367	410	262	283	165 - 220	1	530.000	**7410052**


St Steel


FS Strip-galvanised

Underfloor junction and branch box for screed-covered underfloor installation systems.

Side walls prepared for duct width 250 mm.

UZD250-3 with pipe entry for screed height 70–125 mm






Type	Dimension A mm	Dimension B mm	Dimension a mm	Dimension b mm	Screed height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UZD 250-3 R	367	410	262	283	70 - 125	1	436.000	**7410031**


St Steel

FS Strip-galvanised

Underfloor junction and branch box for screed-covered underfloor installation systems with pipe insertion openings M20 and M32.

UGD250-3 for rectangular installation units, for screed height 70–125 mm





Type	Dimension A mm	Dimension B mm	Dimension a mm	Dimension b mm	Screed height mm	Nominal size	Pack. pcs	Weight kg/100 pcs.	Item No.
UGD 250-3 4	367	410	201	201	70 - 125	4	1	594.000	**7410079**
UGD 250-3 6	367	410	201	253	70 - 125	6	1	584.000	**7410083**
UGD 250-3 9	367	410	244	244	70 - 125	9	1	580.000	**7410087**


St Steel


FS Strip-galvanised

Underfloor box for direct installation of device installation units with mounting lid and lid blanking plate for screed-covered underfloor installation systems.

Side walls are prepared for duct widths 190 and 250 mm.

UGD250-3 for round installation units, for screed height 70–125 mm





Type	Dimension A mm	Dimension B mm	Dimension d Ø mm	Screed height mm	Nominal size	Pack. pcs	Weight kg/100 pcs.	Item No.
UGD 250-3R4	367	410	215	70 - 125	R4	1	594.000	**7410091**

St Steel

FS Strip-galvanised

Underfloor box for direct installation of device installation units with mounting lid and lid blanking plate for screed-covered underfloor installation systems.

Side walls are prepared for duct widths 190 and 250 mm.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.


Height compensation set for UZD/UGD250-3 with height 70–125 mm

Type	Screed height mm	Dimension A mm	Dimension B mm	Dimension l mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ASH250-3 B115170	115 - 170	330	80	112	1	76.500	**7410142**
ASH250-3 B165220	165 - 220	330	130	162	1	120.000	**7410148**

St Steel

FS Strip-galvanised

Height compensation set for underfloor boxes UZD250-3 and UGD250-3 with a construction height of 70 to 125 mm for construction stacking of the UZD/UGD, consisting of four fall plates, four height adjustment screws and four rotary locks.






Height compensation set for UZD250-3 with height 115–170 mm


Type	Screed height mm	Dimension A mm	Dimension B mm	Dimension l mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ASH250-3 165220	165 - 220	330	80	162	1	82.000	**7410146**

St Steel

FS Strip-galvanised

Height compensation set for underfloor boxes UZD250-3 with a construction height of 115 to 170 mm for construction stacking of the UZD/UGD, consisting of four fall plates, four height adjustment screws and four rotary locks.






Height compensation set for UZD250-3 with height 165–220 mm


Type	Screed height mm	Dimension A mm	Dimension B mm	Dimension l mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ASH250-3 215270	215 - 270	330	80	212	1	85.000	**7410158**
ASH250-3 265320	265 - 320	330	130	262	1	127.000	**7410162**

St Steel

FS Strip-galvanised

Height compensation set for underfloor boxes UZD250-3 with a construction height of 165 to 220 mm for construction stacking of the UZD/UGD, consisting of four fall plates, four height adjustment screws and four rotary locks.






UZD/UGD 250 underfloor connection sockets


Type	Dimension A mm	Dimension B mm	Dimension a mm	Dimension b mm	Screed height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UZD 170 250-3 R	367	410	262	283	115 - 170	1	480.000	**7410045**

St Steel

FS Strip-galvanised

Underfloor junction and branch box for screed-covered underfloor installation systems with pipe insertion openings M20 and M32.






Blanking lid for UZD250-3


Type	Dimension A mm	Pack. pcs	Weight kg/100 pcs.	Item No.
DU 250-2	282	1	250.000	**7400573**

St Steel

FS Strip-galvanised

Blanking lid for frameless end cover of the underfloor junction and branch boxes of type UZD250-3.







Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Mounting lid 250 for installation units of nominal size 2





Type	Dimension A mm	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
DUG 250-3 2	282	105	181	1	180.000	**7400455**


St Steel

FS Strip-galvanised

Mounting lid for underfloor junction and branch box of type UZD250-3 for the installation of a installation unit of nominal size 2. Installation opening 3 mm recessed for later blanking lock with lid blind plate.

Mounting lid 250 for installation units of nominal size 4






Type	Dimension A mm	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
DUG 250-3 4	282	201	1	121.000	**7400459**


St Steel

FS Strip-galvanised

Mounting lid for underfloor junction and branch box of type UZD250-3 for the installation of a installation unit of nominal size 4. Installation opening 3 mm recessed for later blanking lock with lid blind plate.

Mounting lid 250 for installation units of nominal size R4






Type	Dimension A mm	Dimension d Ø mm	Pack. pcs	Weight kg/100 pcs.	Item No.
DUG 250-3 R4	282	215	1	131.000	**7400471**


St Steel

FS Strip-galvanised

Mounting lid for underfloor junction and branch boxes of type UZD250-3 for the installation of an installation unit of nominal size R4. Installation opening 3 mm recessed as a later blanking lock with lid blind plate.

Mounting lid 250 for installation units of nominal size 6





Type	Dimension A mm	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
DUG 250-3 6	282	201	253	1	89.000	**7400463**


St Steel

FS Strip-galvanised

Mounting lid for underfloor junction and branch box of type UZD250-3 for the installation of a installation unit of nominal size 6. Installation opening 3 mm recessed for later blanking lock with lid blind plate.

Mounting lid 250 for installation units of nominal size 9





Type	Dimension A mm	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
DUG 250-3 9	282	244	1	62.000	**7400467**

St Steel

FS Strip-galvanised

Mounting lid for underfloor junction and branch box of type UZD250-3 for the installation of a installation unit of nominal size 9. Installation opening 3 mm recessed for later blanking lock with lid blind plate.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.


Mounting lid 250 for installation units of nominal size RM2


Type	Dimension A mm	Dimension d Ø mm	Pack. pcs	Weight kg/100 pcs.	Item No.
DUG 250-3 RM2	282	120	1	249.000	**7400501**
DUG 350-3 RM2	383	120	1	466.000	**7400502**

St Steel

FS Strip-galvanised

Blanking lid for underfloor junction and branch box of type UZD250-3 for the installation of a GESRM2 installation unit.





UZD350-3 for screed height 70–125 mm


Type	Dimension A mm	Dimension B mm	Dimension a mm	Dimension b mm	Screed height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UZD 350-3	467	510	362	383	70 - 125	1	590.000	**7410034**


St Steel

FS Strip-galvanised

Underfloor junction and branch box for screed-covered underfloor installation systems.

Side walls prepared for duct widths of 190, 250 and 350 mm.





UZD350-3 for screed height 115–170 mm


Type	Dimension A mm	Dimension B mm	Dimension a mm	Dimension b mm	Screed height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UZD 115170 350-3	467	510	362	383	115 - 170	1	665.000	**7410047**


St Steel

FS Strip-galvanised

Underfloor junction and branch box for screed-covered underfloor installation systems.

Side walls prepared for duct widths 250 and 350 mm.





UZD350-3 for screed height 165–220 mm


Type	Dimension A mm	Dimension B mm	Dimension a mm	Dimension b mm	Screed height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UZD 165220 350-3	467	510	362	383	165 - 220	1	740.000	**7410056**


St Steel

FS Strip-galvanised

Underfloor junction and branch box for screed-covered underfloor installation systems.

Side walls prepared for duct widths 250 and 350 mm.






UZD350-3 with pipe entry for screed height 70–125 mm


Type	Dimension A mm	Dimension B mm	Dimension a mm	Dimension b mm	Screed height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UZD 350-3 R	467	510	362	383	70 - 125	1	590.000	**7410035**

St Steel

FS Strip-galvanised

Underfloor junction and branch box for screed-covered underfloor installation systems with pipe insertion openings M20 and M32.







Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

UGD350-3 for rectangular installation units, for screed height 70–125 mm





Type	Dimension A mm	Dimension B mm	Dimension a mm	Dimension b mm	Screed height mm	Nominal size	Pack. pcs	Weight kg/100 pcs.	Item No.
UGD 350-3 4	467	510	201	201	70 - 125	4	1	910.000	**7410104**
UGD 350-3 6	467	510	201	253	70 - 125	6	1	898.000	**7410108**
UGD 350-3 9	467	510	244	244	70 - 125	9	1	895.000	**7410112**


St Steel


FS Strip-galvanised

Underfloor box for direct installation of device installation units with mounting lid and lid blanking plate for screed-covered underfloor installation systems.

Side walls prepared for duct widths of 190, 250 and 350 mm.

UGD350-3 for round installation units, for screed height 70–125 mm





Type	Dimension A mm	Dimension B mm	Dimension d Ø mm	Screed height mm	Nominal size	Pack. pcs	Weight kg/100 pcs.	Item No.
UGD 350-3 R4	467	510	215	70 - 125	R4	1	910.000	**7410116**
UGD 350-3 R7	467	510	275	70 - 125	R7	1	887.000	**7410120**
UGD 350-3 R9	467	510	305	70 - 125	R9	1	880.000	**7410124**


St Steel


FS Strip-galvanised

Underfloor box for direct installation of device installation units with mounting lid and lid blanking plate for screed-covered underfloor installation systems.

Side walls prepared for duct widths of 190, 250 and 350 mm.

Height compensation set for UZD/UGD350-3 with height 70–125 mm






Type	Screed height mm	Dimension A mm	Dimension B mm	Dimension I mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ASH350-3 B115170	115 - 170	430	80	112	1	97.000	**7410150**
ASH350-3 B165220	165 - 220	430	130	162	1	151.500	**7410156**


St Steel

FS Strip-galvanised

Height compensation set for underfloor boxes UZD350-3 and UGD350-3 with a construction height of 70 to 125 mm for construction stacking of the UZD/UGD, consisting of four fall plates, four height adjustment screws and four rotary locks.

Height compensation set for UZD350-3 with height 115–170 mm






Type	Screed height mm	Dimension A mm	Dimension B mm	Dimension I mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ASH350-3 165220	165 - 220	430	80	162	1	102.500	**7410154**


St Steel

FS Strip-galvanised

Height compensation set for underfloor boxes UZD350-3 with a construction height of 115 to 170 mm for construction stacking of the UZD/UGD, consisting of four fall plates, four height adjustment screws and four rotary locks.

Height compensation set for UZD350-3 with height 165–220 mm





Type	Screed height mm	Dimension A mm	Dimension B mm	Dimension I mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ASH350-3 215270	215 - 270	430	80	212	1	105.000	**7410164**
ASH350-3 265320	265 - 320	430	130	262	1	159.000	**7410166**

St Steel

FS Strip-galvanised

Height compensation set for underfloor boxes UZD350-3 with a construction height of 165 to 220 mm for construction stacking of the UZD/UGD, consisting of four fall plates, four height adjustment screws and four rotary locks.

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


UZD/UGD 350 underfloor connection sockets


Type	Dimension A mm	Dimension B mm	Dimension a mm	Dimension b mm	Screed height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UZD 170 350-3 R	467	510	362	383	115 - 170	1	600.000	**7410048**

St Steel

FS Strip-galvanised

Underfloor junction and branch box for screed-covered underfloor installation systems with pipe insertion openings M20 and M32.






Blanking lid for UZD350-3


Type	Dimension A mm	Pack. pcs	Weight kg/100 pcs.	Item No.
DU 350-2	383	1	440.000	**7400577**

St Steel

FS Strip-galvanised

Blanking lid for frameless end cover of the underfloor junction and branch boxes of type UZD350-3.






Mounting lid 350 for Telitank


Type	Dimension A mm	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
DUF 350-3 DAT	383	100	1	455.000	**7400431**

St Steel

FS Strip-galvanised

Mounting lid for underfloor junction and branch box of type UZD350-3 to install a Telitank. Installation opening 3 mm recessed as a later blanking lock with lid blanking plate.






Mounting lid 350 for installation units of nominal size 4

Type	Dimension A mm	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
DUG 350-3 4	383	201	1	320.000	**7400505**

St Steel

FS Strip-galvanised

Mounting lid for underfloor junction and branch box of type UZD350-3 for the installation of a installation unit of nominal size 4. Installation opening 3 mm recessed for later blanking lock with lid blanking plate.






Mounting lid 350 for installation units of nominal size R4


Type	Dimension A mm	Dimension d Ø mm	Pack. pcs	Weight kg/100 pcs.	Item No.
DUG 350-3 R4	383	215	1	335.000	**7400517**

St Steel

FS Strip-galvanised

Mounting lid for underfloor junction and branch boxes of type UZD350-2 for the installation of an installation unit of nominal size R4. Installation opening 3 mm recessed as a later blanking lock with lid blanking plate.







Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Underfloor box 350-3

Mounting lid 350 for installation units of nominal size 6





Type	Dimension A mm	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
DUG 350-3 6	383	201	253	1	290.000	**7400509**


St Steel

FS Strip-galvanised

Mounting lid for underfloor junction and branch box of type UZD350-3 for the installation of a installation unit of nominal size 6. Installation opening 3 mm recessed for later blanking lock with lid blanking plate.

Mounting lid 350 for installation units of nominal size R7





Type	Dimension A mm	Dimension d Ø mm	Pack. pcs	Weight kg/100 pcs.	Item No.
DUG 350-3 R7	383	275	1	260.000	**7400533**


St Steel

FS Strip-galvanised

Mounting lid for underfloor junction and branch boxes of type UZD350-3 for the installation of an installation unit of nominal size R7. Installation opening 3 mm recessed as a later blanking lock with lid blanking plate.

Mounting lid 350 for installation units of nominal size 9





Type	Dimension A mm	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
DUG 350-3 9	383	244	1	267.000	**7400513**


St Steel

FS Strip-galvanised

Mounting lid for underfloor junction and branch box of type UZD350-3 for the installation of a installation unit of nominal size 9. Installation opening 3 mm recessed for later blanking lock with lid blanking plate.

Mounting lid 350 for installation units of nominal size R9





Type	Dimension A mm	Dimension d Ø mm	Pack. pcs	Weight kg/100 pcs.	Item No.
DUG 350-3 R9	383	305	1	230.000	**7400549**

St Steel


FS Strip-galvanised

Mounting lid for underfloor junction and branch boxes of type UZD350-3 for the installation of an installation unit of nominal size R9. Installation opening 3 mm recessed as a later blanking lock with lid blanking plate.

Accessories for underfloor connection sockets

Quick release aid





Type	Pack. pcs	Weight kg/100 pcs.	Item No.
SE UZD3	4	1.700	**7410160**

Quick release aid for underfloor boxes UZD-3 and UGD-3

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.


Lid fastening screw

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
DBS DUG	20	0.150	**7400559**

St Steel

G Electrogalvanised

Lid fastening screws for underfloor sockets UZD-3 and UGD-3.






Lid blind plate for rectangular mounting opening


Type	Dimension A mm	Dimension B mm	Nominal size	Pack. pcs	Weight kg/100 pcs.	Item No.
DUG B 2	109	185	2	1	47.200	**7407164**
DUG B 4	205	205	4	1	98.500	**7407168**
DUG B 6	205	258	6	1	123.400	**7407172**
DUG B 9	247	247	9	1	142.400	**7407180**

St Steel

FS Strip-galvanised

Lid blind plate for flushfloor closing of a rectangular mounting opening in a DUG mounting lid. The size of the mounting opening can be determined from the type designation.






Lid blind plate for round mounting opening


Type	Dimension d Ø mm	Nominal size	Pack. pcs	Weight kg/100 pcs.	Item No.
DUG B R4	219	R4	1	88.500	**7407152**
DUG B R7	279	R7	1	142.800	**7407156**
DUG B R9	309	R9	1	173.100	**7407160**

St Steel

FS Strip-galvanised

Lid blind plate for flushfloor closing of a round mounting opening in a DUG mounting lid. The size of the mounting opening can be determined from the type designation.





Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.



EÜK-SN screed-covered duct system

The EÜK-SN screed-covered duct system from Ackermann made by OBO is the ideal electrical installation system for large areas with fixed furnishing plans, for example in office or administration buildings. Duct sections and underfloor boxes form a tight grid, hidden in the screed, for cable routing. When combined with device installation units, access is given to power, data and multimedia technology.

Single-compartment PVC duct systems, multi-compartment metal ducts and installation pipes are suitable for cable routing beneath screed layers.

OBO BETTERMANN

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18


Underfloor box UDS4 for PVC duct

Type	Screed height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDSPD 9035 4	65 - 90	1	246.000	**7400348**

St Steel

FS Strip-galvanised

Underfloor outlet box with fixed, unchangeable 201 x 201 mm installation opening for an installation unit of nominal size 4. The mounting opening is created using the screed protection cover contained in the scope of supply. The underfloor box possesses installation openings for three single-compartment PVC ducts of nominal size 60 x 25 and 90 x 35 on all four sides. The box is principally suited for use in floor structures in cement screed with a structure height of up to 90 mm.






Underfloor box UDS6 for PVC duct

Type	Screed height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDSPD 9035 6	65 - 90	1	231.000	**7400350**

St Steel

FS Strip-galvanised

Underfloor outlet box with fixed, unchangeable 202 x 254 mm installation opening for an installation unit of nominal size 6. The mounting opening is created using the screed protection cover contained in the scope of supply. The underfloor box possesses installation openings for three single-compartment PVC ducts of nominal size 60 x 25 and 90 x 35 on all four sides. The box is principally suited for use in floor structures in cement screed with a structure height of up to 90 mm.






Underfloor box UDS9 for PVC duct

Type	Screed height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDSPD 9035 9	65 - 100	1	225.000	**7400352**

St Steel

FS Strip-galvanised

Underfloor outlet box with fixed, unchangeable 244 x 244 mm installation opening for an installation unit of nominal size 9. The mounting opening is created using the screed protection cover contained in the scope of supply. The underfloor box possesses installation openings for three single-compartment PVC ducts of nominal size 60 x 25 and 90 x 35 on all four sides. The box is principally suited for use in floor structures in cement screed with a structure height of up to 100 mm.






Underfloor box UDSR4 for PVC duct


Type	Screed height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDSPD 9035 R4	65 - 90	1	217.000	**7400354**

St Steel

FS Strip-galvanised

Underfloor outlet box with fixed, unchangeable installation opening of Ø 215 mm for an installation unit of nominal size R4. The mounting opening is created using the screed protection cover contained in the scope of supply. The underfloor box possesses installation openings for three single-compartment PVC ducts of nominal size 60 x 25 and 90 x 35 on all four sides. The box is principally suited for use in floor structures in cement screed with a structure height of up to 90 mm.






Underfloor box UDSR9 for PVC duct

Type	Screed height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDSPD 9035 R9	65 - 95	1	236.000	**7400358**

St Steel

FS Strip-galvanised

Underfloor outlet box with fixed, unchangeable installation opening of Ø 305 mm for an installation unit of nominal size R9. The mounting opening is created using the screed protection cover contained in the scope of supply. The underfloor box possesses installation openings for three single-compartment PVC ducts of nominal size 60 x 25 and 90 x 35 on all four sides. The box is principally suited for use in floor structures in cement screed with a structure height of up to 95 mm.






Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Underfloor outlet box UDSPD for PVC ducts, self-levelling

Underfloor installation duct, 3-compartment




Type	Width mm	Length mm	Number of compartments pc.	Pack. m	Weight kg/100 m	Item No.
S3 25038	250	2000	3	2	466.000	**7400328**

St Steel

FS Strip-galvanised


Underfloor installation duct for laying cables under the floor.



Type	Dimension a mm	Dimension b mm	Dimension h mm	Cross-section draw a mm²	Cross-section draw b mm²
S3 25038	90	70	38	3168	2484

Connection shackle






Type	Dimension a mm	Trunking height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
VL 25038E	250	38	1	33.100	**7400968**


St Steel

FS Strip-galvanised

Duct connectors for conductive mounting of screed-covered underfloor installation duct.

Duct end closure piece






Type	Dimension a mm	Dimension h mm	Pack. pcs	Weight kg/100 pcs.	Item No.
SES 25037	250	37	1	11.700	**7404006**


St Steel

FS Strip-galvanised

End cap for screed-covered and flushfloor underfloor installation ducts.

Vertical bend, three-compartment





Type	Width mm	Number of compartments pc.	Pack. pcs	Weight kg/100 pcs.	Item No.
KV3 25038	250	3	1	223.000	**7400648**

St Steel

FS Strip-galvanised

For vertical direction changes of screed-covered underfloor installation ducts (wall connections, supplies).

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.


Underfloor box UDS4 for installation pipe and metal duct

Type	Screed height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDSSD 25038 4	65 - 90	1	277.400	**7400349**

St Steel

FS Strip-galvanised

Underfloor outlet box with fixed, unchangeable 201 x 201 mm installation opening for an installation unit of nominal size 4. The mounting opening is created using the screed protection cover contained in the scope of supply. The underfloor box possesses installation openings for a 2 or 3-compartment sheet steel underfloor duct of nominal size 25038 as well as six M20 or M25 installation pipes on all four sides. The box is principally suited for use in floor structures in cement screed with a structure height of up to 90 mm.






Underfloor box UDS6 for installation pipe and metal duct

Type	Screed height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDSSD 25038 6	65 - 90	1	232.000	**7400351**

St Steel

FS Strip-galvanised

Underfloor outlet box with fixed, unchangeable 202 x 254 mm installation opening for an installation unit of nominal size 6. The mounting opening is created using the screed protection cover contained in the scope of supply. The underfloor box possesses installation openings for a 2 or 3-compartment sheet steel underfloor duct of nominal size 25038 as well as six M20 or M25 installation pipes on all four sides. The box is principally suited for use in floor structures in cement screed with a structure height of up to 90 mm.






Underfloor box UDS9 for installation pipe and metal duct

Type	Screed height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDSSD 25038 9	65 - 100	1	226.000	**7400353**

St Steel

FS Strip-galvanised

Underfloor outlet box with fixed, unchangeable 244 x 244 mm installation opening for an installation unit of nominal size 9. The mounting opening is created using the screed protection cover contained in the scope of supply. The underfloor box possesses installation openings for a 2 or 3-compartment sheet steel underfloor duct of nominal size 25038 as well as six M20 or M25 installation pipes on all four sides. The box is principally suited for use in floor structures in cement screed with a structure height of up to 90 mm.






Underfloor box UDSR4 for installation pipe and metal duct

Type	Dimension d Ø mm	Screed height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDSSD 25038 R4	215	65 - 90	1	224.500	**7400355**

St Steel

FS Strip-galvanised

Underfloor outlet box with fixed, unchangeable installation opening of Ø 215 mm for an installation unit of nominal size R4. The mounting opening is created using the screed protection cover contained in the scope of supply. The underfloor box possesses installation openings for a 2 or 3-compartment sheet steel underfloor duct of nominal size 25038 as well as six M20 or M25 installation pipes on all four sides. The box is principally suited for use in floor structures in cement screed with a structure height of up to 90 mm.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Underfloor outlet box for metal ducts, self-levelling

Underfloor box UDSR9 for installation pipe and metal duct





Type	Dimension d Ø mm	Screed height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDSSD 25038 R9	305	65 - 95	1	229.000	**7400359**


St Steel

FS Strip-galvanised

Underfloor outlet box with fixed, unchangeable installation opening of Ø 305 mm for an installation unit of nominal size R9. The mounting opening is created using the screed protection cover contained in the scope of supply. The underfloor box possesses installation openings for a 2 or 3-compartment sheet steel underfloor duct of nominal size 25038 as well as six M20 or M25 installation pipes on all four sides. The box is principally suited for use in floor structures in cement screed with a structure height of up to 95 mm.

Underfloor box UGE2 for installation pipe and metal duct





Type	Screed height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UGE 2C	70 - 90	1	74.100	**7428062**

St Steel

FS Strip-galvanised

Underfloor outlet box with fixed, unchangeable 106 x 182 mm installation opening for an installation unit of nominal size 2. The mounting opening is created using the screed protection cover contained in the scope of supply. The underfloor box has two openings for M20 conduit on the narrow sides. The underfloor box is suitable for screed floor constructions with height 70 mm up to 90 mm.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.



Open trunking system, screed-flush OKA

The OKA open trunking system is a flexible system for in-screed cable routing. The trunking lids can also be opened along the whole length – even when installed with a floor covering. This means that the electrical installation in the trunking can be adapted at any time. Additional mounting benefits, such as lowerable floor covering profiles or rapid height-adjustment units, offer a great deal of flexibility and security for professional underfloor installations.




Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Weboptim | en | 2019/04/22 18:28:44 18:28:44 (LLExport_02579) / 2019/04/22

Open trunking system, screed-flush OKA

- Trunking side walls made of flexible metal mesh
- Good adjustment to uneven floors
- Combination option of the OKA-G and OKA-W systems
- For dry and wet-cleaned floors

ACKERMANN MADE BY OBO

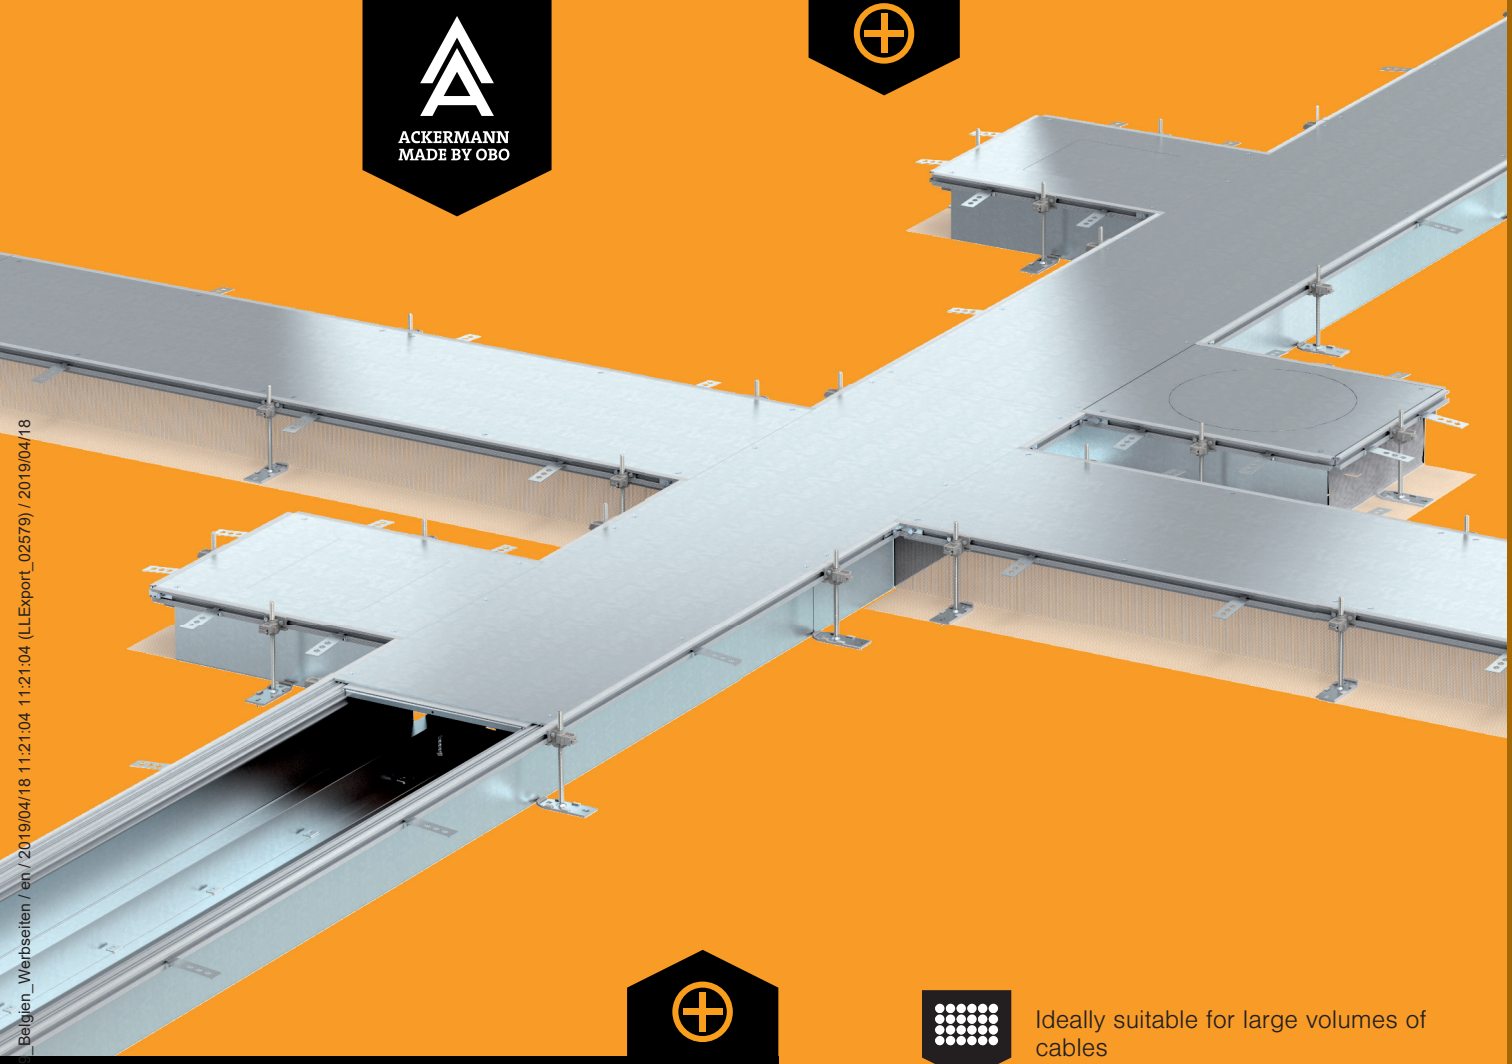

- Screw-on or lockable lid
- High flexibility for changes of use
- System width 200–600 mm

Ideally suitable for large volumes of cables

Simple retroinstallation and highest flexibility


Long-life thanks to robust construction

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Trunking unit, blank, height 40–140 mm





Type	Width mm	Length mm	Trunking height mm	Covers pc.	Pack. m	Weight kg/100 m	Item No.
OKA-G20040140	200	2400	40 - 140	3	2.4	848.300	**7424000**
OKA-G30040140	300	2400	40 - 140	3	2.4	1,171.700	**7424002**
OKA-G40040140	400	2400	40 - 140	3	2.4	1,489.220	**7424004**
OKA-G50040140	500	2400	40 - 140	3	2.4	1,846.700	**7424006**
OKA-G60040140	600	2400	40 - 140	3	2.4	2,179.600	**7424008**


St Steel

FS Strip-galvanised

With three blanking lids (L = 800 mm).

Trunking unit, blank, height 40–240 mm





Type	Width mm	Length mm	Trunking height mm	Covers pc.	Pack. m	Weight kg/100 m	Item No.
OKA-G20040240	200	2400	40 - 240	3	2.4	867.080	**7424020**
OKA-G30040240	300	2400	40 - 240	3	2.4	1,190.000	**7424022**
OKA-G40040240	400	2400	40 - 240	3	2.4	1,507.500	**7424024**
OKA-G50040240	500	2400	40 - 240	3	2.4	1,881.250	**7424026**
OKA-G60040240	600	2400	40 - 240	3	2.4	2,214.170	**7424028**


St Steel

FS Strip-galvanised

With three blanking lids (L = 800 mm).

Trunking unit, blank, locking, height 40–140 mm





Type	Width mm	Length mm	Trunking height mm	Covers pc.	Pack. m	Weight kg/100 m	Item No.
OKA-G20040140R	200	2400	40 - 140	3	2.4	836.250	**7424040**
OKA-G30040140R	300	2400	40 - 140	3	2.4	1,158.700	**7424042**
OKA-G40040140R	400	2400	40 - 140	3	2.4	1,484.200	**7424044**
OKA-G50040140R	500	2400	40 - 140	3	2.4	1,850.400	**7424046**
OKA-G60040140R	600	2400	40 - 140	3	2.4	2,183.300	**7424048**


St Steel

FS Strip-galvanised

With three self-locking blanking lids (L = 800 mm).

Trunking unit, blank, locking, height 40–240 mm






Type	Width mm	Length mm	Trunking height mm	Covers pc.	Pack. m	Weight kg/100 m	Item No.
OKA-G20040240R	200	2400	40 - 240	3	2.4	855.800	**7424060**
OKA-G30040240R	300	2400	40 - 240	3	2.4	1,178.300	**7424062**
OKA-G40040240R	400	2400	40 - 240	3	2.4	1,503.800	**7424064**
OKA-G50040240R	500	2400	40 - 240	3	2.4	1,870.000	**7424066**
OKA-G60040240R	600	2400	40 - 240	3	2.4	2,202.900	**7424068**


St Steel

FS Strip-galvanised

With three self-locking blanking lids (L = 800 mm).

Trunking unit for GES4, height 40–140 mm





Type	Width mm	Length mm	Trunking height mm	Covers pc.	Pack. m	Weight kg/100 m	Item No.
OKA-G30040140D4	300	2400	40 - 140	3	2.4	1,127.920	**7424120**
OKA-G40040140D4	400	2400	40 - 140	3	2.4	1,453.300	**7424122**

St Steel

FS Strip-galvanised


With screw-on device installation lids, each with an installation opening for a square installation unit nominal size 4.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Trunking unit for GES4, height 40–240 mm

Type	Width mm	Length mm	Trunking height mm	Covers pc.	Pack. m	Weight kg/100 m	Item No.
OKA-G30040240D4	300	2400	40 - 240	3	2.4	1,147.500	**7424140**
OKA-G40040240D4	400	2400	40 - 240	3	2.4	1,472.900	**7424142**






St Steel


FS Strip-galvanised

With screw-on device installation lids, each with an installation opening for a square installation unit nominal size 4.

Trunking unit for GES6, height 40–140 mm

Type	Width mm	Length mm	Trunking height mm	Covers pc.	Pack. m	Weight kg/100 m	Item No.
OKA-G40040140D6	400	2400	40 - 140	3	2.4	1,465.000	**7424162**






St Steel


FS Strip-galvanised

With screw-on device installation lids, each with an installation opening for an installation unit nominal size 6.

Trunking unit for GES6, height 40–240 mm

Type	Width mm	Length mm	Trunking height mm	Covers pc.	Pack. m	Weight kg/100 m	Item No.
OKA-G40040240D6	400	2400	40 - 240	3	2.4	1,453.750	**7424182**






St Steel


FS Strip-galvanised

With screw-on device installation lids, each with an installation opening for an installation unit nominal size 6.

Trunking unit for GES9, height 40–140 mm

Type	Width mm	Length mm	Trunking height mm	Covers pc.	Pack. m	Weight kg/100 m	Item No.
OKA-G40040140D9	400	2400	40 - 140	3	2.4	1,431.700	**7424200**
OKA-G50040140D9	500	2400	40 - 140	6	2.4	1,662.100	**7424202**
OKA-G60040140D9	600	2400	40 - 140	6	2.4	1,974.600	**7424204**






St Steel


FS Strip-galvanised

With three (for nominal trunking width 400, L = 800 mm) or six device installation lids (for nominal trunking widths 500 and 600, L = 400 mm) each with one installation opening for a square installation unit of nominal size 9.

Trunking unit for GES9, height 40–240 mm

Type	Width mm	Length mm	Trunking height mm	Covers pc.	Pack. m	Weight kg/100 m	Item No.
OKA-G40040240D9	400	2400	40 - 240	3	2.4	1,451.250	**7424220**
OKA-G50040240D9	500	2400	40 - 240	6	2.4	1,681.700	**7424222**
OKA-G60040240D9	600	2400	40 - 240	6	2.4	1,994.200	**7424224**





St Steel

FS Strip-galvanised


With three (for nominal trunking width 400, L = 800 mm) or six device installation lids (for nominal trunking widths 500 and 600, L = 400 mm) each with one installation opening for a square installation unit of nominal size 9.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

OKA-G installation trunking with mesh

Trunking unit for GESR9, height 40–140 mm






Type	Width mm	Length mm	Trunking height mm	Covers pc.	Pack. m	Weight kg/100 m	Item No.
OKA-G40040140DR9	400	2400	40 - 140	3	2.4	1,414.200	**7424240**
OKA-G50040140DR9	500	2400	40 - 140	6	2.4	1,619.600	**7424242**
OKA-G60040140DR9	600	2400	40 - 140	6	2.4	1,932.100	**7424246**


St Steel

FS Strip-galvanised

With three (for nominal trunking width 400, L = 800 mm) or six device installation lids (for nominal trunking widths 500 and 600, L = 400 mm) each with one installation opening for a round installation unit of nominal size R9.

Trunking unit for GESR9, height 40–240 mm





Type	Width mm	Length mm	Trunking height mm	Covers pc.	Pack. m	Weight kg/100 m	Item No.
OKA-G40040240DR9	400	2400	40 - 240	3	2.4	1,433.750	**7424260**
OKA-G50040240DR9	500	2400	40 - 240	6	2.4	1,639.200	**7424262**
OKA-G60040240DR9	600	2400	40 - 240	6	2.4	1,951.700	**7424264**

St Steel


FS Strip-galvanised

With three (for nominal trunking width 400, L = 800 mm) or six device installation lids (for nominal trunking widths 500 and 600, L = 400 mm) each with one installation opening for a round installation unit of nominal size R9.

Extension unit with fabric OKA-G

Barrier strip 60






Type	Dimension H mm	Plate thickness mm	Dimension L mm	Pack. m	Weight kg/100 m	Item No.
TSG 60 FS	60	0.75	3000	3	55.700	**6062068**
TSG 85 FS	85	0.75	3000	3	70.300	**6062114**

St Steel

FS Strip-galvanised

Barrier strip 110






Type	Dimension H mm	Plate thickness mm	Dimension L mm	Pack. m	Weight kg/100 m	Item No.
TSG 110 FS	110	0.75	3000	3	85.000	**6062122**

St Steel

FS Strip-galvanised

Barrier strip 135





Type	Dimension H mm	Plate thickness mm	Dimension L mm	Pack. m	Weight kg/100 m	Item No.
TSG 135 FS	135	0.75	3000	3	100.000	**6062132**

St Steel

FS Strip-galvanised

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Separating retainer connector

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
TSGV A2	10	0.923	**6067970**


V2A Stainless steel, A2



OKA-W installation trunking with floor trough

Trunking unit, blank, height 40–70 mm

Type	Width mm	Length mm	Trunking height mm	Covers pc.	Pack. m	Weight kg/100 m	Item No.
OKA-W2004030	200	2400	40 - 70	3	2.4	966.700	**7424400**
OKA-W3004030	300	2400	40 - 70	3	2.4	1,366.700	**7424402**
OKA-W4004030	400	2400	40 - 70	3	2.4	1,775.000	**7424404**
OKA-W5004030	500	2400	40 - 70	3	2.4	2,225.000	**7424406**
OKA-W6004030	600	2400	40 - 70	3	2.4	2,637.500	**7424408**






St Steel

FS Strip-galvanised

With three blanking lids (L = 800 mm).

Trunking unit, blank, height 60–110 mm

Type	Width mm	Length mm	Trunking height mm	Covers pc.	Pack. m	Weight kg/100 m	Item No.
OKA-W2006050	200	2400	60 - 110	3	2.4	1,004.200	**7424420**
OKA-W3006050	300	2400	60 - 110	3	2.4	1,404.200	**7424422**
OKA-W4006050	400	2400	60 - 110	3	2.4	1,812.500	**7424424**
OKA-W5006050	500	2400	60 - 110	3	2.4	2,262.500	**7424426**
OKA-W6006050	600	2400	60 - 110	3	2.4	2,675.000	**7424428**






St Steel

FS Strip-galvanised

With three blanking lids (L = 800 mm).

Trunking unit, blank, height 100–150 mm

Type	Width mm	Length mm	Trunking height mm	Covers pc.	Pack. m	Weight kg/100 m	Item No.
OKA-W20010050	200	2400	100 - 150	3	2.4	1,070.800	**7424440**
OKA-W30010050	300	2400	100 - 150	3	2.4	1,470.800	**7424442**
OKA-W40010050	400	2400	100 - 150	3	2.4	1,879.200	**7424444**
OKA-W50010050	500	2400	100 - 150	3	2.4	2,329.200	**7424446**
OKA-W60010050	600	2400	100 - 150	3	2.4	2,741.700	**7424458**






St Steel

FS Strip-galvanised

With three blanking lids (L = 800 mm).

Trunking unit, blank, locking, height 40–70 mm

Type	Width mm	Length mm	Trunking height mm	Covers pc.	Pack. m	Weight kg/100 m	Item No.
OKA-W2004030R	200	2400	40 - 70	3	2.4	970.800	**7424460**
OKA-W3004030R	300	2400	40 - 70	3	2.4	1,370.800	**7424462**
OKA-W4004030R	400	2400	40 - 70	3	2.4	1,779.200	**7424464**





St Steel

FS Strip-galvanised


With three self-locking blanking lids (L = 800 mm).

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Trunking unit, blank, locking, height 60–110 mm





Type	Width mm	Length mm	Trunking height mm	Covers pc.	Pack. m	Weight kg/100 m	Item No.
OKA-W2006050R	200	2400	60 - 110	3	2.4	1,008.300	**7424480**
OKA-W3006050R	300	2400	60 - 110	3	2.4	1,408.300	**7424482**
OKA-W4006050R	400	2400	60 - 110	3	2.4	1,816.700	**7424484**
OKA-W5006050R	500	2400	60 - 110	3	2.4	2,266.700	**7424486**
OKA-W6006050R	600	2400	60 - 110	3	2.4	2,679.200	**7424488**


St Steel

FS Strip-galvanised

With three self-locking blanking lids (L = 800 mm).

Trunking unit, blank, locking, height 100–150 mm






Type	Width mm	Length mm	Trunking height mm	Covers pc.	Pack. m	Weight kg/100 m	Item No.
OKA-W20010050R	200	2400	100 - 150	3	2.4	1,075.000	**7424500**
OKA-W30010050R	300	2400	100 - 150	3	2.4	1,475.000	**7424502**
OKA-W40010050R	400	2400	100 - 150	3	2.4	1,883.300	**7424504**
OKA-W50010050R	500	2400	100 - 150	3	2.4	2,333.300	**7424506**
OKA-W60010050R	600	2400	100 - 150	3	2.4	2,745.800	**7424508**


St Steel

FS Strip-galvanised

With three self-locking blanking lids (L = 800 mm).

Trunking unit for GES4, height 60–110 mm






Type	Width mm	Length mm	Trunking height mm	Covers pc.	Pack. m	Weight kg/100 m	Item No.
OKA-W3006050D4	300	2400	60 - 110	3	2.4	1,377.100	**7424600**
OKA-W4006050D4	400	2400	60 - 110	3	2.4	1,785.400	**7424602**


St Steel

FS Strip-galvanised

With screw-on device installation lids, each with an installation opening for an installation unit nominal size 4.

Trunking unit for GES4, height 100–150 mm






Type	Width mm	Length mm	Trunking height mm	Covers pc.	Pack. m	Weight kg/100 m	Item No.
OKA-W30010050D4	300	2400	100 - 150	3	2.4	1,439.600	**7424620**
OKA-W40010050D4	400	2400	100 - 150	3	2.4	1,847.900	**7424622**


St Steel

FS Strip-galvanised

With screw-on device installation lids, each with an installation opening for an installation unit nominal size 4.

Trunking unit for GES6, height 60–110 mm





Type	Width mm	Length mm	Trunking height mm	Covers pc.	Pack. m	Weight kg/100 m	Item No.
OKA-W4006050D6	400	2400	60 - 110	3	2.4	1,785.400	**7424662**

St Steel

FS Strip-galvanised


With screw-on device installation lids, each with an installation opening for an installation unit nominal size 6.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Trunking unit for GES6, height 100–150 mm

Type	Width mm	Length mm	Trunking height mm	Covers pc.	Pack. m	Weight kg/100 m	Item No.
OKA-W40010050D6	400	2400	100 - 150	3	2.4	1,847.900	**7424682**






St Steel


FS Strip-galvanised

With screw-on device installation lids, each with an installation opening for an installation unit nominal size 6.

Trunking unit for GES9, height 60–110 mm

Type	Width mm	Length mm	Trunking height mm	Covers pc.	Pack. m	Weight kg/100 m	Item No.
OKA-W4006050D9	400	2400	60 - 110	3	2.4	1,785.420	**7424720**
OKA-W5006050D9	500	2400	60 - 110	6	2.4	2,168.800	**7424722**
OKA-W6006050D9	600	2400	60 - 110	6	2.4	2,580.000	**7424724**






St Steel


FS Strip-galvanised

With three (for nominal trunking width 400, L = 800 mm) or six device installation lids (for nominal trunking widths 500 and 600, L = 400 mm) each with one installation opening for a square installation unit of nominal size 9 or 9/55.

Trunking unit for GES9, height 100–150 mm

Type	Width mm	Length mm	Trunking height mm	Covers pc.	Pack. m	Weight kg/100 m	Item No.
OKA-W40010050D9	400	2400	100 - 150	3	2.4	1,847.900	**7424740**
OKA-W50010050D9	500	2400	100 - 150	6	2.4	2,234.600	**7424742**
OKA-W60010050D9	600	2400	100 - 150	6	2.4	2,645.400	**7424744**






St Steel


FS Strip-galvanised

With three (for nominal trunking width 400, L = 800 mm) or six device installation lids (for nominal trunking widths 500 and 600, L = 400 mm) each with one installation opening for a square installation unit of nominal size 9 or 9/55.

Trunking unit for GESR9, height 60–110 mm

Type	Width mm	Length mm	Trunking height mm	Covers pc.	Pack. m	Weight kg/100 m	Item No.
OKA-W4006050DR9	400	2400	60 - 110	3	2.4	1,764.600	**7424780**
OKA-W5006050DR9	500	2400	60 - 110	6	2.4	2,126.300	**7424782**
OKA-W6006050DR9	600	2400	60 - 110	6	2.4	2,537.500	**7424784**






St Steel


FS Strip-galvanised

With three (for nominal trunking width 400, L = 800 mm) or six device installation lids (for nominal trunking widths 500 and 600, L = 400 mm) each with one installation opening for a round installation unit of nominal size R9 or R9/55.

Trunking unit for GESR9, height 100–150 mm

Type	Width mm	Length mm	Trunking height mm	Covers pc.	Pack. m	Weight kg/100 m	Item No.
OKA-W40010050DR9	400	2400	100 - 150	3	2.4	1,827.100	**7424800**
OKA-W50010050DR9	500	2400	100 - 150	6	2.4	2,192.100	**7424802**
OKA-W60010050DR9	600	2400	100 - 150	6	2.4	2,602.900	**7424804**





St Steel

FS Strip-galvanised


With three (for nominal trunking width 400, L = 800 mm) or six device installation lids (for nominal trunking widths 500 and 600, L = 400 mm) each with one installation opening for a round installation unit of nominal size R9 or R9/55.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Expansion unit with floor trough OKA-W

Extension unit for GES4, height 60–110 mm






Type	Dimension A mm	Dimension a mm	Trunking height mm	Nominal size	Pack. pcs	Weight kg/100 pcs.	Item No.
OKA-W A 6050 4	400	201	60 - 110	4	1	947.000	**7424900**


St Steel

FS Strip-galvanised

Size of the mounting unit suitable for the installation of a square installation unit of nominal size 4.

Extension unit for GES4, height 100–150 mm






Type	Dimension A mm	Dimension a mm	Trunking height mm	Nominal size	Pack. pcs	Weight kg/100 pcs.	Item No.
OKA-W A 10050 4	400	201	100 - 150	4	1	976.000	**7424920**


St Steel

FS Strip-galvanised

Size of the mounting unit suitable for the installation of a square installation unit of nominal size 4.

Extension unit for GES6, height 60–110 mm






Type	Dimension A mm	Dimension a mm	Dimension b mm	Trunking height mm	Nominal size	Pack. pcs	Weight kg/100 pcs.	Item No.
OKA-W A 6050 6	400	201	253	60 - 110	6	1	922.000	**7424902**


St Steel

FS Strip-galvanised

Size of the mounting unit suitable for the installation of a rectangular installation unit of nominal size 6.

Extension unit for GES6, height 100–150 mm






Type	Dimension A mm	Dimension a mm	Dimension b mm	Trunking height mm	Nominal size	Pack. pcs	Weight kg/100 pcs.	Item No.
OKA-W A 10050 6	400	201	253	100 - 150	6	1	951.000	**7424922**


St Steel

FS Strip-galvanised

Size of the mounting unit suitable for the installation of a rectangular installation unit of nominal size 6.

Extension unit for GES9, height 40–70 mm





Type	Dimension A mm	Dimension a mm	Trunking height mm	Nominal size	Pack. pcs	Weight kg/100 pcs.	Item No.
OKA-W A 4030 9	400	244	40 - 70	9	1	868.000	**7424884**

St Steel

FS Strip-galvanised

Size of the mounting unit suitable for the installation of a square installation unit of nominal size 9/55.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.


Extension unit for GES9, height 60–110 mm


Type	Dimension A mm	Dimension a mm	Trunking height mm	Nominal size	Pack. pcs	Weight kg/100 pcs.	Item No.
OKA-W A 6050 9	400	244	60 - 110	9	1	882.000	**7424904**

St Steel

FS Strip-galvanised

Size of the mounting unit suitable for the installation of a square installation unit of nominal size 9 or 9/55.






Extension unit for GES9, height 100–150 mm


Type	Dimension A mm	Dimension a mm	Trunking height mm	Nominal size	Pack. pcs	Weight kg/100 pcs.	Item No.
OKA-W A 10050 9	400	244	100 - 150	9	1	1,010.000	**7424924**

St Steel

FS Strip-galvanised

Size of the mounting unit suitable for the installation of a square installation unit of nominal size 9 or 9/55.






Extension unit for GESR9, height 40–70 mm


Type	Dimension A mm	Dimension d Ø mm	Trunking height mm	Nominal size	Pack. pcs	Weight kg/100 pcs.	Item No.
OKA-W A 4030R9	400	305	40 - 70	R9	1	868.000	**7424886**

St Steel

FS Strip-galvanised

Size of the mounting unit suitable for the installation of a round installation unit of nominal size R9/55.






Extension unit for GESR9, height 60–110 mm


Type	Dimension A mm	Dimension d Ø mm	Trunking height mm	Nominal size	Pack. pcs	Weight kg/100 pcs.	Item No.
OKA-W A 6050R9	400	305	60 - 110	R9	1	882.000	**7424906**

St Steel

FS Strip-galvanised

Size of the mounting unit suitable for the installation of a round installation unit of nominal size R9 or R9/55.






Extension unit for GESR9, height 100–150 mm


Type	Dimension A mm	Dimension d Ø mm	Trunking height mm	Nominal size	Pack. pcs	Weight kg/100 pcs.	Item No.
OKA-W A 10050R9	400	305	100 - 150	R9	1	911.000	**7424926**

St Steel

FS Strip-galvanised

Size of the mounting unit suitable for the installation of a round installation unit of nominal size R9 or R9/55.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Accessories for OKA-W

Separating retainer





Type	Length mm	Height mm	Trunking height mm	Pack. m	Weight kg/100 m	Item No.
OKA2 TW 30	2400	16.5	30	2.4	23.300	**7401984**
OKA2 TW 40	2400	26.5	40	2.4	31.300	**7401988**
OKA2 TW 50	2400	36.5	50	2.4	39.200	**7401992**
OKA2 TW 60	2400	46.5	60	2.4	46.700	**7401996**
OKA2 TW 70	2400	56.5	70	2.4	54.600	**7402000**
OKA2 TW 80	2400	66.5	80	2.4	62.500	**7402004**
OKA2 TW 90	2400	76.5	90	2.4	70.000	**7402008**
OKA2 TW 100	2400	86.5	100	2.4	77.900	**7401960**
OKA2 TW 120	2400	106.5	120	2.4	93.800	**7401968**
OKA2 TW 140	2400	126.5	140	2.4	109.200	**7401976**
OKA2 TW 150	2400	136.5	150	2.4	117.100	**7401980**

St Steel


FS Strip-galvanised

Divider for use in the floor trough of the previously prepared OKA-W trunking unit.

Accessories for OKA-G and OKA-W

Trunking end piece, height 40–150 mm





Type	Width mm	Trunking height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
OKA-G20040150ES	200	40 - 150	1	33.000	**7424280**
OKA-G30040150ES	300	40 - 150	1	45.000	**7424282**
OKA-G40040150ES	400	40 - 150	1	57.000	**7424284**
OKA-G50040150ES	500	40 - 150	1	78.000	**7424286**
OKA-G60040150ES	600	40 - 150	1	91.000	**7424288**


St Steel

FS Strip-galvanised

Ready-to-mount trunking end cap, consisting of a flexible apron with side and floor covering guide profiles. The scope of delivery contains trunking connection brackets and a height-adjustable fixing bracket.

Trunking end piece, height 40–240 mm





Type	Width mm	Trunking height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
OKA-G20040240ES	200	40 - 240	1	34.000	**7424300**
OKA-G30040240ES	300	40 - 240	1	47.000	**7424302**
OKA-G40040240ES	400	40 - 240	1	59.000	**7424304**
OKA-G50040240ES	500	40 - 240	1	81.000	**7424306**
OKA-G60040240ES	600	40 - 240	1	94.000	**7424308**

St Steel

FS Strip-galvanised

Ready-to-mount trunking end cap, consisting of a flexible apron with side and floor covering guide profiles. The scope of delivery contains trunking connection brackets and a height-adjustable fixing bracket.

Construction set for trunking T branch and intersection



Type	Pack. pcs	Weight kg/100 pcs.	Item No.
OKA FB2 TX	1	24.800	**7424821**

Zn Die-cast zinc


For construction-side creation of a trunking junction as a T piece or intersection. With all the parts necessary for mounting. Suitable for the OKA-G and OKA-W trunking systems.
2 construction sets are required to create an intersection.


Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Construction set for 90° angle to right, height 40–150 mm

Type	Width mm	Pack. pcs	Weight kg/100 pcs.	Item No.
OKA-G20040150FBR	200	1	49.800	**7423970**
OKA-G30040150FBR	300	1	62.800	**7423972**
OKA-G40040150FBR	400	1	74.800	**7423974**
OKA-G50040150FBR	500	1	96.800	**7423976**
OKA-G60040150FBR	600	1	109.800	**7423978**






St Steel

FS Strip-galvanised

For construction-side creation of a trunking junction as a 90° angle to the right. With all the parts necessary for mounting. Suitable for the OKA-G and OKA-W trunking systems.

Construction set for 90° angle to right, height 40–240 mm

Type	Width mm	Pack. pcs	Weight kg/100 pcs.	Item No.
OKA-G20040240FBR	200	1	57.700	**7423980**
OKA-G30040240FBR	300	1	69.700	**7423982**
OKA-G40040240FBR	400	1	81.700	**7423984**
OKA-G50040240FBR	500	1	102.700	**7423986**
OKA-G60040240FBR	600	1	115.700	**7423988**






St Steel


FS Strip-galvanised

For construction-side creation of a trunking junction as a 90° angle to the right. With all the parts necessary for mounting. Suitable for the OKA-G and OKA-W trunking systems.

Construction set for 90° angle to left, height 40–150 mm

Type	Width mm	Pack. pcs	Weight kg/100 pcs.	Item No.
OKA-G20040150FBL	200	1	49.600	**7423950**
OKA-G30040150FBL	300	1	62.800	**7423952**
OKA-G40040150FBL	400	1	74.800	**7423954**
OKA-G50040150FBL	500	1	96.800	**7423956**
OKA-G60040150FBL	600	1	109.800	**7423958**






St Steel

FS Strip-galvanised

For construction-side creation of a trunking junction as a 90° angle to the left. With all the parts necessary for mounting. Suitable for the OKA-G and OKA-W trunking systems.

Construction set for 90° angle to left, height 40–240 mm

Type	Width mm	Pack. pcs	Weight kg/100 pcs.	Item No.
OKA-G20040240FBL	200	1	57.700	**7423960**
OKA-G30040240FBL	300	1	69.700	**7423962**
OKA-G40040240FBL	400	1	81.700	**7423964**
OKA-G50040240FBL	500	1	102.700	**7423966**
OKA-G60040240FBL	600	1	115.700	**7423968**






St Steel

FS Strip-galvanised

For construction-side creation of a trunking junction as a 90° angle to the left. With all the parts necessary for mounting. Suitable for the OKA-G and OKA-W trunking systems.

Height adjustment unit

Type	Dimension h mm	Trunking height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
OKA NEVE 110	110	40 - 110	6	14.200	**7425970**
OKA NEVE 150	150	40 - 150	6	15.300	**7425972**
OKA NEVE 250	250	40 - 250	6	18.000	**7425974**





St Steel


Complete levelling unit with express height adjustment for connecting, fastening and adjusting the height of trunking units of the OKA-G and OKA-W systems. For additional requirements.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Floor covering contact profile






Type	Length mm	Width mm	Pack. m	Weight kg/100 m	Item No.
OKA BA4 3	2400	4	48	10.300	**7404220**

Alu Aluminium

Floor guide profile for the OKA-G and OKA-W trunking systems. Insertable in the side profile flush with floor or at a height of 3 mm above the floor. Spare part.

Mounting lid, blank, 800 mm






Type	Width mm	Dimension A mm	Pack. pcs	Weight kg/100 pcs.	Item No.
OKA D 200	200	177	1	442.000	**7401870**
OKA D 300	300	277	1	692.000	**7401997**
OKA D 400	400	377	1	942.000	**7401898**


St Steel

FS Strip-galvanised

For blank closing of a trunking unit. Lid fixing screws contained in scope of delivery.

Mounting lid for Telitank top, 800 mm






Type	Width mm	Dimension A mm	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
OKA DAT 200	200	177	100	1	436.000	**7401904**
OKA DAT 300	300	277	100	1	686.000	**7401912**
OKA DAT 400	400	377	100	1	936.000	**7401920**


St Steel

FS Strip-galvanised

With mounting opening for the setup of a Telitank. Mounting opening closed with blanking plate lid. Lid fixing screws contained in scope of delivery.

Mounting lid for GES4, 800 mm






Type	Width mm	Dimension A mm	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
OKA DG4 300	300	277	201	1	669.000	**7402040**
OKA DG4 400	400	377	201	1	919.000	**7402048**


St Steel

FS Strip-galvanised

With mounting opening for the installation of an installation unit of nominal size 4. Mounting opening closed with blanking lid plate. Lid fixing screws contained in scope of delivery.

Mounting lid for GES6, 800 mm





Type	Width mm	Dimension A mm	Dimension a mm	Dimension b mm	Pack. pcs	Weight kg/100 pcs.	Item No.
OKA DG6 400	400	377	201	253	1	905.000	**7402056**

St Steel

FS Strip-galvanised

With mounting opening for the installation of an installation unit of nominal size 6. Mounting opening closed with blanking lid plate. Lid fixing screws contained in scope of delivery.

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


Mounting lid for GES9, 800 mm


Type	Width mm	Dimension A mm	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
OKA DG9 400	400	377	244	1	903.000	**7402064**

St Steel

FS Strip-galvanised

With mounting opening for the installation of an installation unit of nominal size 9. Mounting opening closed with blanking lid plate. Lid fixing screws contained in scope of delivery.






Mounting lid for GESR9, 800 mm


Type	Width mm	Dimension A mm	Dimension d Ø mm	Pack. pcs	Weight kg/100 pcs.	Item No.
OKA DGR9 400	400	377	305	1	888.000	**7402068**

St Steel

FS Strip-galvanised

With mounting opening for the installation of an installation unit of nominal size R9. Mounting opening closed with blanking lid plate. Lid fixing screws contained in scope of delivery.





Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.



OKA-T open trunking system, screed-flush

The open, screed-flush OKA-T trunking system is used for cable routing and the installation of electrical resources in the underfloor area. The trunking system is closed on all sides. It can be opened along the entire length.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbeseiten / ebd 2019/04/18 11:21:04 11:21:04 (LLExport_02579) 04/18


ZES9 inspection cover

Type	Colour	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ZES9-2 U10T 7011	Iron grey	10	1	206.300	**7406672**

PA Polyamide

Junction box insert for blank closing of a square mounting opening of nominal size 9 in an underfloor duct or trunking system or in raised floor. Polyamide floor covering profile.
Recess is 5 mm, if necessary, adjustable to 3, 8 or 10 mm.





Installation accessories for device installation units of nominal size 4, R4, 6, R7

Locking element

Type	Screed height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RE 6	—	6	18.000	**7400692**



Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.



OKB brush bar trunking system

There are almost no signs of how this room is supplied with power. Only a slender, discreet brush bar along the wall offers an indication. It is there that the open, screed-flush OBK brush bar trunking system from Ackermann made by OBO runs. The special feature: The trunking has an opening towards the wall along its entire length. A brush bar covers this opening and serves as visually attractive sight and dust protection. The cables can be run out of the trunking at any location.






Always indicate the item number when ordering.
Gesamtkatalog_K1_LFS_EOS_UFS_2019_Belgien_Werbseiten_en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

OKB brush bar trunking system

ACKERMANN
MADE BY OBO

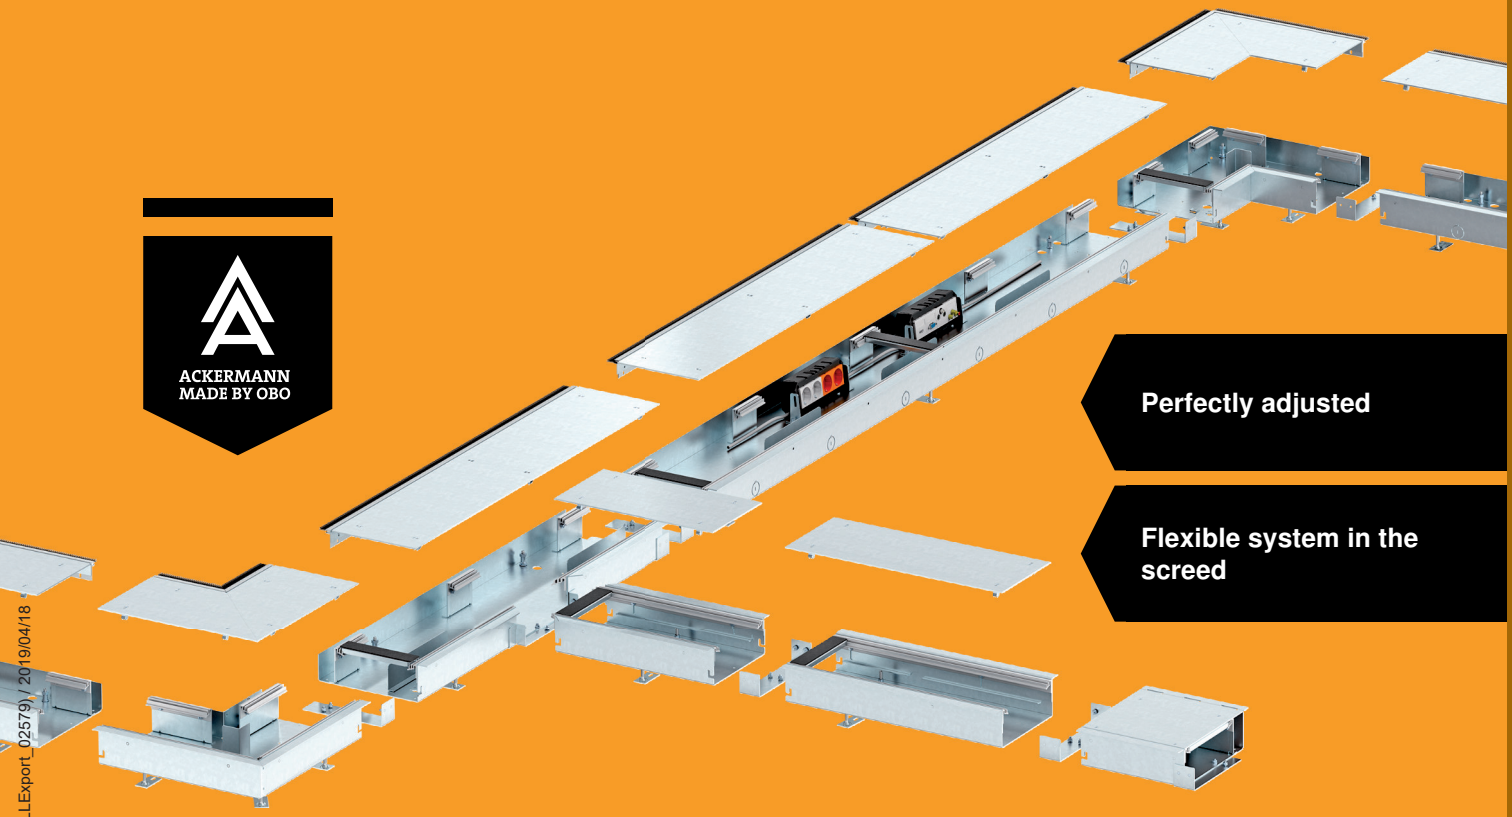

Perfectly adjusted

Flexible system in the screed







Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Trunking unit with brush bar, without height adjustment units






Type	Width mm	Length mm	Dimension h mm	Pack. m	Weight kg/100 m	Item No.
OKB U 25085 BLON	250	2000	85	2	1,425.000	**7403816**


St Steel

FS Strip-galvanised

Ready-to-mount trunking unit for cable routing and device installation, consisting of a trunking base with two lids and height-adjustable brush bar and one floor covering contact profile. The scope of delivery contains two lid butt seals and a connector.
For height adjustment six levelling units are required.

Trunking unit with blanking lid, without height adjustment units






Type	Width mm	Length mm	Dimension h mm	Pack. m	Weight kg/100 m	Item No.
OKB U 25085 BD	250	2000	85	2	1,448.500	**7403818**


St Steel

FS Strip-galvanised

Ready-to-mount trunking unit for cable routing and device installation, consisting of a trunking base with two blind lids and one floor covering contact profile. The scope of delivery contains two lid butt seals and a connector.
For height adjustment six levelling units are required.

Trunking end piece






Type	Width mm	Trunking height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
OKB ES 25085	250	85 - 125	1	52.850	**7403820**


St Steel

FS Strip-galvanised

Ready-to-mount duct end connection, consisting of a side wall and a height-adjustable side profile for universal installation on left or right.

Internal corner, without height adjustment unit






Type	Width mm	Length mm	Dimension h mm	Pack. pcs	Weight kg/100 pcs.	Item No.
OKB IE 25085 ON	250	421	85	1	850.000	**7403826**


St Steel

FS Strip-galvanised

Ready-to-mount internal corner, consisting of a trunking base, two lids, height-adjustable side profiles and brush bar arranged on the wall side for cable alignment. The scope of delivery contains one lid butt seal and a connector.
For height adjustment five levelling units are required.

External corner, without height adjustment unit





Type	Width mm	Length mm	Dimension h mm	Pack. pcs	Weight kg/100 pcs.	Item No.
OKB AE 25085 ON	250	422	85	1	858.000	**7403831**

St Steel

FS Strip-galvanised


Ready-to-mount external corner, consisting of a trunking base, two lids, height-adjustable side profiles and brush bar arranged on the wall side for cable alignment. The scope of delivery contains one lid butt seal and a connector.
For height adjustment five levelling units are required.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Height adjustment unit RKNEV2

Type	Dimension h mm	Pack. PU	Weight kg/100 PUs	Item No.
RK NEV2 70	70	1	20.000	**7405814**
RK NEV2 110	110	1	25.200	**7405815**
RK NEV2 150	150	1	30.000	**7405816**
RK NEV2 190	190	1	35.000	**7405817**
RK NEV2 230	230	1	40.000	**7405818**
RK NEV2 270	270	1	45.800	**7405819**





St Steel

G Electrogalvanised


For flush-floor height adjustment of the height adjustable cassette units and the OKB screed-flush trunking system. The VPE consists of 4 height adjustment units.

Dimensions

Dimension "h" mm	RKN2, 20 mm mm	RKN2, 25 mm mm	RK(S+F)N2, 20 mm mm	RK(S+F)N2, 25 mm mm	RKR2, 20/25 mm mm	RK(S+F)R2, 20/25 mm mm	OKB mm
70	100 - 150	105 - 155	105 - 150	110 - 155	105 - 155	110 - 155	93 - 133
110	140 - 190	145 - 195	145 - 190	150 - 195	145 - 195	150 - 195	133 - 173
150	180 - 230	185 - 235	185 - 230	190 - 235	185 - 235	190 - 235	173 - 213
190	220 - 270	225 - 275	225 - 270	230 - 275	225 - 275	230 - 275	213 - 253
230	260 - 310	265 - 315	265 - 310	270 - 315	265 - 315	270 - 315	253 - 293
270	300 - 350	305 - 355	305 - 350	310 - 355	305 - 355	310 - 355	293 - 333

Device support

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
OKB IT	1	5.700	**7403850**






St Steel

FS Strip-galvanised

System fastening for universal supports in the trunking base.

Universal support UT4, system length 208 mm

Type	Length mm	Width mm	Height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UT4 45 4	208	76	40	1	13.500	**7408727**







PA Polyamide

Universal support with two strain reliefs, partition and UT 4 P4 cover plate for installation of 4 Modul 45 devices in OKB IT device supports.

Connector for trunking unit with brush bar

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
OKB V 250	1	20.240	**7403855**





St Steel

FS Strip-galvanised

Connection element for trunking units and fittings.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.


System 55 for thin screed layers

Low floor structure heights require special solutions for underfloor installations. System 55 is used for screed heights of 55 mm plus floor covering or higher. It is ideal for supplying large areas, particularly in offices and administrative buildings. The duct and trunking systems can be adapted to meet the specific requirements of the construction project and comprise screed-covered and screed-flush solution variants.

The System 55 service outlets have a fixed construction height of 55 mm. This allows simple installation of sockets, data and multimedia connections from the Modul 45 series from OBO Bettermann.

OBO BETTERMANN

ACKERMANN MADE BY OBO

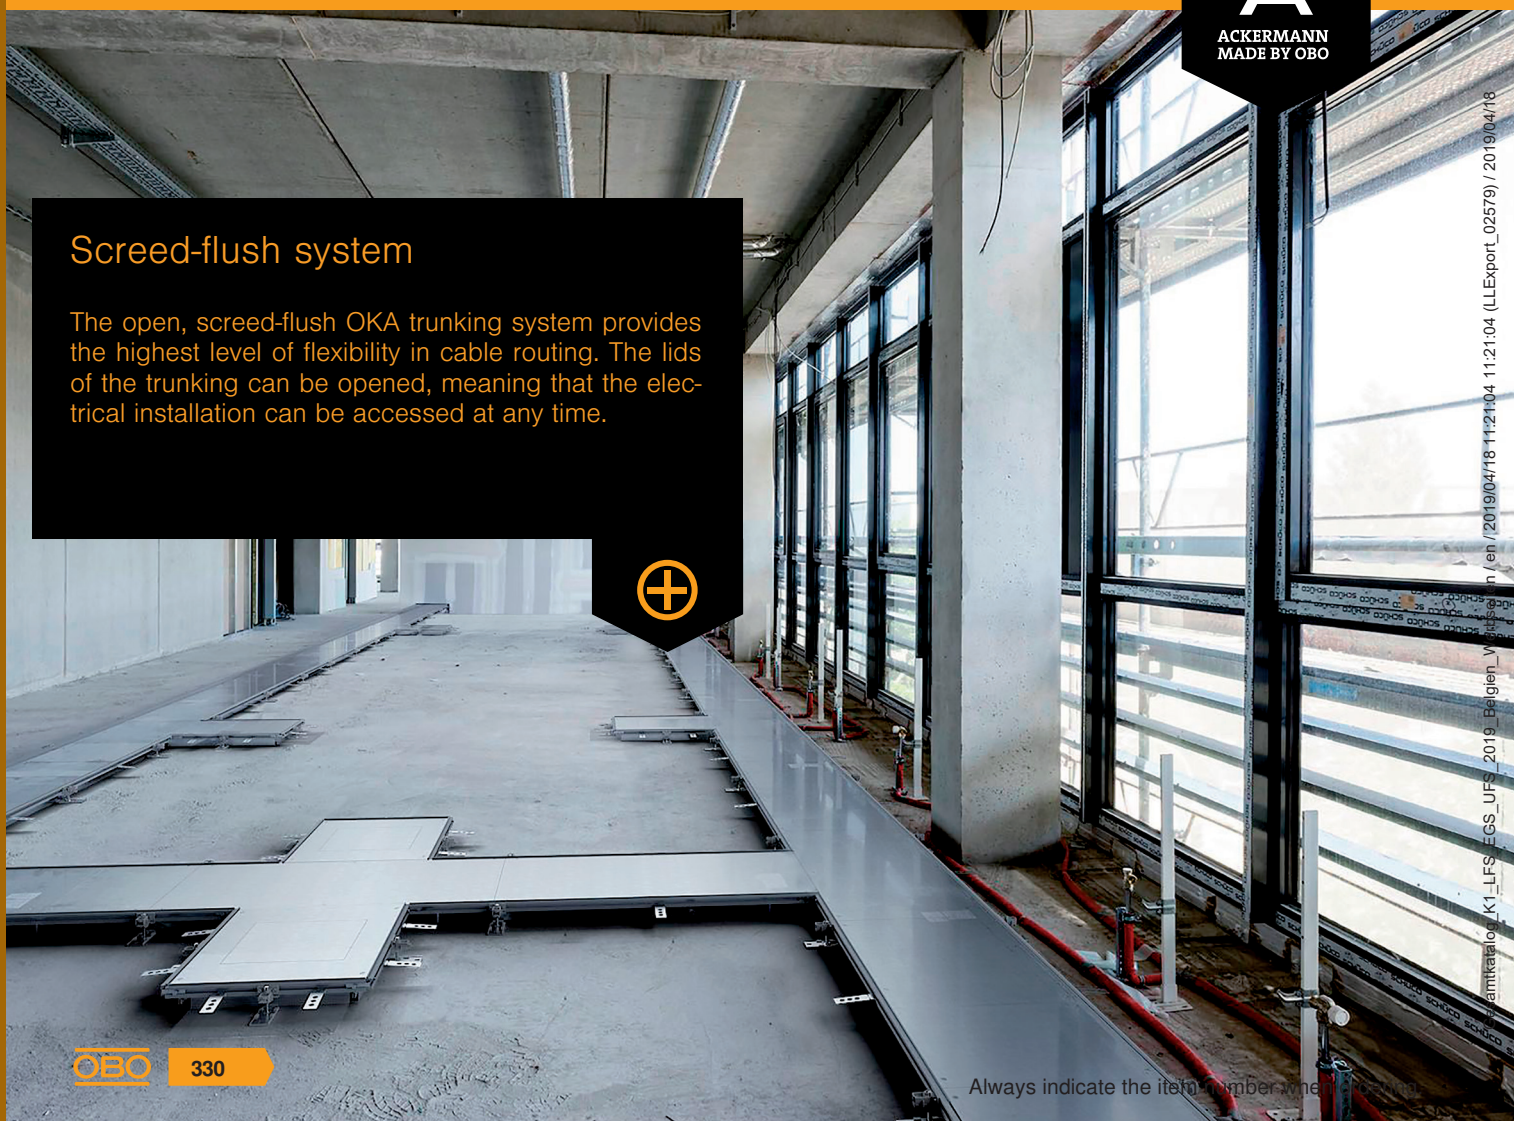

Screed-flush system

The open, screed-flush OKA trunking system provides the highest level of flexibility in cable routing. The lids of the trunking can be opened, meaning that the electrical installation can be accessed at any time.

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Niederlande_en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18



System 55 for thin screed layers

Low floor structure heights require special solutions for underfloor installations. System 55 is used for screed heights of 55 mm plus floor covering or higher. It is ideal for supplying large areas, particularly in offices and administrative buildings. The duct and trunking systems can be adapted to meet the specific requirements of the construction project and comprise screed-covered and screed-flush solution variants.

The System 55 service outlets have a fixed construction height of 55 mm. This allows simple installation of sockets, data and multimedia connections from the Modul 45 series from OBO Bettermann.

Screed-flush system
The open, screed-flush OKA trunking system provides the highest level of flexibility in cable routing. The lids of the trunking can be opened, meaning that the electrical installation can be accessed at any time.



Screed-covered system
The closed, screed-covered EÜK underfloor system allows invisible cable routing, hidden in the screed, via installation pipes.




Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

OKA-G installation trunking with mesh

Trunking unit, blank, height 40–140 mm





Type	Width mm	Length mm	Trunking height mm	Covers pc.	Pack. m	Weight kg/100 m	Item No.
OKA-G20040140	200	2400	40 - 140	3	2.4	848.300	**7424000**
OKA-G30040140	300	2400	40 - 140	3	2.4	1,171.700	**7424002**
OKA-G40040140	400	2400	40 - 140	3	2.4	1,489.220	**7424004**
OKA-G50040140	500	2400	40 - 140	3	2.4	1,846.700	**7424006**
OKA-G60040140	600	2400	40 - 140	3	2.4	2,179.600	**7424008**

St Steel


FS Strip-galvanised

Ready-to-mount duct unit for cable routing consisting of 3 blanking lids, two side profiles with attached flexible side wall made of metal mesh, floor covering contact profiles with H = 3 mm. The scope of supply contains 6 height-adjustable wall fastening brackets, 6 screed anchors and 3 lid butt supports for nominal duct widths 200 and 300 or 3 lid butt seals for nominal duct widths of 400 or 6 lid butt supports for duct widths of 500 and 600. The essential levelling units (observe height adjustment) for the 400, 500 and 600 lid supports are not contained in the scope of delivery and should be ordered separately. On delivery, the duct lids are screwed on.

Accessories for OKA-G

Trunking end piece, height 40–150 mm





Type	Width mm	Trunking height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
OKA-G20040150ES	200	40 - 150	1	33.000	**7424280**
OKA-G30040150ES	300	40 - 150	1	45.000	**7424282**
OKA-G40040150ES	400	40 - 150	1	57.000	**7424284**
OKA-G50040150ES	500	40 - 150	1	78.000	**7424286**
OKA-G60040150ES	600	40 - 150	1	91.000	**7424288**


St Steel


FS Strip-galvanised

Ready-to-mount trunking end cap, consisting of a flexible apron with side and floor covering guide profiles. The scope of delivery contains trunking connection brackets and a height-adjustable fixing bracket.

OKA-W installation trunking with floor trough

Trunking unit, blank, height 40–70 mm





Type	Width mm	Length mm	Trunking height mm	Covers pc.	Pack. m	Weight kg/100 m	Item No.
OKA-W2004030	200	2400	40 - 70	3	2.4	966.700	**7424400**
OKA-W3004030	300	2400	40 - 70	3	2.4	1,366.700	**7424402**
OKA-W4004030	400	2400	40 - 70	3	2.4	1,775.000	**7424404**
OKA-W5004030	500	2400	40 - 70	3	2.4	2,225.000	**7424406**
OKA-W6004030	600	2400	40 - 70	3	2.4	2,637.500	**7424408**

St Steel

FS Strip-galvanised

Ready-to-mount trunking unit with three blanking lids for cable laying, consisting of the trunking base (floor trough with side and floor covering contact profiles) and trunking lid. Floor trough with holding straps for self-contacting mounting of separating retainers. The scope of delivery contains 6 height-adjustable fixing brackets, 6 screed anchors and lid butt seals (3x for nominal trunking widths of 200 and 300) or height-adjustable lid butt supports: 3x for nominal trunking width 400 and 6x for nominal trunking widths 500 and 600. Trunking lid screwed on for delivery.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.


Extension unit for GES9, height 40–70 mm

Type	Dimension A mm	Dimension a mm	Trunking height mm	Nominal size	Pack. pcs	Weight kg/100 pcs.	Item No.
OKA-W A 4030 9	400	244	40 - 70	9	1	868.000	**7424884**

St Steel

FS Strip-galvanised





Ready-to-mount trunking extension unit with a device installation lid for the installation of a flush-mount unit of nominal size 9, consisting of the trunking base (floor trough with side and floor covering contact profiles), trunking lid with blank mounting opening and a flushfloor end cover. The scope of delivery contains 3 height-adjustable fixing brackets, 3 screed anchors, 1 lid butt support and 1 construction set for 90° angle.


Size of the mounting unit suitable for the installation of a square installation unit of nominal size 9/55.


Extension unit for GESR9, height 40–70 mm

Type	Dimension A mm	Dimension d Ø mm	Trunking height mm	Nominal size	Pack. pcs	Weight kg/100 pcs.	Item No.
OKA-W A 4030R9	400	305	40 - 70	R9	1	868.000	**7424886**

St Steel

FS Strip-galvanised





Ready-to-mount trunking extension unit with a device installation lid for the installation of a flush-mount unit of nominal size R9, consisting of the trunking base (floor trough with side and floor covering contact profiles), trunking lid with blank mounting opening and a flushfloor end cover. The scope of delivery contains 3 height-adjustable fixing brackets, 3 screed anchors, 1 lid butt support and 1 construction set for 90° angle.

Size of the mounting unit suitable for the installation of a round installation unit of nominal size R9/55.


Accessories for OKA-W

Trunking end piece, height 40–150 mm

Type	Width mm	Trunking height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
OKA-G20040150ES	200	40 - 150	1	33.000	**7424280**
OKA-G30040150ES	300	40 - 150	1	45.000	**7424282**
OKA-G40040150ES	400	40 - 150	1	57.000	**7424284**
OKA-G50040150ES	500	40 - 150	1	78.000	**7424286**
OKA-G60040150ES	600	40 - 150	1	91.000	**7424288**

St Steel

FS Strip-galvanised





Ready-to-mount trunking end cap, consisting of a flexible apron with side and floor covering guide profiles. The scope of delivery contains trunking connection brackets and a height-adjustable fixing bracket.


Underfloor device socket


Underfloor box UGD250-3 for GES9/55

Type	Dimension A mm	Dimension B mm	Dimension a mm	Dimension b mm	Dimension h mm	Screed height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UGD55 250-3 9R	367	367	244	283	55	55 - 80	1	430.000	**7410060**

St Steel

FS Strip-galvanised







Underfloor mounting box with blanking lid and lid blanking plate for the installation of a square service outlet GES9/55 in screed heights of 55 mm or more. With pipe insertion openings per side: 7 x M20, 3 x M25, 4 x M32. Usable pipe size for system height 55 mm: M20.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Underfloor box UGD350-3 for GES9/55






Type	Dimension A mm	Dimension B mm	Dimension a mm	Dimension b mm	Dimension h mm	Screed height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UGD55 350-3 9R	467	467	244	244	55	55 - 80	1	790.000	**7410062**


St Steel

FS Strip-galvanised

Underfloor mounting box with blanking lid and lid blanking plate for the installation of a square service outlet GES9/55 in screed heights of 55 mm or more. With pipe insertion openings per side: 10 x M20, 3 x M25, 7 x M32. Usable pipe size for system height 55 mm: M20.

Underfloor box UGD350-3 for GESR9/55





Type	Dimension A mm	Dimension B mm	Dimension d Ø mm	Screed height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UGD55 350-3R9R	467	467	305	55 - 80	1	775.000	**7410064**


St Steel


FS Strip-galvanised

Underfloor mounting box with blanking lid and lid blanking plate for the installation of a round service outlet GESR9/55 in screed heights of 55 mm or more. With pipe insertion openings per side: 10 x M20, 3 x M25, 7 x M32. Usable pipe size for system height 55 mm: M20.

Service unit

Service outlet, square, for screed height 55 mm






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GES9 55U V 7011	Iron grey	1	206.700	**7405037**
GES9 55U V 9011	Graphite black	1	206.700	**7405039**

PA Polyamide

GES9 service outlet with a fixed construction height of 55 mm. With two fitted plug housings for vertical mounting of Modul 45 devices and four strain reliefs. Two installation frames are required to mount Modul 45 devices.
The data modules are mounted using a maximum of two optional mounting plates MPMT45.
The service outlet is equipped with universal fastening brackets.

Service outlet, round, for screed height 55 mm






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GESR9 55U V 7011	Iron grey	1	255.000	**7405047**
GESR9 55U V 9011	Graphite black	1	255.000	**7405049**

PA Polyamide

GESR9 service outlet with a fixed construction height of 55 mm. With two fitted plug housings for vertical mounting of Modul 45 devices and four strain reliefs. Two installation frames are required to mount Modul 45 devices.
The data modules are mounted using an optional mounting plate MPMT45. The service outlet is equipped with universal fastening brackets.

Installation frame for four single Modul 45® devices





Type	Material symbol	Pack. pcs	Weight kg/100 pcs.	Item No.
MT45V 4	PC/ABS	5	1.200	**7408670**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

For the installation of 4 individual Modul 45 devices for System 55 service outlet with mounting support for vertical installation of Modul 45 devices.
The installation frame is designed for use with 0° sockets (normal installation position, contact openings on right and left) and their use in conjunction with straight connectors (not angled connectors).

Always indicate the item number when ordering.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Installation frame for combination of 2x and 2x Modul 45® devices

Type	Material symbol	Pack. pcs	Weight kg/100 pcs.	Item No.
MT45V 2+2	PC/ABS	5	0.900	**7408682**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

For the installation of a combination of 2x and 2x Modul 45 socket for System 55 service outlet with mounting support for vertical installation of Modul 45 devices.
The installation frame is designed for use with 0° sockets for straight connectors (not angled connectors).







Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.



On-floor trunking system AIK and Telitank

The AIK on-floor trunking system is installed on the finished floor. The system is particularly useful in places where classic underfloor systems cannot be installed: During building renovation, particularly in listed buildings. Device installation units above the floor (Telitanks) are used for the installation of electrical devices.

OBO BETTERMANN

ACKERMANN MADE BY OBO



Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_LFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Telitank

Device installation units above the floor (Telitanks) are used for the installation of electrical devices. According to DIN EN 50085-2-2, Telitanks can be used in rooms with dry or wet-cleaned floors.

ACKERMANN MADE BY OBO

- Suitable for dry and wet-cleaned floors
- Can be used at low screed heights




- Installation option for four to twelve Modul 45 devices
- With screed-flush trunking system: Screed heights < 70 mm possible

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Cover plate, Telitank T4B, blank







Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
T4B P01S 9011	Graphite black	1	1.070	**7408220**

PVC Polyvinylchloride

Cover plate "blank", suitable for lengthwise side of T4B (1/2 cover)

Cover plate, Telitank T4B, blank






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
T4B P0S2 9011	Graphite black	1	2.160	**7408228**

PVC Polyvinylchloride

Cover plate "blank", suitable for lengthwise side of T4B (1/1 cover)

Cover plate, Telitank T4B, round installation opening for EK device






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
T4B P1S 9011	Graphite black	1	0.570	**7408236**

PVC Polyvinylchloride

Cover plate with 1 perforation (Ø 45 mm) for one accessory with support clamp (EK version), suitable for T4B lengthwise side (1/2 cover).

Cover plate, Telitank T4B, Modul 45 installation opening






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
T4B P6 9011	Graphite black	1	0.910	**7408268**

PA Polyamide

Cover plate with rectangular opening for a single Modul 45 socket, suitable for lengthwise side of T4B (1/2 cover).

Cover plate, Telitank T4B, Modul 45 installation opening






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
T4B P7 9011	Graphite black	1	1.670	**7408276**

PA Polyamide

Cover plate with rectangular opening for a double Modul 45 socket, suitable for T4B lengthwise side (1/1 cover).

Partition Telitank T4B





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
T4B TQ	Graphite black	1	0.280	**7408280**

PVC Polyvinylchloride

Transverse divider for additional interior division.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.

Cover plate, Telitank T4B, installation opening for CEE device with 60 mm fastening track

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
T4B P5S 9011	Graphite black	1	1.150	**7408260**

PVC Polyvinylchloride

Cover plate with 1 perforation (Ø 70 mm) and 60 x 60 mm screw fastening for CEE sockets, suitable for T4B lengthwise side (1/1 cover).






Insertion nut

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
T EM	4	4.600	**7408084**

Zn Die-cast zinc

The insertion nut is suitable for fastening a Telitank on the DAT system opening of the EÜK duct, OKA.. trunking, EBK duct or AIK trunking systems. Packing unit: 4 units.






Cover plate, Telitank T4L/T8NL, blank

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
T8NL P01 9011	Graphite black	1	1.716	**7408436**
T8NL P01 7035	Light grey	1	1.732	**7408440**

PA Polyamide

Cover plate "blank", suitable for narrow side of T4L and T8NL or for T4L and T8NL lengthwise side (1/2 cover).






Cover plate, Telitank T4L/T8NL, round installation opening for EKR device, for narrow side

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
T8NL P1 9011	Graphite black	1	1.230	**7408444**
T8NL P1 7035	Light grey	1	1.230	**7408448**

PA Polyamide

Cover plate with 1 perforation (Ø 45 mm) for one accessory with support ring, suitable for T4L and T8NL narrow side.






Cover plate, Telitank T4L/T8NL, round installation opening for EKR device, for lengthwise side

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
T8NL P2 9011	Graphite black	1	1.230	**7408458**

PA Polyamide

Cover plate with 1 perforation (Ø 45 mm) for one accessory with support ring, suitable for T4L and T8NL lengthwise side (1/2 cover).







Cover plate, Telitank T4L/T8NL, round installation opening for EKR device, for lengthwise side

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
T8NL P3 9011	Graphite black	10	2.433	**7408464**

PA Polyamide

Cover plate with 2 perforations (Ø 45 mm) for two accessories with support ring, suitable for T4L and T8NL lengthwise side (1/2 cover).






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Cover plate, Telitank T4L/T8NL, Modul 45 installation opening






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
T8NL P45 9011	Graphite black	1	2.090	**7408474**
T8NL P45 7035	Light grey	1	2.090	**7408478**

PA Polyamide

Cover plate with rectangular opening for a single Modul 45 socket, suitable for narrow side of T4L and T8NL or for lengthwise side of T4L and T8NL (1/2 cover).

Cover plate, Telitank T4L/T8NL, Modul 45 installation opening






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
T8NL P105 9011	Graphite black	1	3.760	**7408452**
T8NL P105 7035	Light grey	1	3.760	**7408456**

PA Polyamide

Cover plate with rectangular opening for a triple Modul 45 socket, suitable for lengthwise side of T4L and T8NL (1/1 cover).

Partition Telitank T4L/T8NL






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
T8NL TQ	Graphite black	1	1.700	**7408490**

PVC Polyvinylchloride

Transverse divider for additional interior division for Telitanks T4L and T8NL.

Insertion nut






Type	Pack. pcs	Weight kg/100 pcs.	Item No.
T EM	4	4.600	**7408084**

Zn Die-cast zinc

The insertion nut is suitable for fastening a Telitank on the DAT system opening of the EÜK duct, OKA.. trunking, EBK duct or AIK trunking systems. Packing unit: 4 units.

Strain relief





Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ZE2 3	10	1.400	**7408650**


PA Polyamide

Strain relief for use in universal support cover plates, in mounting boxes, module supports and T4L and T8NL Telitanks, for standard strain relief of inserted cables.

Telitank T12L

Cover plate, Telitank T12L, blank





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
T12L P01S 9011	Graphite black	1	1.610	**7408108**

PVC Polyvinylchloride

Cover plate "blank", suitable for lengthwise side of T12L (1/4 cover) or for T12L narrow side (1/2 cover).

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.


Cover plate, Telitank T12L, blank, for lengthwise side

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
T12L P02S 9011	Graphite black	1	3.220	7408116

PVC Polyvinylchloride

Cover plate "blank", suitable for lengthwise side of T12L (1/2 cover).







Cover plate, Telitank T12L, blank, for lengthwise side

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
T12L P03S 9011	Graphite black	1	4.850	7408124

PVC Polyvinylchloride

Cover plate "blank", suitable for lengthwise side of T12L (3/4 cover).







Cover plate, Telitank T12L, blank, for lengthwise side

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
T12L P04S 9011	Graphite black	1	6.460	7408132

PVC Polyvinylchloride

Cover plate "blank", suitable for lengthwise side of T12L (1/1 cover).






Cover plate, Telitank T12L, blank, for lengthwise side

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
T12L P05S 9011	Graphite black	1	2.150	7408140

PVC Polyvinylchloride

Cover plate "blank", suitable for lengthwise side of T12L (1/3 cover).






Cover plate, Telitank T12L, Modul 45 installation opening

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
T12L P15S 9011	Graphite black	1	1.400	7408148

PA Polyamide

Cover plate with rectangular opening for a Modul 45 accessory, suitable for lengthwise side of T12L (1/4 cover) or for T12L narrow side (1/2 cover).






Cover plate, Telitank T12L, Modul 45 installation opening

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
T12L P16S 9011	Graphite black	1	1.560	7408156

PA Polyamide

Cover plate with rectangular opening for a double Modul 45 socket, suitable for lengthwise side of T12L (1/3 cover).






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Cover plate, Telitank T12L, Modul 45 installation opening






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
T12L P17S 9011	Graphite black	10	2.200	7408164

PA Polyamide

Cover plate with rectangular opening for a triple Modul 45 socket, suitable for lengthwise side of T12L (1/2 cover).

Cover plate, Telitank T12L, round installation opening for EKR device







Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
T12L P1S 9011	Graphite black	1	1.100	7408172

PVC Polyvinylchloride

Cover plate with 1 perforation (Ø 45 mm) for one accessory with support ring or bracket, suitable for T12L lengthwise side (1/4 cover) or for T12L narrow side (1/2 cover).

Cover plate, Telitank T12L, round installation opening for EKR device







Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
T12L P2S 9011	Graphite black	1	2.210	7408180

PVC Polyvinylchloride

Cover plate with 2 perforations (Ø 45 mm) for 2 accessories with support ring or bracket, suitable for T12L lengthwise side (1/2 cover).

Cover plate, Telitank T12L, round installation opening for EKR device







Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
T12L P3S 9011	Graphite black	1	3.320	7408188

PVC Polyvinylchloride

Cover plate with 3 perforations (Ø 45 mm) for three accessories with support ring or bracket, suitable for T12L lengthwise side (3/4 cover).

Cover plate, Telitank T12L, round installation opening for EKR device






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
T12L P4S 9011	Graphite black	1	4.420	7408196

PVC Polyvinylchloride

Cover plate with 4 perforations (Ø 45 mm) for four accessories with support ring or bracket, suitable for T12L lengthwise side (1/1 cover).

Cover plate, Telitank T12L, installation opening for CEE device with 60 mm fastening track





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
T12L P7S 9011	Graphite black	1	1.130	7408204

PVC Polyvinylchloride

Cover plate with 1 perforation (Ø 70 mm) and 60 x 60 mm screw fastening for CEE sockets, suitable for T12L lengthwise side (1/3 cover).

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.

Insertion nut

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
T EM	4	4.600	**7408084**

Zn Die-cast zinc

The insertion nut is suitable for fastening a Telitank on the DAT system opening of the EÜK duct, OKA.. trunking, EBK duct or AIK trunking systems. Packing unit: 4 units.








Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18



GES service outlets

Service outlets supply workstations and other areas in the centre of the room with power and data connections via the floor. There are versions for dry and wet-cleaned floors. Service outlets are suitable for installation in screed-flush and screed-covered underfloor systems, as well as in system floors.

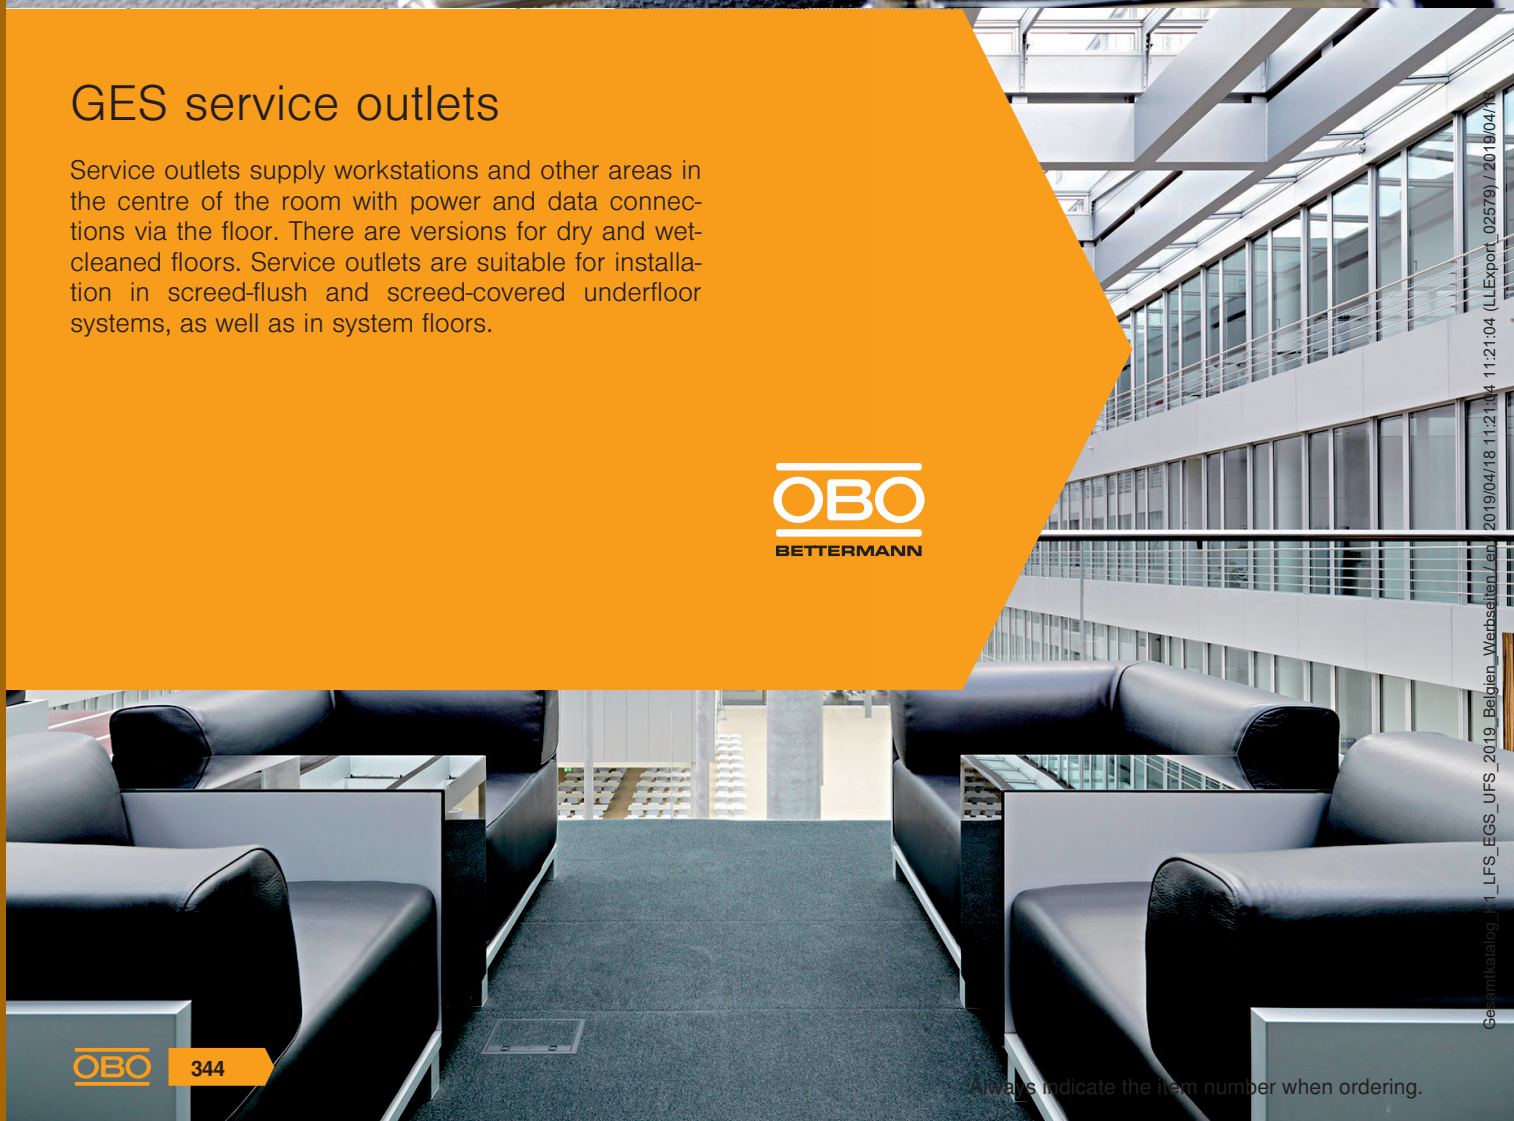

Gesamtkatalog_01_LFS_EGS_UFS_2019_Belgien_Werbseiten_en | 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

GES service outlet, rectangular

Service outlets supply workstations and other areas in the centre of the room with power and data connections via the floor. Service outlets are suitable for installation in screed-flush and screed-covered underfloor systems.

- Universal service outlet for all systems
- Suitable for dry-cleaned floors
- Available in plastic and stainless steel




- Lid available with locking slider or handle clamp
- Adjustable for different covering thicknesses

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

GES2 service outlet with handle clamp





Type	Colour	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GES2 U 7011	Iron grey	5	1	61.300	**7405116**
GES2 U 9011	Graphite black	5	1	61.300	**7405120**
GES2 U 1019	Grey-beige	5	1	61.300	**7405124**


PA Polyamide

Service outlet with handle clamp for up to 3 individual Modul 45 devices in one UT3 universal support, use in duct systems and system floors.

Up to 2 installation devices with 50 mm central plate can be inserted.

GES2DB service outlet with handle clamp





Type	Colour	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GES2 DB 7011	Iron grey	5	1	66.400	**7405100**
GES2 DB 9011	Graphite black	5	1	66.400	**7405104**
GES2 DB 1019	Grey-beige	5	1	66.400	**7405108**


PA Polyamide

Service outlet with handle clamp for up to 3 individual Modul 45 devices in one UT3 universal support, use in duct systems and system floors.

Up to 2 installation devices with 50 mm central plate can be inserted.

GES4 service outlet with handle clamp





Type	Colour	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GES4 U 7011	Iron grey	5	1	139.500	**7405196**
GES4 U 9011	Graphite black	5	1	139.500	**7405200**
GES4 U 1019	Grey-beige	5	1	139.500	**7405204**


PA Polyamide

Service outlet with handle clamp for up to 6 individual Modul 45 devices in 2 UT3 universal supports, use in duct systems and system floors.

Up to 4 installation devices with 50 mm central plate can be inserted.

GES4 service outlet with locking slider





Type	Colour	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GES4-2U10T 7011	Iron grey	10	1	114.000	**7405145**
GES4-2U10T 9011	Graphite black	10	1	124.000	**7405146**
GES4-2U10T 1019	Grey-beige	10	1	124.000	**7405147**

PA Polyamide

Service outlet with locking slider for up to 6 individual Modul 45 devices in 2 UT3 universal supports, use in duct systems and system floors.
Floor covering recess in the hinged cover pre-adjusted to 5 mm, if necessary adjustable to 3, 8 or 10 mm.

Up to 4 installation devices with 50 mm central plate can be inserted.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.


GES4M-2 service outlet with handle clamp

Type	Material symbol	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GES4M-2 10U	V2A	10	1	260.000	**7405191**

V2A Stainless steel, grade 304

Service outlet with handle clamp for up to 6 individual Modul 45 devices in 2 UT3 universal supports, use in duct systems and system floors.
Locking ladder made of galvanised sheet steel.

Up to 4 installation devices with 50 mm central plate can be inserted.







ZES4 inspection cover

Type	Colour	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ZES4-2 U10T 7011	Iron grey	10	1	158.000	**7406701**
ZES4-2 U10T 9011	Graphite black	10	1	158.000	**7406702**
ZES4-2 U10T 1019	Grey-beige	10	1	158.000	**7406703**

PA Polyamide

Draw box insert for blanking locking of a square mounting opening of nominal size 4 in trunking systems and system floors.
Floor covering recess is set to 5 mm on delivery, if necessary adjustable to 3, 8 or 10 mm.






GES6 service outlet with handle clamp

Type	Colour	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GES6 U 7011	Iron grey	5	1	157.500	**7405308**
GES6 U 9011	Graphite black	5	1	150.000	**7405312**
GES6 U 1019	Grey-beige	5	1	150.000	**7405316**

PA Polyamide

Service outlet with handle clamp for up to 9 individual Modul 45 devices in three UT3 universal supports, use in trunking systems and system floors.

Separate fastening brackets must be ordered for raised floor mounting.
Up to 6 installation devices with 50 mm central plate can be inserted.






GES6 service outlet with locking slider

Type	Colour	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GES6-2U10T 7011	Iron grey	10	1	138.000	**7405321**
GES6-2U10T 9011	Graphite black	10	1	138.000	**7405322**
GES6-2U10T 1019	Grey-beige	10	1	138.000	**7405323**

PA Polyamide

Service outlet with locking slider for up to 9 individual Modul 45 devices in 3 UT3 universal supports, use in duct systems and system floors.
Floor covering recess in the hinged cover pre-adjusted to 5 mm, if necessary adjustable to 3, 8 or 10 mm.

Up to 6 installation devices with 50 mm central plate can be inserted.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

GES service outlets for dry-cleaned floors, nominal size 6

GES6M-2 service outlet with handle clamp






Type	Material symbol	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GES6M-2 10U	V2A	10	1	320.000	**7405299**


V2A Stainless steel, grade 304

Service outlet with handle clamp for up to 9 individual Modul 45 devices in 3 UT3 universal supports, use in trunking systems and system floors.
Locking ladder made of galvanised sheet steel.

Up to 6 installation devices with 50 mm central plate can be inserted.

ZES6 inspection cover





Type	Colour	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ZES6-2 U10T 7011	Iron grey	10	1	150.000	**7406749**
ZES6-2 U10T 9011	Graphite black	10	1	150.000	**7406750**
ZES6-2 U10T 1019	Grey-beige	10	1	150.000	**7406751**


PA Polyamide

Junction box insert for blank closing of a rectangular mounting opening of nominal size 6 in an underfloor duct or trunking system or in raised floor. Polyamide floor covering profile.
Recess is 5 mm, if necessary, adjustable to 3, 8 or 10 mm.

GES service outlets for dry-cleaned floors, nominal size 9

GES9-3B service outlet with handle clamp





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GES9-3B U 7011	Iron grey	1	205.000	**7405077**
GES9-3B U 9011	Graphite black	1	205.000	**7405079**
GES9-3B U 1019	Grey-beige	1	205.000	**7405081**


PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Service outlet with handle clamp for up to 12 individual Modul 45 devices in 3 UT4 universal supports, use in trunking systems and system floors.
Floor covering recess in the hinged cover pre-adjusted to 5 mm, if necessary adjustable to 10 mm.

Up to 9 installation devices with 50 mm central plate can be inserted.

GES9-3S service outlet with locking slider





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GES9-3S U 7011	Iron grey	1	199.500	**7405083**
GES9-3S U 9011	Graphite black	1	199.500	**7405085**
GES9-3S U 1019	Grey-beige	1	199.500	**7405087**


PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Service outlet with locking slider for up to 12 individual Modul 45 devices in 3 UT4 universal supports, use in duct systems and system floors.
Floor covering recess in the hinged cover pre-adjusted to 5 mm, if necessary adjustable to 10 mm.

Up to 9 installation devices with 50 mm central plate can be inserted.

GES9M-2 service outlet with handle clamp





Type	Material symbol	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GES9M-2 10U	V2A	10	1	360.000	**7405371**

V2A Stainless steel, grade 304

Service outlet with handle clamp for up to 12 individual Modul 45 devices in 3 UT4 universal supports, use in duct systems and system floors.
Locking ladder made of galvanised sheet steel

Up to 9 installation devices with 50 mm central plate can be inserted.

Always indicate the item number when ordering.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


ZES9 inspection cover

Type	Colour	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ZES9-2 U10T 7011	Iron grey	10	1	206.300	**7406672**
ZES9-2 U10T 9011	Graphite black	10	1	206.300	**7406674**
ZES9-2 U10T 1019	Grey-beige	10	1	206.300	**7406676**

PA Polyamide

Junction box insert for blank closing of a square mounting opening of nominal size 9 in an underfloor duct or trunking system or in raised floor. Polyamide floor covering profile.
Recess is 5 mm, if necessary, adjustable to 3, 8 or 10 mm.






GES9-3 service outlet with handle clamp

Type	Colour	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GES9-3 UME 7011	Iron grey	10	1	240.000	**7405097**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

Service outlet with metal installation frame for mounting of 3 cover plates of shape APMT5, for use in UGD and UDS underfloor boxes.
Floor covering recess in the hinged cover pre-adjusted to 5 mm, if necessary adjustable to 10 mm.





Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

GES service outlets, round

Service outlets supply workstations and other areas in the centre of the room with power and data connections via the floor. There are versions for dry and wet-cleaned floors. Service outlets are suitable for installation in screed-flush and screed-covered underfloor systems.

- Universal service outlet for all systems
- Suitable for dry or wet-cleaned floors
- Adjustable for different covering thicknesses




- GESR7 and GESR9 available in aluminium or plastic
- GRAF9 suitable for wet cleaning and high load requirements of up to 7.5 kN

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

GESR4 service outlet with handle clamp

Type	Colour	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GESR4 U 7011	Iron grey	5	1	140.000	**7405436**
GESR4 U 9011	Graphite black	5	1	140.000	**7405440**
GESR4 U 1019	Grey-beige	5	1	140.000	**7405444**






PA Polyamide


Service outlet with handle clamp for up to 6 individual Modul 45 devices in 2 UT3 universal supports, use in duct systems and system floors.

Up to 4 installation devices with 50 mm central plate can be inserted.

ZESR4 inspection cover

Type	Colour	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ZESR4 U 7011	Iron grey	5	1	140.000	**7406772**
ZESR4 U 9011	Graphite black	5	1	140.000	**7406776**
ZESR4 U 1019	Grey-beige	5	1	140.000	**7406780**






PA Polyamide

Draw box insert for blanking locking of a square round mounting opening of nominal size R4 in trunking systems and system floors.

GESR7 service outlet with handle clamp

Type	Colour	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GESR7 10U 7011	Iron grey	10	1	238.200	**7405452**
GESR7 10U 9011	Graphite black	10	1	250.500	**7405456**
GESR7 10U 1019	Grey-beige	10	1	250.500	**7405460**






PA Polyamide


Service outlet with handle clamp for up to 10 individual Modul 45 devices in 2 UT3 and one UT4 universal support, use in duct systems and system floors.

Up to 7 installation devices with 50 mm central plate can be inserted.

ZESR7 inspection cover

Type	Colour	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ZESR7 10U 7011	Iron grey	10	1	225.800	**7406788**
ZESR7 10U 9011	Graphite black	10	1	225.800	**7406792**
ZESR7 10U 1019	Grey-beige	10	1	225.800	**7406796**





PA Polyamide


Junction box insert for blank closing of a round mounting opening of nominal size R7 in trunking systems and in raised and cavity floors. With universal fixing bracket.
Polyamide carpet protection frame.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

GESR9 service outlet with handle clamp





Type	Colour	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GESR9 U 7011	Iron grey	5	1	232.000	**7405528**
GESR9 U 9011	Graphite black	5	1	232.000	**7405532**
GESR9 U 1019	Grey-beige	5	1	232.000	**7405536**

PA Polyamide


Service outlet with handle clamp for up to 12 individual Modul 45 devices in 3 UT4 universal supports, use in duct systems and system floors.

Also to be used in conjunction with the MT mounting support. The number of installable accessories depends on the type of accessories.

Up to 9 installation devices with 50 mm central plate can be inserted.

GESR9 service outlet with locking slider





Type	Colour	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GESR9-2U12T 7011	Iron grey	12	1	244.000	**7405465**
GESR9-2U12T 9011	Graphite black	12	1	244.000	**7405466**
GESR9-2U12T 1019	Grey-beige	12	1	244.000	**7405467**


PA Polyamide

Service outlet with locking slider for up to 12 individual Modul 45 devices in 3 UT4 universal supports, use in duct systems and system floors.
5 mm floor covering recess in the hinged cover, if necessary, adjustable to 3, 10 or 12 mm.

Up to 9 installation devices with 50 mm central plate can be inserted.

GESR9 service outlet with carpet protection frame in hinged cover






Type	Colour	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GESR9 SR U 7011	Iron grey	5	1	270.000	**7405512**
GESR9 SR U 9011	Graphite black	5	1	270.000	**7405516**
GESR9 SR U 1019	Grey-beige	5	1	270.000	**7405520**


PA Polyamide

Service outlet with handle clamp for up to 12 individual Modul 45 devices in 3 UT4 universal supports, use in duct systems and system floors.

Up to 9 installation devices with 50 mm central plate can be inserted.

ZESR9 inspection cover





Type	Colour	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ZESR9-2 U12T7011	Iron grey	12	1	298.000	**7406805**
ZESR9-2 U12T9011	Graphite black	12	1	298.000	**7406806**
ZESR9-2 U12T1019	Grey-beige	12	1	298.000	**7406807**

PA Polyamide

Junction box insert for blank closing of a round mounting opening of nominal size R9 in trunking systems and in raised and cavity floors. With universal fixing bracket.
Polyamide carpet protection frame.
Floor covering recess 12 mm.

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

GESR9 universal service outlet


Type	Colour	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
GESR9 10U 1019	Grey-beige	10	1	249.400	**7405482**

PA Polyamide

Service unit with handle clamp for up to 12 individual Modul 45 devices in 3 UT4 universal supports, use in duct systems and system floors.

Also to be used in conjunction with the MT mounting support. The number of installable accessories depends on the type of accessories.

Up to 9 installation devices with 50 mm central plate can be inserted.





Service unit for wet-cleaned floors, nominal size R9


GRAF9 universal service outlet, wet-care with structured lid

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GRAF9-2 U 7011	Iron grey	1	246.000	**7405746**
GRAF9-2 U 9011	Graphite black	1	246.000	**7405750**
GRAF9-2 U 1019	Grey-beige	1	246.000	**7405754**

AlG Cast aluminium

Service outlet with tube body for wet-cleaned floors for up to 12 individual Modul 45 devices in 3 UT4 universal supports, use in duct systems and system floors.

Up to 9 installation devices with 50 mm central plate can be inserted.






Service outlet GRAF9-2 BA3

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GRAF9-2 BA3	–	1	258.000	**7405743**

AlG Cast aluminium

Service outlet with tube body for wet-cleaned floors for up to 12 individual Modul 45 devices in 3 UT4 universal supports, use in duct systems and system floors.
Surface: Aluminium, polished.

Up to 9 installation devices with 50 mm central plate can be inserted.






Seals for GRAF9-2 (spare part)

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
RD GRAF9-2	1	1.650	**7407099**

EPDM Ethylene propylene diene rubber DIN 1629

Round seals for GRAF9-2 and tube body - spare part.






Separating retainer (spare part)

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VTGRAF9 9011	Graphite black	1	0.800	**7408507**
VTGRAF9 7011	Iron grey	1	0.800	**7408508**

PA Polyamide

Plug consisting of a locking pin and seat as spare part for GRAF9.






Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Universal fastening bracket for 4 fastening points






Type	Pack. PU	Weight kg/100 PUs	Item No.
GES UB4	1	3.300	7407558

St Steel

Four universal fastenings for round service outlets and junction box inserts of nominal size R4 in trunking systems, raised and cavity floors and for rectangular service outlets and junction box inserts of nominal sizes 4, 6 and 9 in trunking systems. Eight universal fastenings are required to fasten the GRAF9 service outlet. Spare part.

Universal fastening bracket for 6 fastening points






Type	Pack. PU	Weight kg/100 PUs	Item No.
GES UB6	1	4.800	7407562

St Steel

Universal fastening for round service outlets and junction box inserts in trunking systems, raised and cavity floors and for rectangular service outlets and junction box inserts in trunking systems with 6 fastening points. Spare part.

Universal fastening bracket type 2 for 4 fastening points






Type	Pack. PU	Weight kg/100 PUs	Item No.
GESUB2 4	1	0.432	7407559

St Steel

Four universal fastenings with folding clamping bracket for service outlets and junction box inserts of the generation -2 with four or eight system fastenings. Spare part.

Universal fastening bracket type 2 for 6 fastening points






Type	Pack. PU	Weight kg/100 PUs	Item No.
GESUB2 6	1	0.648	7407561

St Steel

Six universal fastenings with folding clamping bracket for service outlets and junction box inserts of the generation -2 with six system fastenings. Spare part.

Fastening bracket for raised floor mounting





Type	Pack. PU	Weight kg/100 PUs	Item No.
GES4 BG DB	1	8.000	7407552


Alu Aluminium

Four fastening brackets for rectangular GES service outlets in raised floors of underfloor boxes of type UDS. Clamping range up to 65 mm.

Spare parts GES..-2

Adapter for GES4 in UA sockets





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GES4-2 Adap GEE	–	1	14.100	7405131

St Steel

FS Strip-galvanised

Adapter to accept the service unit GES4-2 for mounting in underfloor sockets of type UA240.

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18



Cassettes – height-adjustable and decouplable

The compact, flush-floor cassettes from Ackermann made by OBO provide power, data and multimedia connections in a high-quality design. The cassettes can be adjusted to the height of the floor and can be installed completely decoupled as a special construction type. They are available in round and rectangular versions. There are versions for dry, moist and wet-care floor coverings. Cassettes are suitable for raised and cavity floors and all kinds of screed-flush underfloor systems.



Gesamtkatalog_K1_LF6_EP_2019_Beigien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Height-adjustable cassettes

The compact, flush-floor cassettes from Ackermann made by OBO offer power, data and multimedia connections in the smallest areas. The height-adjustable cassettes can be adjusted exactly to the top edge of the floor covering. The cassettes can be installed inside underfloor duct systems in a screed box or in system floors. They are fastened to the raw concrete using height-adjustment units.

- Can be used in UZD underfloor sockets and system floors
- Tube body variant suitable for wet cleaning
- High stability through height-adjustment units




- Suitable for high-quality floor coverings
- Cassettes with 20 and 25 mm floor covering recess
- Available in stainless steel and brass

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Height-adjustable cassette for inspection opening, RKN, stainless steel







Type	Nominal size	Dimension h mm	Floor covering thickness mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKN2 4 VS 20	4	100	20	100 - 150	1	341.000	**7409014**
RKN2 4 VS 25	4	105	25	105 - 155	1	384.000	**7409016**

V2A Stainless steel, grade 304

Height-adjustable "blank" cassette for the creation of an inspection opening of nominal size 4 in dry or wet-care floors. Only suitable for smooth floor coverings.

Height-adjustable cassette for inspection opening, RKN, brass






Type	Nominal size	Dimension h mm	Floor covering thickness mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKN2 4 MS 20	4	100	20	100 - 150	1	321.600	**7409002**
RKN2 4 MS 25	4	105	25	105 - 155	1	456.000	**7409004**

CuZn Brass

Height-adjustable "blank" cassette for the creation of an inspection opening of nominal size 4 in dry or wet-care floors. Only suitable for smooth floor coverings.

Height-adjustable cassette with cord outlet, RKSN, stainless steel





Type	Nominal size	Dimension h mm	Floor covering thickness mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKSN2 4 VS 20	4	105	20	105 - 150	1	305.000	**7409208**
RKSN2 4 VS 25	4	110	25	110 - 155	1	318.000	**7409210**


V2A Stainless steel, grade 304

Height-adjustable cassette of nominal size 4 with cord outlet for installation of accessories in dry-cleaned floors.

Height-adjustable cassette with cord outlet, 2-compartment, for the installation of MT4 mounting support. Two type APMT2 cover plates can be installed.

Height-adjustable cassette with cord outlet, RKSN, brass





Type	Nominal size	Dimension h mm	Floor covering thickness mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKSN2 4 MS 20	4	105	20	105 - 150	1	322.400	**7409202**
RKSN2 4 MS 25	4	110	25	110 - 155	1	328.000	**7409204**


CuZn Brass

Height-adjustable cassette of nominal size 4 with cord outlet for installation of accessories in dry-care floors.

Height-adjustable cassette with cord outlet, 2-compartment, for the installation of MT4 mounting support. Two type APMT2 cover plates can be installed.

Height-adjustable cassette for tube body, RKFN, stainless steel





Type	Nominal size	Dimension h mm	Floor covering thickness mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKFN2 4 VS 20	4	105	20	105 - 150	1	295.200	**7409362**
RKFN2 4 VS 25	4	110	25	110 - 155	1	441.000	**7409364**

V2A Stainless steel, grade 304

Height-adjustable cassette of nominal size 4 for tube body for installation of accessories in dry or wet-cleaned floors.

Height-adjustable cassette with tube body, 2-compartment, for the installation of MT4 mounting support. Two type APMT2 cover plates can be installed.

Always indicate the item number when ordering.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Height-adjustable cassette for inspection opening, RKN, stainless steel

Type	Nominal size	Dimension h mm	Floor covering thickness mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKN2 9 VS 20	9	100	20	100 - 150	1	440.000	**7409044**
RKN2 9 VS 25	9	105	25	105 - 155	1	451.000	**7409046**

V2A Stainless steel, grade 304

Height-adjustable "blank" cassette for the creation of an inspection opening of nominal size 9 in dry or wet-cleaned floors. Only suitable for smooth floor coverings.






Height-adjustable cassette for inspection opening, RKN, brass

Type	Nominal size	Dimension h mm	Floor covering thickness mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKN2 9 MS 20	9	100	20	100 - 150	1	589.000	**7409022**
RKN2 9 MS 25	9	105	25	105 - 155	1	596.000	**7409024**

CuZn Brass

Height-adjustable "blank" cassette for the creation of an inspection opening of nominal size 9 in dry or wet-cleaned floors. Only suitable for smooth floor coverings.






Height-adjustable cassette with cord outlet, RKSN, stainless steel

Type	Nominal size	Dimension h mm	Floor covering thickness mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKSN2 9 VS 20	9	105	20	105 - 150	1	430.000	**7409218**
RKSN2 9 VS 25	9	110	25	110 - 155	1	444.000	**7409220**

V2A Stainless steel, grade 304

Height-adjustable cassette of nominal size 9 with cord outlet for installation of accessories in dry-care floors.

Height-adjustable cassette with cord outlet, 3-compartment, for the installation of MT9 mounting support. Three type APMT5 cover plates can be installed.







Height-adjustable cassette with cord outlet, RKSN, brass

Type	Nominal size	Dimension h mm	Floor covering thickness mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKSN2 9 MS 20	9	105	20	105 - 150	1	432.000	**7409212**
RKSN2 9 MS 25	9	110	25	110 - 155	1	619.000	**7409214**

CuZn Brass

Height-adjustable cassette with cord outlet, 3-compartment, for the installation of MT9 mounting support. Three type APMT5 cover plates can be installed.






Height-adjustable cassette for tube body, RKFN, stainless steel

Type	Nominal size	Dimension h mm	Floor covering thickness mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKFN2 9 VS 20	9	105	20	105 - 150	1	407.100	**7409368**
RKFN2 9 VS 25	9	110	25	110 - 155	1	501.000	**7409370**

V2A Stainless steel, grade 304

Height-adjustable cassette of nominal size 9 for tube body for installation of accessories in dry or wet-cleaned floors.

Height-adjustable cassette with tube body, 3-compartment, for the installation of MT9 mounting support. Three type APMT5 cover plates can be installed.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Height-adjustable cassette for inspection opening, RKR, stainless steel







Type	Nominal size	Dimension h mm	Floor covering thickness mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKR2 4V 20	R4	105	20	105 - 155	1	354.000	**7409088**
RKR2 4V 25	R4	105	25	105 - 155	1	376.000	**7409090**

V2A Stainless steel, grade 304

Height-adjustable "blank" cassette for the creation of an inspection opening of nominal size R4 in dry or wet-care floors. Only suitable for smooth floor coverings.

Height-adjustable cassette for inspection opening, RKR, brass







Type	Nominal size	Dimension h mm	Floor covering thickness mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKR2 4M 20	R4	105	20	105 - 155	1	392.000	**7409082**
RKR2 4M 25	R4	105	25	105 - 155	1	410.000	**7409084**

CuZn Brass

Height-adjustable "blank" cassette for the creation of an inspection opening of nominal size R4 in dry or wet-care floors. Only suitable for smooth floor coverings.

Height-adjustable cassette with cord outlet, RKSR, stainless steel






Type	Nominal size	Dimension h mm	Floor covering thickness mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKS2 R4 V20	R4	110	20	110 - 155	1	233.000	**7409258**
RKS2 R4 V25	R4	110	25	110 - 155	1	233.000	**7409260**


V2A Stainless steel, grade 304

Height-adjustable cassette of nominal size R4 with cord outlet for installation of accessories in dry-care floors.

Height-adjustable cassette with cord outlet, 2-compartment, for the installation of MT4 mounting support. Two type APMT2 cover plates can be installed.

Height-adjustable cassette with cord outlet, RKSR, brass






Type	Nominal size	Dimension h mm	Floor covering thickness mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKS2 R4 M20	R4	110	20	110 - 155	1	233.000	**7409252**
RKS2 R4 M25	R4	110	25	110 - 155	1	233.000	**7409254**


CuZn Brass

Height-adjustable cassette of nominal size R4 with cord outlet for installation of accessories in dry-care floors.

Height-adjustable cassette with cord outlet, 2-compartment, for the installation of MT4 mounting support. Two type APMT2 cover plates can be installed.

Height-adjustable cassette for tube body, RKFR, stainless steel





Type	Nominal size	Dimension h mm	Floor covering thickness mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKFR2 4 V20	R4	110	20	110 - 155	1	220.000	**7409422**
RKFR2 4 V25	R4	110	25	110 - 155	1	220.000	**7409424**

V2A Stainless steel, grade 304

Height-adjustable cassette of nominal size R4 for tube body for installation of accessories in dry or wet-cleaned floors.

Height-adjustable cassette with tube body, 2-compartment, for the installation of MT4 mounting support. Two type APMT2 cover plates can be installed.

Always indicate the item number when ordering.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Height-adjustable cassette for inspection opening, RKR, stainless steel

Type	Nominal size	Dimension h mm	Floor covering thickness mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKR2 7V 20	R7	105	20	105 - 155	1	548.000	**7409108**
RKR2 7V 25	R7	105	25	105 - 155	1	572.000	**7409110**

V2A Stainless steel, grade 304

Height-adjustable "blank" cassette for the creation of an inspection opening of nominal size R7 in dry or wet-cleaned floors. Only suitable for smooth floor coverings.







Height-adjustable cassette for inspection opening, RKR, brass

Type	Nominal size	Dimension h mm	Floor covering thickness mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKR2 7M 20	R7	105	20	105 - 155	1	633.000	**7409102**
RKR2 7M 25	R7	105	25	105 - 155	1	691.000	**7409104**

CuZn Brass

Height-adjustable "blank" cassette for the creation of an inspection opening of nominal size R7 in dry or wet-cleaned floors. Only suitable for smooth floor coverings.






Height-adjustable cassette with cord outlet, RKSR, stainless steel

Type	Nominal size	Dimension h mm	Floor covering thickness mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKS2 R7 V20	R7	110	20	110 - 155	1	340.000	**7409268**
RKS2 R7 V25	R7	110	25	110 - 155	1	340.000	**7409270**

V2A Stainless steel, grade 304

Height-adjustable cassette of nominal size R7 with cord outlet for installation of accessories in dry-care floors.







Height-adjustable cassette with cord outlet, RKSR, brass

Type	Nominal size	Dimension h mm	Floor covering thickness mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKS2 R7 M20	R7	110	20	110 - 155	1	350.000	**7409262**
RKS2 R7 M25	R7	110	25	110 - 155	1	350.000	**7409264**

CuZn Brass

Height-adjustable cassette of nominal size R7 with cord outlet for installation of accessories in dry-care floors.







Height-adjustable cassette for tube body, RKFR, stainless steel

Type	Nominal size	Dimension h mm	Floor covering thickness mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKFR2 7 V20	R7	110	20	110 - 155	1	325.000	**7409426**
RKFR2 7 V25	R7	110	25	110 - 155	1	325.000	**7409428**

V2A Stainless steel, grade 304

Height-adjustable cassette of nominal size R7 for tube body for installation of accessories in dry or wet-cleaned floors.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Height-adjustable cassette for inspection opening, RKR, stainless steel







Type	Nominal size	Dimension h mm	Floor covering thickness mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKR2 9V 20	R9	105	20	105 - 155	1	453.000	**7409128**
RKR2 9V 25	R9	105	25	105 - 155	1	750.000	**7409130**

V2A Stainless steel, grade 304

Height-adjustable "blank" cassette for the creation of an inspection opening of nominal size R9 in dry or wet-cleaned floors. Only suitable for smooth floor coverings.

Height-adjustable cassette for inspection opening, RKR, brass






Type	Nominal size	Dimension h mm	Floor covering thickness mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKR2 9M 20	R9	105	20	105 - 155	1	730.000	**7409122**
RKR2 9M 25	R9	105	25	105 - 155	1	796.000	**7409124**

CuZn Brass

Height-adjustable "blank" cassette for the creation of an inspection opening of nominal size R9 in dry or wet-cleaned floors. Only suitable for smooth floor coverings.

Height-adjustable cassette with cord outlet, RKSR, stainless steel






Type	Nominal size	Dimension h mm	Floor covering thickness mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKS2 R9 V20	R9	110	20	110 - 155	1	420.000	**7409278**
RKS2 R9 V25	R9	110	25	110 - 155	1	420.000	**7409280**


V2A Stainless steel, grade 304

Height-adjustable cassette of nominal size R9 with cord outlet for installation of accessories in dry-care floors.

Height-adjustable cassette with cord outlet, 3-compartment, for the installation of MT9 mounting support. Three type APMT5 cover plates can be installed.

Height-adjustable cassette with cord outlet, RKSR, brass





Type	Nominal size	Dimension h mm	Floor covering thickness mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKS2 R9 M20	R9	110	20	110 - 155	1	430.000	**7409272**
RKS2 R9 M25	R9	110	25	110 - 155	1	430.000	**7409274**


CuZn Brass

Height-adjustable cassette of nominal size R9 with cord outlet for installation of accessories in dry-care floors.

Height-adjustable cassette with cord outlet, 3-compartment, for the installation of MT9 mounting support. Three type APMT5 cover plates can be installed.

Height-adjustable cassette for tube body, RKFR, stainless steel





Type	Nominal size	Dimension h mm	Floor covering thickness mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKFR2 9 V20	R9	110	20	110 - 155	1	380.000	**7409430**
RKFR2 9 V25	R9	110	25	110 - 155	1	380.000	**7409432**

V2A Stainless steel, grade 304

Height-adjustable cassette of nominal size R9 for tube body for installation of accessories in dry or wet-cleaned floors.


Height-adjustable cassette with tube body, 3-compartment, for the installation of MT9 mounting support. Three type APMT5 cover plates can be installed.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Height adjustment unit RKNEV2

Type	Dimension h mm	Pack. PU	Weight kg/100 PUs	Item No.
RK NEV2 110	110	1	25.200	**7405815**
RK NEV2 150	150	1	30.000	**7405816**
RK NEV2 190	190	1	35.000	**7405817**
RK NEV2 230	230	1	40.000	**7405818**
RK NEV2 270	270	1	45.800	**7405819**





St Steel

G Electrogalvanised

For flush-floor height adjustment of the height adjustable cassette units and the OKB screed-flush trunking system. The VPE consists of 4 height adjustment units.


Dimensions


Dimension "h" mm	RKN2, 20 mm mm	RKN2, 25 mm mm	RK(S+F)N2, 20 mm mm	RK(S+F)N2, 25 mm mm	RKR2, 20/25 mm mm	RK(S+F)R2, 20/25 mm mm	OKB mm
110	140 - 190	145 - 195	145 - 190	150 - 195	145 - 195	150 - 195	133 - 173
150	180 - 230	185 - 235	185 - 230	190 - 235	185 - 235	190 - 235	173 - 213
190	220 - 270	225 - 275	225 - 270	230 - 275	225 - 275	230 - 275	213 - 253
230	260 - 310	265 - 315	265 - 310	270 - 315	265 - 315	270 - 315	253 - 293
270	300 - 350	305 - 355	305 - 350	310 - 355	305 - 355	310 - 355	293 - 333

Height-adjustable, decouplable cassettes, nominal size 4

Height-adjustable, decouplable cassette for inspection opening, RKNUZD3, stainless steel

Type	Nominal size	Dimension h mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKN2 UZD3 4VS20	4	90	20	1	217.000	**7409058**
RKN2 UZD3 4VS25	4	95	25	1	222.000	**7409060**







V2A Stainless steel, grade 304

Height-adjustable "blank" cassette, decoupled from the floor, for the creation of an inspection opening of nominal size 4 in dry or wet-cleaned floors, for mounting in underfloor boxes UZD250-3 or UZD350-3, either in conjunction with a blanking lid DUG../4 or in UGD250-3/4 or UGD350-3/4. Mounting takes place using levelling profiles (order separately) in the aluminium frame profile of the underfloor boxes. Only suitable for smooth floor coverings.

Height-adjustable, decouplable cassette for inspection opening, RKNUZD3, brass

Type	Nominal size	Dimension h mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKN2 UZD3 4MS20	4	90	20	1	227.000	**7409052**
RKN2 UZD3 4MS25	4	95	25	1	232.000	**7409054**






CuZn Brass


Height-adjustable "blank" cassette, decoupled from the floor, for the creation of an inspection opening of nominal size 4 in dry or wet-cleaned floors, for mounting in underfloor boxes UZD250-3 or UZD350-3, either in conjunction with a blanking lid DUG../4 or in UGD250-3/4 or UGD350-3/4. Mounting takes place using levelling profiles (order separately) in the aluminium frame profile of the underfloor boxes. Only suitable for smooth floor coverings.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Height-adjustable, decouplable cassette with cord outlet, RKSNUZD3, stainless steel







Type	Nominal size	Dimension h mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKSN2 UZD3 4VS20	4	90	20	1	274.000	**7409228**
RKSN2 UZD3 4VS25	4	95	25	1	286.000	**7409230**

V2A Stainless steel, grade 304

Height-adjustable cassette, decoupled from the floor, of nominal size 4, with cord outlet, for the installation of accessories in dry-cleaned floors, for mounting in underfloor boxes UZD250-3 or UZD350-3, either in conjunction with a blanking lid DUG../4 or in UGD250-3/4 or UGD350-3/4. Mounting takes place using levelling profiles (order separately) in the aluminium frame profile of the underfloor boxes.

Height-adjustable, decouplable cassette with cord outlet, RKSNUZD3, brass







Type	Nominal size	Dimension h mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKSN2 UZD3 4MS20	4	90	20	1	224.000	**7409222**
RKSN2 UZD3 4MS25	4	95	25	1	229.000	**7409224**

CuZn Brass

Height-adjustable cassette, decoupled from the floor, of nominal size 4, with cord outlet, for the installation of accessories in dry-cleaned floors, for mounting in underfloor boxes UZD250-3 or UZD350-3, either in conjunction with a blanking lid DUG../4 or in UGD250-3/4 or UGD350-3/4. Mounting takes place using levelling profiles (order separately) in the aluminium frame profile of the underfloor boxes.

Height-adjustable, decouplable cassette for tube body, RKFNUZD3, stainless steel







Type	Nominal size	Dimension h mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKFN2 UZD3 4VS20	4	90	20	1	197.000	**7409372**
RKFN2 UZD3 4VS25	4	95	25	1	202.000	**7409374**

V2A Stainless steel, grade 304

Height-adjustable cassette, decoupled from the floor, of nominal size 4, for tube bodies, for the installation of accessories in dry or wet-cleaned floors, for mounting in underfloor boxes UZD250-3 or UZD350-3, either in conjunction with a mounting lid DUG../4 or in UGD250-3/4 or UGD350-3/4. Mounting takes place using height adjustment brackets (order separately) in the aluminium frame profile of the underfloor boxes.

Height adjustment bracket for installation in UGD250-3 for one square cassette





Type	Material symbol	Pack. pcs	Weight kg/100 pcs.	Item No.
NW 250-3 QK	St	1	74.000	**7410540**

St Steel

FS Strip-galvanised

Height adjustment bracket to mount the square height-adjustable cassettes in the underfloor connection socket, type UZD250-3 or UGD250-3.
With all the components necessary for mounting and height adjustment.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.


Height adjustment bracket for installation in UGD350-3 for one square cassette


Type	Material symbol	Pack. pcs	Weight kg/100 pcs.	Item No.
NW 350-3 QK	St	1	94.000	**7410544**

St Steel

FS Strip-galvanised

Height adjustment bracket to mount the square height-adjustable cassettes in the underfloor connection socket, type UZD350-3 or UGD350-3.
With all the components necessary for mounting and height adjustment.







Height-adjustable, decouplable cassette for inspection opening, RKNUZD3, stainless steel

Type	Nominal size	Dimension h mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKN2 UZD3 9VS20	9	90	20	1	351.000	**7409066**
RKN2 UZD3 9VS25	9	95	25	1	359.000	**7409068**

V2A Stainless steel, grade 304

Height-adjustable "blank" cassette, decoupled from the floor, for the creation of an inspection opening of nominal size 9 in dry or wet-cleaned floors, for mounting in underfloor boxes UZD250-3 or UZD350-3, either in conjunction with a blanking lid DUG../9 or in UGD250-3/9 or UGD350-3/9. Mounting takes place using levelling profiles (order separately) in the aluminium frame profile of the underfloor boxes. Only suitable for smooth floor coverings.







Height-adjustable, decouplable cassette for inspection opening, RKNUZD3, brass

Type	Nominal size	Dimension h mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKN2 UZD3 9MS20	9	90	20	1	361.000	**7409062**
RKN2 UZD3 9MS25	9	95	25	1	440.600	**7409064**

CuZn Brass

Height-adjustable "blank" cassette, decoupled from the floor, for the creation of an inspection opening of nominal size 9 in dry or wet-cleaned floors, for mounting in underfloor boxes UZD250-3 or UZD350-3, either in conjunction with a blanking lid DUG../9 or in UGD250-3/9 or UGD350-3/9. Mounting takes place using levelling profiles (order separately) in the aluminium frame profile of the underfloor boxes. Only suitable for smooth floor coverings.







Height-adjustable, decouplable cassette with cord outlet, RKSNUZD3, stainless steel

Type	Nominal size	Dimension h mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKSN2 UZD3 9VS20	9	90	20	1	338.000	**7409238**
RKSN2 UZD3 9VS25	9	95	25	1	346.000	**7409240**

V2A Stainless steel, grade 304

Height-adjustable cassette, decoupled from the floor, of nominal size 9, with cord outlet, for the installation of accessories in dry-cleaned floors, for mounting in underfloor boxes UZD250-3 or UZD350-3, either in conjunction with a blanking lid DUG../9 or in UGD250-3/9 or UGD350-3/9. Mounting takes place using levelling profiles (order separately) in the aluminium frame profile of the underfloor boxes.







Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Height-adjustable, decouplable cassette with cord outlet, RKSNUZD3, brass







Type	Nominal size	Dimension h mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKSN2 UZD3 9MS20	9	90	20	1	348.000	**7409232**
RKSN2 UZD3 9MS25	9	95	25	1	356.000	**7409234**

CuZn Brass

Height-adjustable cassette, decoupled from the floor, of nominal size 9, with cord outlet, for the installation of accessories in dry-cleaned floors, for mounting in underfloor boxes UZD250-3 or UZD350-3, either in conjunction with a blanking lid DUG../9 or in UGD250-3/9 or UGD350-3/9. Mounting takes place using levelling profiles (order separately) in the aluminium frame profile of the underfloor boxes.

Height-adjustable, decouplable cassette for tube body, RKFNUZD3, stainless steel







Type	Nominal size	Dimension h mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKFN2UZD3 9VS20	9	90	20	1	346.000	**7409378**
RKFN2UZD3 9VS25	9	95	25	1	346.000	**7409380**

V2A Stainless steel, grade 304

Height-adjustable cassette, decoupled from the floor, of nominal size 9, for tube bodies, for the installation of accessories in dry or wet-cleaned floors, for mounting in underfloor boxes UZD250-3 or UZD350-3, either in conjunction with a mounting lid DUG../9 or in UGD250-3/9 or UGD350-3/9. Mounting takes place using height adjustment brackets (order separately) in the aluminium frame profile of the underfloor boxes.

Height adjustment bracket for installation in UGD250-3 for one square cassette





Type	Material symbol	Pack. pcs	Weight kg/100 pcs.	Item No.
NW 250-3 QK	St	1	74.000	**7410540**


St Steel

FS Strip-galvanised

Height adjustment bracket to mount the square height-adjustable cassettes in the underfloor connection socket, type UZD250-3 or UGD250-3.
With all the components necessary for mounting and height adjustment.

Height adjustment bracket for installation in UGD350-3 for one square cassette





Type	Material symbol	Pack. pcs	Weight kg/100 pcs.	Item No.
NW 350-3 QK	St	1	94.000	**7410544**

St Steel

FS Strip-galvanised

Height adjustment bracket to mount the square height-adjustable cassettes in the underfloor connection socket, type UZD350-3 or UGD350-3.
With all the components necessary for mounting and height adjustment.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.

Height-adjustable, decouplable cassette for inspection opening, RKRNUZD3, stainless steel

Type	Nominal size	Dimension h mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKRN2UZD3R4VS20	R4	94	20	1	194.000	**7409138**
RKRN2UZD3R4VS25	R4	94	25	1	194.000	**7409140**

V2A Stainless steel, grade 304

Height-adjustable "blank" cassette, decoupled from the floor, for the creation of an inspection opening of nominal size R4 in dry or wet-cleaned floors, for mounting in underfloor boxes UZD250-3 or UZD350-3, either in conjunction with a blanking lid DUG..R4 or in UGD250-3R4 or UGD350-3R4. Mounting takes place using levelling profiles (order separately) in the aluminium frame profile of the underfloor boxes. Only suitable for smooth floor coverings.






Height-adjustable, decouplable cassette for inspection opening, RKRNUZD3, brass

Type	Nominal size	Dimension h mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKRN2UZD3R4MS20	R4	94	20	1	197.000	**7409132**
RKRN2UZD3R4MS25	R4	94	25	1	197.000	**7409134**

CuZn Brass

Height-adjustable "blank" cassette, decoupled from the floor, for the creation of an inspection opening of nominal size R4 in dry or wet-cleaned floors, for mounting in underfloor boxes UZD250-3 or UZD350-3, either in conjunction with a blanking lid DUG..R4 or in UGD250-3R4 or UGD350-3R4. Mounting takes place using levelling profiles (order separately) in the aluminium frame profile of the underfloor boxes. Only suitable for smooth floor coverings.






Height-adjustable, decouplable cassette with cord outlet, RKSRNUZD3, stainless steel

Type	Nominal size	Dimension h mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKSRN2UZD3R4VS20	R4	94	20	1	200.000	**7409288**
RKSRN2UZD3R4VS25	R4	94	25	1	200.000	**7409290**

V2A Stainless steel, grade 304

Height-adjustable cassette, decoupled from the floor, of nominal sized R4, with cord outlet, for the installation of accessories in dry-cleaned floors, for mounting in underfloor boxes UZD250-3 or UZD350-3, either in conjunction with a mounting lid DUG..R4 or in UGD250-3R4 or UGD350-3R4. Mounting takes place using height adjustment brackets (order separately) in the aluminium frame profile of the underfloor boxes.







Height-adjustable, decouplable cassette with cord outlet, RKSRNUZD3, brass

Type	Nominal size	Dimension h mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKSRN2UZD3R4MS20	R4	94	20	1	208.000	**7409282**
RKSRN2UZD3R4MS25	R4	94	25	1	203.000	**7409284**

CuZn Brass

Height-adjustable cassette, decoupled from the floor, of nominal sized R4, with cord outlet, for the installation of accessories in dry-cleaned floors, for mounting in underfloor boxes UZD250-3 or UZD350-3, either in conjunction with a mounting lid DUG..R4 or in UGD250-3R4 or UGD350-3R4. Mounting takes place using height adjustment brackets (order separately) in the aluminium frame profile of the underfloor boxes.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Height-adjustable, decouplable cassette for tube body, RKFRNUZD3, stainless steel







Type	Nominal size	Dimension h mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKFRN2UZD3R4VS20	R4	94	20	1	174.000	**7409442**
RKFRN2UZD3R4VS25	R4	94	25	1	174.000	**7409444**

V2A Stainless steel, grade 304

Height-adjustable cassette, decoupled from the floor, of nominal size R4, for tube bodies, for the installation of accessories in dry or wet-cleaned floors, for mounting in underfloor boxes UZD250-3 or UZD350-3, either in conjunction with a mounting lid DUG..R4 or in UGD250-3R4 or UGD350-3R4. Mounting takes place using height adjustment brackets (order separately) in the aluminium frame profile of the underfloor boxes.

Height adjustment bracket for installation in UGD250-3 for one round cassette





Type	Material symbol	Pack. pcs	Weight kg/100 pcs.	Item No.
NW 250-3 RK	St	1	130.000	**7410552**


St Steel

FS Strip-galvanised

Height adjustment bracket to mount the round height-adjustable cassettes in the underfloor box, type UGD250-3.
With all the components necessary for mounting and height adjustment.

Height adjustment bracket for installation in UGD350-3 for one round cassette





Type	Material symbol	Pack. pcs	Weight kg/100 pcs.	Item No.
NW 350-3 RK	St	1	173.000	**7410556**


St Steel

FS Strip-galvanised

Height adjustment bracket to mount the round height-adjustable cassettes in the underfloor box, type UGD350-3.
With all the components necessary for mounting and height adjustment.

Height-adjustable, decouplable cassette for inspection opening, RKRNUZD3, stainless steel





Type	Nominal size	Dimension h mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKRN2UZD3R7VS20	R7	94	20	1	294.000	**7409148**
RKRN2UZD3R7VS25	R7	94	25	1	294.000	**7409150**

V2A Stainless steel, grade 304

Height-adjustable "blank" cassette, decoupled from the floor, for the creation of an inspection opening of nominal size R7 in dry or wet-cleaned floors, for mounting in underfloor boxes UZD350-3, either in conjunction with a blanking lid DUG350-3R7 or in UGD250-3R7. Mounting takes place using levelling profiles (order separately) in the aluminium frame profile of the underfloor boxes. Only suitable for smooth floor coverings.

Always indicate the item number when ordering.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


Height-adjustable, decouplable cassette for inspection opening, RKRNUZD3, brass

Type	Nominal size	Dimension h mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKRN2UZD3R7MS20	R7	94	20	1	298.000	**7409142**
RKRN2UZD3R7MS25	R7	94	25	1	298.000	**7409144**

CuZn Brass

Height-adjustable "blank" cassette, decoupled from the floor, for the creation of an inspection opening of nominal size R7 in dry or wet-cleaned floors, for mounting in underfloor boxes UZD350-3, either in conjunction with a blanking lid DUG350-3R7 or in UGD250-3R7. Mounting takes place using levelling profiles (order separately) in the aluminium frame profile of the underfloor boxes. Only suitable for smooth floor coverings.






Height-adjustable, decouplable cassette with cord outlet, RKSRNUZD3, stainless steel

Type	Nominal size	Dimension h mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKSRN2UZD3R7VS20	R7	94	20	1	302.000	**7409298**
RKSRN2UZD3R7VS25	R7	94	25	1	302.000	**7409300**

V2A Stainless steel, grade 304

Height-adjustable cassette, decoupled from the floor, of nominal sized R7, with cord outlet, for the installation of accessories in dry-cleaned floors, for mounting in underfloor boxes UZD350-3, either in conjunction with a mounting lid DUG350-3R7 or UGD350-3R7. Mounting takes place using height adjustment brackets (order separately) in the aluminium frame profile of the underfloor boxes.







Height-adjustable, decouplable cassette with cord outlet, RKSRNUZD3, brass

Type	Nominal size	Dimension h mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKSRN2UZD3R7MS20	R7	94	20	1	306.000	**7409292**
RKSRN2UZD3R7MS25	R7	94	25	1	306.000	**7409294**

CuZn Brass

Height-adjustable cassette, decoupled from the floor, of nominal sized R7, with cord outlet, for the installation of accessories in dry-cleaned floors, for mounting in underfloor boxes UZD350-3, either in conjunction with a mounting lid DUG350-3R7 or UGD350-3R7. Mounting takes place using height adjustment brackets (order separately) in the aluminium frame profile of the underfloor boxes.






Height-adjustable, decouplable cassette for tube body, RKFRNUZD3, stainless steel

Type	Nominal size	Dimension h mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKFRN2UZD3R7VS20	R7	94	20	1	276.000	**7409446**
RKFRN2UZD3R7VS25	R7	94	25	1	276.000	**7409448**

V2A Stainless steel, grade 304

Height-adjustable cassette, decoupled from the floor, of nominal size R7, for tube bodies, for the installation of accessories in dry or wet-cleaned floors, for mounting in underfloor boxes UZD350-3, either in conjunction with a mounting lid DUG350-3R7 or UGD350-3R7. Mounting takes place using height adjustment brackets (order separately) in the aluminium frame profile of the underfloor boxes.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Height adjustment bracket for installation in UGD350-3 for one round cassette






Type	Material symbol	Pack. pcs	Weight kg/100 pcs.	Item No.
NW 350-3 RK	St	1	173.000	**7410556**


St Steel

FS Strip-galvanised

Height adjustment bracket to mount the round height-adjustable cassettes in the underfloor box, type UGD350-3.
With all the components necessary for mounting and height adjustment.

Height-adjustable, decouplable cassette for inspection opening, RKRNUZD3, stainless steel







Type	Nominal size	Dimension h mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKRN2UZD3R9VS20	R9	94	20	1	358.000	**7409158**
RKRN2UZD3R9VS25	R9	94	25	1	358.000	**7409160**

V2A Stainless steel, grade 304

Height-adjustable "blank" cassette, decoupled from the floor, for the creation of an inspection opening of nominal size R9 in dry or wet-cleaned floors, for mounting in underfloor boxes UZD350-3, either in conjunction with a blanking lid DUG350-3R9 or in UGD250-3R9. Mounting takes place using levelling profiles (order separately) in the aluminium frame profile of the underfloor boxes. Only suitable for smooth floor coverings.

Height-adjustable, decouplable cassette for inspection opening, RKRNUZD3, brass







Type	Nominal size	Dimension h mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKRN2UZD3R9MS20	R9	94	20	1	362.000	**7409152**
RKRN2UZD3R9MS25	R9	94	25	1	362.000	**7409154**

CuZn Brass

Height-adjustable "blank" cassette, decoupled from the floor, for the creation of an inspection opening of nominal size R9 in dry or wet-cleaned floors, for mounting in underfloor boxes UZD350-3, either in conjunction with a blanking lid DUG350-3R9 or in UGD250-3R9. Mounting takes place using levelling profiles (order separately) in the aluminium frame profile of the underfloor boxes. Only suitable for smooth floor coverings.

Height-adjustable, decouplable cassette with cord outlet, RKSRNUZD3, stainless steel





Type	Nominal size	Dimension h mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKSRN2UZD3R9VS20	R9	94	20	1	368.000	**7409308**
RKSRN2UZD3R9VS25	R9	94	25	1	368.000	**7409310**

V2A Stainless steel, grade 304

Height-adjustable cassette, decoupled from the floor, of nominal sized R9, with cord outlet, for the installation of accessories in dry-cleaned floors, for mounting in underfloor boxes UZD350-3, either in conjunction with a mounting lid DUG350-3R9 or UGD350-3R9. Mounting takes place using height adjustment brackets (order separately) in the aluminium frame profile of the underfloor boxes.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.


Height-adjustable, decouplable cassette with cord outlet, RKSRNUZD3, brass

Type	Nominal size	Dimension h mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKSRN2UZD3R9MS20	R9	94	20	1	372.000	**7409302**
RKSRN2UZD3R9MS25	R9	94	25	1	372.000	**7409304**

CuZn Brass

Height-adjustable cassette, decoupled from the floor, of nominal sized R9, with cord outlet, for the installation of accessories in dry-cleaned floors, for mounting in underfloor boxes UZD350-3, either in conjunction with a mounting lid DUG350-3R9 or UGD350-3R9. Mounting takes place using height adjustment brackets (order separately) in the aluminium frame profile of the underfloor boxes.







Height-adjustable, decouplable cassette for tube body, RKFRNUZD3, stainless steel

Type	Nominal size	Dimension h mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKFRN2UZD3R9VS20	R9	94	20	1	336.000	**7409450**
RKFRN2UZD3R9VS25	R9	94	25	1	336.000	**7409452**

V2A Stainless steel, grade 304

Height-adjustable cassette, decoupled from the floor, of nominal size R9, for tube bodies, for the installation of accessories in dry or wet-cleaned floors, for mounting in underfloor boxes UZD350-3, either in conjunction with a mounting lid DUG350-3R9 or UGD350-3R9. Mounting takes place using height adjustment brackets (order separately) in the aluminium frame profile of the underfloor boxes.






Height adjustment bracket for installation in UGD350-3 for one round cassette


Type	Material symbol	Pack. pcs	Weight kg/100 pcs.	Item No.
NW 350-3 RK	St	1	173.000	**7410556**

St Steel

FS Strip-galvanised

Height adjustment bracket to mount the round height-adjustable cassettes in the underfloor box, type UGD350-3.
With all the components necessary for mounting and height adjustment.





Tube body


Tube body with cover plate, without handle clamp, for frame cassette and height-adjustable cassette

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
TUK2 V	1	59.000	**7428141**

Zn Die-cast zinc

N Nickel-plated

Height-adjustable cord outlet for installation in RKF frame cassettes and in height-adjustable round and square RKFR and RKFN cassettes. Raised height when used, flushfloor when unused. Use in wet-care floors. Tube body cover made of V2A.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Tube body with cover plate, with handle clamp, for frame cassette and height-adjustable cassette





Type	Pack. pcs	Weight kg/100 pcs.	Item No.
TUK2 GV	1	59.000	**7428140**


Zn Die-cast zinc

N Nickel-plated

Height-adjustable cord outlet for installation in RKF frame cassettes and in height-adjustable round and square RKFR and RKFN cassettes. Raised height when used, flushfloor when unused. Use in wet-care floors. Tube body cover and handle made of V2A.

Tube body with floor covering recess, with handle clamp, for frame cassette and height-adjustable cassette





Type	Pack. pcs	Weight kg/100 pcs.	Item No.
TUK2 G4	1	45.000	**7428142**

Zn Die-cast zinc


N Nickel-plated

Height-adjustable cord outlet for installation in RKF frame cassettes and in height-adjustable round and square RKFR and RKFN cassettes. Raised height when used, flushfloor when unused. Use in wet-care floors. With 4 mm floor covering recess for construction-side panelling with cut resistant floor covering, with handle clamp.

Polishable cassette lined body for ready-to-lay screeds / Terrazzo

Terrazzo lined body for height-adjustable cassettes, nominal size R4





Type	Dimension a mm	Dimension A mm	Dimension h mm	Nominal size	Pack. pcs	Weight kg/100 pcs.	Item No.
SK RK4R	218	270	55	R4	1	210.000	**7404382**


St Steel

FS Strip-galvanised

Expansion and additional parts for frame cassettes

Mounting set for frame cassettes – MS250-3 3UT4





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MS250-3 3UT4	–	1	73.700	**7407643**

St Steel

FS Strip-galvanised

Mounting set with three universal supports of type UT3 for suspended installation in the underfloor junction and branch box UZD250-3.

Always indicate the item number when ordering.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18



ACKERMANN
MADE BY OBO

Heavy-duty systems

Heavy-duty systems reliably supply areas with high load requirements with power, data and multimedia technology via the floor. Car dealerships, museums, airports, stations or hotels are typical areas of application. The construction and the material thickness is specially matched to the high load requirements. With the heavy-duty system, Ackermann made by OBO guarantees a particularly robust, safe and long-lasting installation solution.

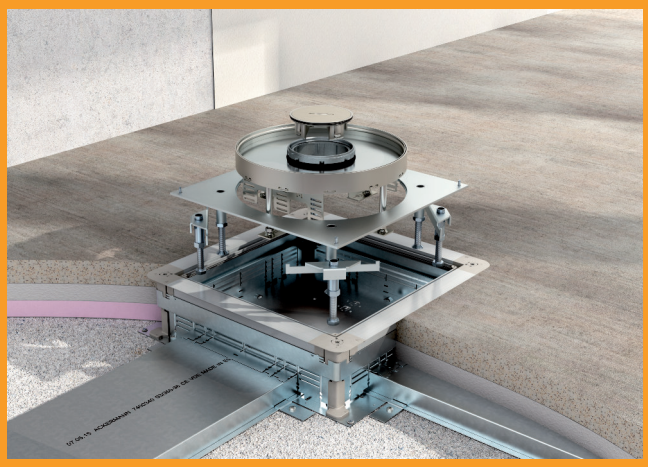





Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

UZD250-3 for screed height 70–125 mm

Type	Dimension A mm	Dimension B mm	Dimension a mm	Dimension b mm	Screed height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UZD 250-3	367	410	262	283	70 - 125	1	420.000	**7410030**
UZD 115170 250-3	367	410	262	283	115 - 170	1	480.000	**7410043**
UZD 165220 250-3	367	410	262	283	165 - 220	1	530.000	**7410052**





St Steel


FS Strip-galvanised

Underfloor junction and branch box for screed-covered underfloor installation systems.

Side walls are prepared for duct widths 190 and 250 mm.

DSSL heavy-duty support

Type	Screed height mm	Pack. PU	Weight kg/100 PUs	Item No.
DSSL2 75	75 - 110	1	97.840	**7410581**
DSSL2 105	105 - 140	1	111.040	**7410583**
DSSL2 135	135 - 170	1	121.840	**7410585**
DSSL2 165	165 - 200	1	132.640	**7410587**
DSSL2 195	195 - 230	1	143.840	**7410589**





St Steel


FS Strip-galvanised

The heavy-duty supports reinforce the corner areas of the type UZD-3 underfloor box for increased load requirements.

The VPE consists of four heavy-duty supports.

Height compensation set for UZD/UGD250-3 with height 70–125 mm

Type	Screed height mm	Dimension A mm	Dimension B mm	Dimension l mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ASH250-3 B115170	115 - 170	330	80	112	1	76.500	**7410142**
ASH250-3 B165220	165 - 220	330	130	162	1	120.000	**7410148**






St Steel


FS Strip-galvanised

Height compensation set for underfloor boxes UZD250-3 and UGD250-3 with a construction height of 70 to 125 mm for construction stacking of the UZD/UGD, consisting of four fall plates, four height adjustment screws and four rotary locks.

Height compensation set for UZD250-3 with height 115–170 mm

Type	Screed height mm	Dimension A mm	Dimension B mm	Dimension l mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ASH250-3 165220	165 - 220	330	80	162	1	82.000	**7410146**






St Steel


FS Strip-galvanised

Height compensation set for underfloor boxes UZD250-3 with a construction height of 115 to 170 mm for construction stacking of the UZD/UGD, consisting of four fall plates, four height adjustment screws and four rotary locks.

Height compensation set for UZD250-3 with height 165–220 mm

Type	Screed height mm	Dimension A mm	Dimension B mm	Dimension l mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ASH250-3 215270	215 - 270	330	80	212	1	85.000	**7410158**





St Steel


FS Strip-galvanised


Height compensation set for underfloor boxes UZD250-3 with a construction height of 165 to 220 mm for construction stacking of the UZD/UGD, consisting of four fall plates, four height adjustment screws and four rotary locks.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Heavy-duty frame cassette, blank, RKSL, nominal 250-3, load class 1







Type	Dimension A mm	Dimension B mm	Dimension C mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RK SL1 V2 20	324	288	282	18	1	517.000	**7405892**
RK SL1 V2 25	324	288	282	23	1	537.000	**7405896**
RK SL1 V2 30	324	288	282	28	1	555.000	**7405900**
RK SL1 V2 40	324	288	282	38	1	608.000	**7405908**

V2A Stainless steel, grade 304

"Blank" heavy-duty frame cassette for the creation of an inspection opening in the UZD250-3 in dry or wet-cleaned floors. Load class 1 to 10 kN. Only suitable for smooth floor coverings.

Heavy-duty frame cassette for tube body, RKFSL, nominal 250-3, load class 1







Type	Dimension A mm	Dimension B mm	Dimension C mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKF2 SL1 V2 20	324	288	282	18	1	489.000	**7409482**
RKF2 SL1 V2 25	324	288	282	23	1	508.000	**7409484**
RKF2 SL1 V2 30	324	288	282	28	1	526.000	**7409486**
RKF2 SL1 V2 40	324	288	282	38	1	559.000	**7409490**

V2A Stainless steel, grade 304

Heavy-duty frame cassette for tube body for the installation of accessories in the UZD250-3 in dry or wet-cleaned floors. Load class 1 to 10 kN.

Heavy-duty frame cassette, blank, RKSL, nominal 250-3, load class 2







Type	Dimension A mm	Dimension B mm	Dimension C mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RK SL2 V2 20	324	288	282	14	1	756.000	**7405932**
RK SL2 V2 25	324	288	282	19	1	775.000	**7405936**
RK SL2 V2 30	324	288	282	24	1	794.000	**7405940**
RK SL2 V2 40	324	288	282	34	1	833.000	**7405948**

V2A Stainless steel, grade 304

"Blank" heavy-duty frame cassette for the creation of an inspection opening in the UZD250-3 in dry or wet-cleaned floors. Load class 2 to 20 kN. Only suitable for smooth floor coverings.

Heavy-duty frame cassette for tube body, RKFSL, nominal 250-3, load class 2







Type	Dimension A mm	Dimension B mm	Dimension C mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKF2 SL2 V2 20	324	288	282	14	1	700.000	**7409522**
RKF2 SL2 V2 25	324	288	282	19	1	719.000	**7409524**
RKF2 SL2 V2 30	324	288	282	24	1	738.000	**7409526**
RKF2 SL2 V2 40	324	288	282	34	1	777.000	**7409530**

V2A Stainless steel, grade 304

Heavy-duty frame cassette for tube body for the installation of accessories in the UZD250-3 in dry or wet-cleaned floors. Load class 2 to 20 kN.

Heavy-duty frame cassette class 2, blank, series 250-2, with handle





Type	Dimension A mm	Dimension C mm	Height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RK SL2 V2 30 MG	294	282	49	1	720.000	**7405941**

St Steel


"Blank" heavy-duty frame cassette for the creation of an inspection opening in the UZD250-2 or UZD 350-2 in dry or wet-cleaned floors. Load class 1 to 10 kN or load class 2 to 20 kN. Only suitable for smooth floor coverings. With grip.


Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

UZD350-3 for screed height 70–125 mm

Type	Dimension A mm	Dimension B mm	Dimension a mm	Dimension b mm	Screed height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UZD 350-3	467	510	362	383	70 - 125	1	590.000	**7410034**
UZD 115170 350-3	467	510	362	383	115 - 170	1	665.000	**7410047**
UZD 165220 350-3	467	510	362	383	165 - 220	1	740.000	**7410056**





St Steel


FS Strip-galvanised

Underfloor junction and branch box for screed-covered underfloor installation systems.

Side walls prepared for duct widths of 190, 250 and 350 mm.

DSSL heavy-duty support

Type	Screed height mm	Pack. PU	Weight kg/100 PUs	Item No.
DSSL2 75	75 - 110	1	97.840	**7410581**
DSSL2 105	105 - 140	1	111.040	**7410583**
DSSL2 135	135 - 170	1	121.840	**7410585**
DSSL2 165	165 - 200	1	132.640	**7410587**
DSSL2 195	195 - 230	1	143.840	**7410589**





St Steel


FS Strip-galvanised


The heavy-duty supports reinforce the corner areas of the type UZD-3 underfloor box for increased load requirements.

The VPE consists of four heavy-duty supports.

Height compensation set for UZD/UGD350-3 with height 70–125 mm

Type	Screed height mm	Dimension A mm	Dimension B mm	Dimension l mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ASH350-3 B115170	115 - 170	430	80	112	1	97.000	**7410150**
ASH350-3 B165220	165 - 220	430	130	162	1	151.500	**7410156**






St Steel


FS Strip-galvanised

Height compensation set for underfloor boxes UZD350-3 and UGD350-3 with a construction height of 70 to 125 mm for construction stacking of the UZD/UGD, consisting of four fall plates, four height adjustment screws and four rotary locks.

Height compensation set for UZD350-3 with height 115–170 mm

Type	Screed height mm	Dimension A mm	Dimension B mm	Dimension l mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ASH350-3 165220	165 - 220	430	80	162	1	102.500	**7410154**






St Steel


FS Strip-galvanised

Height compensation set for underfloor boxes UZD350-3 with a construction height of 115 to 170 mm for construction stacking of the UZD/UGD, consisting of four fall plates, four height adjustment screws and four rotary locks.

Height compensation set for UZD350-3 with height 165–220 mm

Type	Screed height mm	Dimension A mm	Dimension B mm	Dimension l mm	Pack. pcs	Weight kg/100 pcs.	Item No.
ASH350-3 215270	215 - 270	430	80	212	1	105.000	**7410164**





St Steel


FS Strip-galvanised


Height compensation set for underfloor boxes UZD350-3 with a construction height of 165 to 220 mm for construction stacking of the UZD/UGD, consisting of four fall plates, four height adjustment screws and four rotary locks.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Heavy-duty frame cassette, blank, RKSL, nominal 350-3, load class 1







Type	Dimension A mm	Dimension B mm	Dimension C mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RK SL1 V3 20	424	388	382	18	1	897.000	**7405912**
RK SL1 V3 25	424	388	382	23	1	927.000	**7405916**
RK SL1 V3 30	424	388	382	28	1	953.000	**7405920**
RK SL1 V3 40	424	388	382	38	1	1,017.000	**7405928**

V2A Stainless steel, grade 304

"Blank" heavy-duty frame cassette for the creation of an inspection opening in the UZD350-3 in dry or wet-cleaned floors. Load class 1 to 10 kN. Only suitable for smooth floor coverings.

Heavy-duty frame cassette for tube body, RKFSL, nominal 350-3, load class 1







Type	Dimension A mm	Dimension B mm	Dimension C mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKF2 SL1 V3 20	424	388	382	18	1	912.000	**7409502**
RKF2 SL1 V3 25	424	388	382	23	1	941.000	**7409504**
RKF2 SL1 V3 30	424	388	382	28	1	968.000	**7409506**
RKF2 SL1 V3 40	424	388	382	38	1	1,032.000	**7409510**

V2A Stainless steel, grade 304

Heavy-duty frame cassette for tube body for the installation of accessories in the UZD350-3 in dry or wet-cleaned floors. Load class 1 to 10 kN.

Heavy-duty frame cassette, blank, RKSL, nominal 350-3, load class 2







Type	Dimension A mm	Dimension B mm	Dimension C mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RK SL2 V3 20	424	388	382	14	1	1,346.000	**7405952**
RK SL2 V3 25	424	388	382	19	1	1,377.000	**7405956**
RK SL2 V3 30	424	388	382	24	1	1,400.000	**7405960**
RK SL2 V3 40	424	388	382	34	1	1,466.000	**7405968**

V2A Stainless steel, grade 304

"Blank" heavy-duty frame cassette for the creation of an inspection opening in the UZD350-3 in dry or wet-cleaned floors. Load class 2 to 20 kN. Only suitable for smooth floor coverings.

Heavy-duty frame cassette for tube body, RKFSL, nominal 350-3, load class 2





Type	Dimension A mm	Dimension B mm	Dimension C mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKF2 SL2 V3 20	424	388	382	14	1	1,278.000	**7409542**
RKF2 SL2 V3 25	424	388	382	19	1	1,307.000	**7409544**
RKF2 SL2 V3 30	424	388	382	24	1	1,334.000	**7409546**
RKF2 SL2 V3 40	424	388	382	34	1	1,398.000	**7409550**

V2A Stainless steel, grade 304

Heavy-duty frame cassette for tube body for the installation of accessories in the UZD350-3 in dry or wet-cleaned floors. Load class 2 to 20 kN.

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Mounting set for UZD250-3


Type	Pack. pcs	Weight kg/100 pcs.	Item No.
MS3 3UT3	1	49.400	**7407651**

St Steel

FS Strip-galvanised

Mounting set with three universal supports of type UT3 for installation in the underfloor junction and branch box UZD250-3.

Cover plates should be ordered separately.





Mounting set for UZD350-3


Type	Pack. pcs	Weight kg/100 pcs.	Item No.
MS3 3UT4	1	55.000	**7407655**

St Steel

FS Strip-galvanised

Mounting set with three universal supports of type UT4 for installation in the underfloor junction and branch box UZD350-3.

Cover plates should be ordered separately.






Heavy-duty mounting lid for 250-3, nominal size 4

Type	Dimension A mm	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
DUG 250-3 4SL	282	201	1	146.500	**7401404**

St Steel

FS Strip-galvanised

The heavy-duty mounting lid for the type UZD250-3 underfloor box is suitable for installation in a square heavy-duty cassette of nominal size 4. The installation opening is recessed by 3 mm and can be closed subsequently by a lid blanking plate.





Height adjustment unit for heavy-duty mounting lid


Type	Screed height mm	Pack. PU	Weight kg/100 PUs	Item No.
DUG SL75	75 - 110	1	24.917	**7409680**
DUG SL105	105 - 140	1	36.184	**7409682**
DUG SL135	135 - 170	1	44.632	**7409684**
DUG SL165	165 - 200	1	53.586	**7409686**
DUG SL195	195 - 230	1	62.041	**7409688**

St Steel

G Electrogalvanised

The height adjustment units rated for increased load requirements permit the screed-flush height adjustment of the heavy-duty mounting lid and are to be ordered separately.

The VPE consists of four height adjustment units.






Height-adjustable heavy-duty cassette, blank, RKNSL, nominal size 4, stainless steel

Type	Dimension h mm	Floor covering thickness mm	Floor height mm	Material symbol	Pack. pcs	Weight kg/100 pcs.	Item No.
RKN2 4 VMSL1N 15	100	15	100 - 150	V2A	1	389.000	**7409008**
RKN2 4 VMSL1N 20	105	20	105 - 155	V2A	1	400.000	**7409010**

V2A Stainless steel, grade 304

Heavy-duty "blank" square cassette of nominal size 4 for the creation of an inspection opening in trunking systems, raised or cavity floors, in dry or wet-cleaned floors. Load class 1 to 10 kN. Only suitable for smooth floor coverings.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Height-adjustable heavy-duty cassette for tube body RKFNSL, nominal size 4, stainless steel







Type	Dimension h mm	Floor covering thickness mm	Floor height mm	Material symbol	Pack. pcs	Weight kg/100 pcs.	Item No.
RKFN2 4 VMSL1N15	100	15	100 - 150	V2A	1	355.500	**7409382**
RKFN2 4 VMSL1N20	105	20	105 - 155	V2A	1	367.000	**7409384**

V2A Stainless steel, grade 304

Heavy-duty square cassette for tube body of nominal size 4 for the installation of accessories in trunking systems, raised or cavity floors, in dry or wet-cleaned floors. Load class 1 to 10 kN.

Height-adjustable cassette with brush bar, RKSN, stainless steel





Type	Floor covering thickness mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
RKS BN V9 25	25	–	1	438.000	**7406603**


V2A Stainless steel, grade 304

Height-adjustable cassette of nominal size 9 with cord outlet for installation of accessories in dry-cleaned floors.

Up to 11 installation devices of type FLF can be installed.

Heavy-duty mounting lid for 250-3, nominal size R4





Type	Dimension A mm	Dimension d Ø mm	Pack. pcs	Weight kg/100 pcs.	Item No.
DUG 250-3 R4SL	282	215	1	159.300	**7401406**


St Steel

FS Strip-galvanised

The heavy-duty mounting lid for the UZD250-3 underfloor box is suitable for the installation of a round heavy-duty cassette of nominal size R4. The installation opening is recessed by 3 mm and can be closed subsequently by a lid blanking plate.

Height adjustment unit for heavy-duty mounting lid





Type	Screed height mm	Pack. PU	Weight kg/100 PUs	Item No.
DUG SL75	75 - 110	1	24.917	**7409680**
DUG SL105	105 - 140	1	36.184	**7409682**
DUG SL135	135 - 170	1	44.632	**7409684**
DUG SL165	165 - 200	1	53.586	**7409686**
DUG SL195	195 - 230	1	62.041	**7409688**

St Steel

G Electrogalvanised

The height adjustment units rated for increased load requirements permit the screed-flush height adjustment of the heavy-duty mounting lid and are to be ordered separately.

The VPE consists of four height adjustment units.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.

Height-adjustable heavy-duty cassette, blank, RKRSL, nominal size R4, stainless steel

Type	Dimension h mm	Floor covering thickness mm	Floor height mm	Material symbol	Pack. pcs	Weight kg/100 pcs.	Item No.
RKR2 4SL2 V2 20	105	20	105 - 155	V2A	1	559.000	**7409072**
RKR2 4SL2 V2 25	109	25	109 - 159	V2A	1	624.000	**7409074**

V2A Stainless steel, grade 304

Round, "blank", heavy-duty cassette of nominal size R4 for the creation of an inspection opening in trunking systems, raised and cavity floors, in dry or wet-care floors. Load class 2 to 20 kN. Only suitable for smooth floor coverings.







Height-adjustable heavy-duty cassette for tube body RKFRSL, nominal size R4, stainless steel

Type	Dimension h mm	Floor covering thickness mm	Floor height mm	Material symbol	Pack. pcs	Weight kg/100 pcs.	Item No.
RKFR2 4 SL2V2 20	110	20	105 - 155	V2A	1	604.000	**7409462**
RKFR2 4 SL2V2 25	114	25	109 - 159	V2A	1	669.000	**7409464**

V2A Stainless steel, grade 304

Round heavy-duty cassette for tube body of nominal size R4 for the installation of accessories in trunking systems, raised and cavity floors, in dry or wet-cleaned floors. Load class 2 to 20 kN.






Heavy-duty mounting lid for 350-3, nominal size 4


Type	Dimension A mm	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
DUG 350-3 4SL	383	201	1	355.600	**7401408**

St Steel

FS Strip-galvanised

The heavy-duty mounting lid for the type UZD350-3 underfloor box is suitable for installation in a square heavy-duty cassette of nominal size 4. The installation opening is recessed by 3 mm and can be closed subsequently by a lid blanking plate.





Height adjustment unit for heavy-duty mounting lid


Type	Screed height mm	Pack. PU	Weight kg/100 PUs	Item No.
DUG SL75	75 - 110	1	24.917	**7409680**
DUG SL105	105 - 140	1	36.184	**7409682**
DUG SL135	135 - 170	1	44.632	**7409684**
DUG SL165	165 - 200	1	53.586	**7409686**
DUG SL195	195 - 230	1	62.041	**7409688**

St Steel

G Electrogalvanised

The height adjustment units rated for increased load requirements permit the screed-flush height adjustment of the heavy-duty mounting lid and are to be ordered separately.

The VPE consists of four height adjustment units.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Height-adjustable heavy-duty cassette, blank, RKNSL, nominal size 4, stainless steel






Type	Dimension h mm	Floor covering thickness mm	Floor height mm	Material symbol	Pack. pcs	Weight kg/100 pcs.	Item No.
RKN2 4 VMSL1N 15	100	15	100 - 150	V2A	1	389.000	**7409008**
RKN2 4 VMSL1N 20	105	20	105 - 155	V2A	1	400.000	**7409010**

V2A Stainless steel, grade 304

Heavy-duty "blank" square cassette of nominal size 4 for the creation of an inspection opening in trunking systems, raised or cavity floors, in dry or wet-cleaned floors. Load class 1 to 10 kN. Only suitable for smooth floor coverings.

Height-adjustable heavy-duty cassette for tube body RKFNSL, nominal size 4, stainless steel






Type	Dimension h mm	Floor covering thickness mm	Floor height mm	Material symbol	Pack. pcs	Weight kg/100 pcs.	Item No.
RKFN2 4 VMSL1N15	100	15	100 - 150	V2A	1	355.500	**7409382**
RKFN2 4 VMSL1N20	105	20	105 - 155	V2A	1	367.000	**7409384**

V2A Stainless steel, grade 304

Heavy-duty square cassette for tube body of nominal size 4 for the installation of accessories in trunking systems, raised or cavity floors, in dry or wet-cleaned floors. Load class 1 to 10 kN.

Heavy-duty mounting lid for 350-3, nominal size 9





Type	Dimension A mm	Dimension a mm	Pack. pcs	Weight kg/100 pcs.	Item No.
DUG 350-3 9SL	383	244	1	294.400	**7401410**


St Steel

FS Strip-galvanised

The heavy-duty mounting lid for the type UZD350-3 underfloor box is suitable for installation in a square heavy-duty cassette of nominal size 9. The installation opening is recessed by 3 mm and can be closed subsequently by a lid blanking plate.

Height adjustment unit for heavy-duty mounting lid





Type	Screed height mm	Pack. PU	Weight kg/100 PUs	Item No.
DUG SL75	75 - 110	1	24.917	**7409680**
DUG SL105	105 - 140	1	36.184	**7409682**
DUG SL135	135 - 170	1	44.632	**7409684**
DUG SL165	165 - 200	1	53.586	**7409686**
DUG SL195	195 - 230	1	62.041	**7409688**

St Steel

G Electrogalvanised

The height adjustment units rated for increased load requirements permit the screed-flush height adjustment of the heavy-duty mounting lid and are to be ordered separately.

The VPE consists of four height adjustment units.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Height-adjustable heavy-duty cassette, blank, RKNSL, nominal size 9, stainless steel

Type	Dimension h mm	Floor covering thickness mm	Floor height mm	Material symbol	Pack. pcs	Weight kg/100 pcs.	Item No.
RKN2 9 VMSL1N 16	100	16	100 - 150	V2A	1	550.000	**7409028**
RKN2 9 VMSL1N 21	105	21	105 - 155	V2A	1	563.000	**7409030**

V2A Stainless steel, grade 304

Heavy-duty "blank" square cassette of nominal size 9 for the creation of an inspection opening in trunking systems, raised or cavity floors, in dry or wet-cleaned floors. Load class 1 to 10 kN. Only suitable for smooth floor coverings.






Height-adjustable heavy-duty cassette for tube body RKFNSL, nominal size 9, stainless steel

Type	Dimension h mm	Floor covering thickness mm	Floor height mm	Material symbol	Pack. pcs	Weight kg/100 pcs.	Item No.
RKFN2 9 VMSL1N16	100	16	100 - 150	V2A	1	501.000	**7409388**
RKFN2 9 VMSL1N21	105	21	105 - 155	V2A	1	514.000	**7409390**

V2A Stainless steel, grade 304

Heavy-duty square cassette for tube body of nominal size 9 for the installation of accessories in trunking systems, raised or cavity floors, in dry or wet-cleaned floors. Load class 1 to 10 kN.






Heavy-duty mounting lid for 350-3, nominal size R4


Type	Dimension A mm	Dimension d Ø mm	Pack. pcs	Weight kg/100 pcs.	Item No.
DUG 350-3 R4SL	383	215	1	370.400	**7401412**

St Steel

FS Strip-galvanised

The heavy-duty mounting lid for the UZD350-3 underfloor box is suitable for the installation of a round heavy-duty cassette of nominal size R4. The installation opening is recessed by 3 mm and can be closed subsequently by a lid blanking plate.





Height adjustment unit for heavy-duty mounting lid


Type	Screed height mm	Pack. PU	Weight kg/100 PUs	Item No.
DUG SL75	75 - 110	1	24.917	**7409680**
DUG SL105	105 - 140	1	36.184	**7409682**
DUG SL135	135 - 170	1	44.632	**7409684**
DUG SL165	165 - 200	1	53.586	**7409686**
DUG SL195	195 - 230	1	62.041	**7409688**

St Steel

G Electrogalvanised

The height adjustment units rated for increased load requirements permit the screed-flush height adjustment of the heavy-duty mounting lid and are to be ordered separately.

The VPE consists of four height adjustment units.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Height-adjustable heavy-duty cassette, blank, RKRSL, nominal size R4, stainless steel







Type	Dimension h mm	Floor covering thickness mm	Floor height mm	Material symbol	Pack. pcs	Weight kg/100 pcs.	Item No.
RKR2 4SL2 V2 20	105	20	105 - 155	V2A	1	559.000	**7409072**
RKR2 4SL2 V2 25	109	25	109 - 159	V2A	1	624.000	**7409074**

V2A Stainless steel, grade 304

Round, "blank", heavy-duty cassette of nominal size R4 for the creation of an inspection opening in trunking systems, raised and cavity floors, in dry or wet-care floors. Load class 2 to 20 kN. Only suitable for smooth floor coverings.

Height-adjustable heavy-duty cassette for tube body RKFRSL, nominal size R4, stainless steel







Type	Dimension h mm	Floor covering thickness mm	Floor height mm	Material symbol	Pack. pcs	Weight kg/100 pcs.	Item No.
RKFR2 4 SL2V2 20	110	20	105 - 155	V2A	1	604.000	**7409462**
RKFR2 4 SL2V2 25	114	25	109 - 159	V2A	1	669.000	**7409464**

V2A Stainless steel, grade 304

Round heavy-duty cassette for tube body of nominal size R4 for the installation of accessories in trunking systems, raised and cavity floors, in dry or wet-cleaned floors. Load class 2 to 20 kN.

Heavy-duty mounting lid for 350-3, nominal size R7





Type	Dimension A mm	Dimension d Ø mm	Pack. pcs	Weight kg/100 pcs.	Item No.
DUG 350-3 R7SL	383	275	1	370.400	**7401414**


St Steel

FS Strip-galvanised

The heavy-duty mounting lid for the UZD350-3 underfloor box is suitable for the installation of a round heavy-duty cassette of nominal size R7. The installation opening is recessed by 3 mm and can be closed subsequently by a lid blanking plate.

Height adjustment unit for heavy-duty mounting lid





Type	Screed height mm	Pack. PU	Weight kg/100 PUs	Item No.
DUG SL75	75 - 110	1	24.917	**7409680**
DUG SL105	105 - 140	1	36.184	**7409682**
DUG SL135	135 - 170	1	44.632	**7409684**
DUG SL165	165 - 200	1	53.586	**7409686**
DUG SL195	195 - 230	1	62.041	**7409688**

St Steel

G Electrogalvanised

The height adjustment units rated for increased load requirements permit the screed-flush height adjustment of the heavy-duty mounting lid and are to be ordered separately.

The VPE consists of four height adjustment units.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.

Height-adjustable heavy-duty cassette, blank, RKRSL, nominal size R7, stainless steel

Type	Dimension h mm	Floor covering thickness mm	Floor height mm	Material symbol	Pack. pcs	Weight kg/100 pcs.	Item No.
RKR2 7SL2 V2 20	105	20	105 - 155	V2A	1	894.000	**7409092**
RKR2 7SL2 V2 25	109	25	109 - 159	V2A	1	966.000	**7409094**

V2A Stainless steel, grade 304

Round, "blank", heavy-duty cassette of nominal size R7 for the creation of an inspection opening in trunking systems, raised and cavity floors, in dry or wet-cleaned floors. Load class 2 to 20 kN. Only suitable for smooth floor coverings.







Height-adjustable heavy-duty cassette for tube body RKFRSL, nominal size R7, stainless steel

Type	Dimension h mm	Floor covering thickness mm	Floor height mm	Material symbol	Pack. pcs	Weight kg/100 pcs.	Item No.
RKFR2 7 SL2V2 20	110	20	105 - 155	V2A	1	885.000	**7409466**
RKFR2 7 SL2V2 25	114	25	109 - 159	V2A	1	947.000	**7409468**

V2A Stainless steel, grade 304

Round heavy-duty cassette for tube body of nominal size R7 for the installation of accessories in trunking systems, raised and cavity floors, in dry or wet-cleaned floors. Load class 2 to 20 kN.






Heavy-duty mounting lid for 350-3, nominal size R9

Type	Dimension A mm	Dimension d Ø mm	Pack. pcs	Weight kg/100 pcs.	Item No.
DUG 350-3 R9SL	383	305	1	252.500	**7401416**

St Steel

FS Strip-galvanised

The heavy-duty mounting lid for the UZD350-3 underfloor box is suitable for the installation of a round heavy-duty cassette of nominal size R9. The installation opening is recessed by 3 mm and can be closed subsequently by a lid blanking plate.





Height adjustment unit for heavy-duty mounting lid


Type	Screed height mm	Pack. PU	Weight kg/100 PUs	Item No.
DUG SL75	75 - 110	1	24.917	**7409680**
DUG SL105	105 - 140	1	36.184	**7409682**
DUG SL135	135 - 170	1	44.632	**7409684**
DUG SL165	165 - 200	1	53.586	**7409686**
DUG SL195	195 - 230	1	62.041	**7409688**

St Steel

G Electrogalvanised

The height adjustment units rated for increased load requirements permit the screed-flush height adjustment of the heavy-duty mounting lid and are to be ordered separately.

The VPE consists of four height adjustment units.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Height-adjustable heavy-duty cassette for tube body RKFRSL, nominal size R9, stainless steel






Type	Dimension h mm	Floor covering thickness mm	Floor height mm	Material symbol	Pack. pcs	Weight kg/100 pcs.	Item No.
RKFR2 9 SL2V2 20	110	20	105 - 155	V2A	1	589.000	**7409470**
RKFR2 9 SL2V2 25	114	25	109 - 159	V2A	1	647.000	**7409472**

V2A Stainless steel, grade 304

Round heavy-duty cassette for tube body of nominal size R9 for the installation of accessories in trunking systems, raised and cavity floors, in dry or wet-cleaned floors. Load class 2 to 20 kN.

Height-adjustable heavy-duty cassette, blank, RKRSL, nominal size R9, stainless steel





Type	Dimension h mm	Floor covering thickness mm	Floor height mm	Material symbol	Pack. pcs	Weight kg/100 pcs.	Item No.
RKR2 9SL2 V2 20	105	20	105 - 155	V2A	1	664.000	**7409112**
RKR2 9SL2 V2 25	109	25	109 - 159	V2A	1	620.000	**7409114**


V2A Stainless steel, grade 304

Round, "blank", heavy-duty cassette of nominal size R9 for the creation of an inspection opening in trunking systems, raised and cavity floors, in dry or wet-cleaned floors. Load class 2 to 20 kN. Only suitable for smooth floor coverings.

Expansion and spare parts for heavy-duty cassettes

Tube body with cover plate, without handle clamp, for frame cassette and height-adjustable cassette





Type	Pack. pcs	Weight kg/100 pcs.	Item No.
TUK2 V	1	59.000	**7428141**


Zn Die-cast zinc

N Nickel-plated

Height-adjustable cord outlet for installation in RKF frame cassettes and in height-adjustable round and square RKFR and RKFN cassettes. Raised height when used, flushfloor when unused. Use in wet-care floors. Tube body cover made of V2A.

Tube body with cover plate, with handle clamp, for frame cassette and height-adjustable cassette





Type	Pack. pcs	Weight kg/100 pcs.	Item No.
TUK2 GV	1	59.000	**7428140**


Zn Die-cast zinc

N Nickel-plated

Height-adjustable cord outlet for installation in RKF frame cassettes and in height-adjustable round and square RKFR and RKFN cassettes. Raised height when used, flushfloor when unused. Use in wet-care floors. Tube body cover and handle made of V2A.

Tube body with floor covering recess, with handle clamp, for frame cassette and height-adjustable cassette





Type	Pack. pcs	Weight kg/100 pcs.	Item No.
TUK2 G4	1	45.000	**7428142**

Zn Die-cast zinc

N Nickel-plated


Height-adjustable cord outlet for installation in RKF frame cassettes and in height-adjustable round and square RKFR and RKFN cassettes. Raised height when used, flushfloor when unused. Use in wet-care floors. With 4 mm floor covering recess for construction-side panelling with cut resistant floor covering, with handle clamp.

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Height adjustment unit RKNEV2

Type	Dimension h mm	Pack. PU	Weight kg/100 PUs	Item No.
RK NEV2 110	110	1	25.200	**7405815**
RK NEV2 150	150	1	30.000	**7405816**
RK NEV2 190	190	1	35.000	**7405817**
RK NEV2 230	230	1	40.000	**7405818**
RK NEV2 270	270	1	45.800	**7405819**





St Steel

G Electrogalvanised

For flush-floor height adjustment of the height adjustable cassette units and the OKB screed-flush trunking system. The VPE consists of 4 height adjustment units.

Dimensions

Dimension "h" mm	RKN2, 20 mm mm	RKN2, 25 mm mm	RK(S+F)N2, 20 mm mm	RK(S+F)N2, 25 mm mm	RKR2, 20/25 mm mm	RK(S+F)R2, 20/25 mm mm	OKB mm
110	140 - 190	145 - 195	145 - 190	150 - 195	145 - 195	150 - 195	133 - 173
150	180 - 230	185 - 235	185 - 230	190 - 235	185 - 235	190 - 235	173 - 213
190	220 - 270	225 - 275	225 - 270	230 - 275	225 - 275	230 - 275	213 - 253
230	260 - 310	265 - 315	265 - 310	270 - 315	265 - 315	270 - 315	253 - 293
270	300 - 350	305 - 355	305 - 350	310 - 355	305 - 355	310 - 355	293 - 333

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.



ACKERMANN
MADE BY OBO

Elegant, discreet and robust

UDHOME floor sockets and floor tanks

The family of UDHOME complete units can locate power, data and multimedia connections exactly where they are required. Floor sockets and floor boxes of the UDHOME family are mounted directly on the raw floor and connected with flexible installation pipes – it couldn't be simpler.

- Easy handling from ordering to mounting
- High-quality materials and solid processing
- Maximum flexibility in equipment



UDHOME2



UDHOME4



UDHOME9

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18


UDHOME2 floor socket, with stainless steel lid, equipped

Type	Dimension h mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDHOME2 BV V	95	95 - 115	1	150.000	**7368384**

V2A Stainless steel, grade 305

Square floor socket for use in dry-care cavity and screed floors. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 95 mm, the height-adjustment range + 20 mm.
Surfaces visible in the floor covering made of: Stainless steel.

The scope of delivery contains a double protective contact socket (VDE). Up to two modular data sockets (Keystones) can be installed with optional mounting supports.






UDHOME2 floor socket, with stainless steel lid, freely equippable

Type	Dimension h mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDHOME2 BV	95	95 - 115	1	150.000	**7427019**

V2A Stainless steel, grade 305

Square floor socket for use in dry-care cavity and screed floors. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 95 mm, the height-adjustment range + 20 mm.
Up to two Modul45® sockets can be installed. In addition, up to two modular data modules (Keystones) can be installed with optional mounting supports. Surfaces visible in the floor covering made of: Brushed stainless steel.






Height extension for UDHOME2 floor socket

Type	Height adjustment range mm	Pack. pcs	Weight kg/100 pcs.	Item No.
HE60 UDHOME2	10 - 60	1	73.400	**7368400**

St Steel

FS Strip-galvanised

Height-adjustable extension for UDHOME2 floor socket.







UDHOME2 CH service outlet

Type	Dimension h mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDHOME2 V UPE	110	110 - 130	1	201.000	**7427025**

V2A Stainless steel, grade 304

Square installation unit for use in dry-care cavity and screed floors.
Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 110 mm, the height adjustment range is +20 mm.
Flushfloor cable outlet through brush bar.
Device support made of galvanised sheet steel for one FLF 6/5 and one FLF 3/5.
Lid can be covered with floor covering, 15 mm.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

UDHOME2 floor socket, with floor covering recess in stainless steel cover, equipped





Type	Dimension h mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDHOME2 V BS	85	1	210.000	**7368392**


V2A Stainless steel, grade 304

GUF Brushed and laminated

Square installation unit for use in dry-care cavity and screed floors. With recess in the hinged cover for the floor covering. Installation housing with pre-marked insertion openings for pipes (M25). Cover adjustable to top edge of floor covering using four height adjustment supports. The minimum installation depth is 85 mm, the height adjustment range + 20 mm.
The scope of delivery contains one BS socket with switch and a mounting support for up to two LJ6C data modules.
Surfaces visible in the floor covering made of brushed stainless steel.

UDHOME2 floor socket, with stainless steel cover, equipped






Type	Dimension h mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDHOME2 BV BS	75	1	185.000	**7368393**


V2A Stainless steel, grade 304

GUF Brushed and laminated

Square installation unit for use in dry-care cavity and screed floors. Installation housing with pre-marked insertion openings for pipes (M25). Cover adjustable to top edge of floor covering using four height adjustment supports. The minimum installation depth is 75 mm, the height adjustment range + 20 mm.
The scope of delivery contains one BS socket with switch and a mounting support for up to two LJ6C data modules.
Surfaces visible in the floor covering made of brushed stainless steel.

UDHOME2 floor socket, with tube body for wet-cleaned floors, equipped





Type	Dimension h mm	Installation depth mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDHOME2 VF N	110	110	110 - 130	1	323.000	**7368411**


V2A Stainless steel, A2

Square floor socket for use in wet-care cavity and screed floors. Cable exit for height-adjustable tube body. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 110 mm, the height-adjustment range + 20 mm.

The scope of delivery contains a double NF socket. Up to two modular data sockets (Keystones) can be installed with optional mounting supports.

UDHOME2 floor socket, with stainless steel cover, equipped





Type	Dimension h mm	Installation depth mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDHOME2 BV N	95	95	95 - 115	1	150.000	**7368383**

V2A Stainless steel, grade 305

GUF Brushed and laminated

Square floor socket for use in dry-care cavity and screed floors. Installation housing with pre-marked insertion openings for pipes (M25). Cover adjustable to top edge of floor covering using four height adjustment supports. The minimum installation depth is 95 mm, the height adjustment range +20 mm.
Surfaces visible in the floor covering made of: Stainless steel, material 1.4303.

The scope of delivery contains a double socket (NF). Up to two modular data sockets (Keystones) can be installed with optional mounting supports.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.

UDHOME2 floor socket, with stainless steel cover, equipped

Type	Dimension h mm	Installation depth mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDHOME2 V N	110	110	110 - 130	1	210.000	**7368398**

V2A Stainless steel, grade 305

GUF Brushed and laminated






Square floor socket with floor covering recess for use in dry-care cavity and screed floors. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 110 mm, the height-adjustment range + 20 mm.
Surfaces visible in the floor covering made of: Stainless steel.

The scope of delivery contains a double socket (NF). Up to two modular data sockets (Keystones) can be installed with optional mounting supports.

UDHOME2 floor socket, without recess

Type	Dimension h mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDHOME2 BV SA	95	95 - 115	1	150.000	**7427021**

V2A Stainless steel, grade 305







Square installation unit for use in dry-care cavity and screed floors. Installation housing with pre-marked insertion openings for pipes (M25). Cover adjustable to top edge of floor covering using four height adjustment supports. The minimum installation depth is 95 mm, the height-adjustment range + 20 mm.
The scope of delivery contains a white switched 1x socket and a 1/2 module cover. Up to two modular data sockets (Keystones) can be installed with optional mounting supports. Surfaces visible in the floor covering made of brushed stainless steel.

UDHOME2 service outlet, with 15 mm recess

Type	Dimension h mm	Floor height mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDHOME2 V SA	110	110 - 130	15	1	213.000	**7427022**

V2A Stainless steel, grade 305






Square installation unit for use in wet-care cavity and screed floors. Cable exit for height-adjustable tube body. Installation housing with pre-marked insertion openings for pipes (M25). Cover adjustable to top edge of floor covering using four height adjustment supports. The minimum installation depth is 110 mm, the height adjustment range + 20 mm.
The scope of delivery contains a white switched 1x socket and a 1/2 module cover. Up to two modular data sockets (Keystones) can be installed with optional mounting supports.


UDHOME2 service outlet with brush bar

Type	Dimension h mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDHOME2 BV UPE	95	95 - 115	1	136.000	**7427027**

V2A Stainless steel, grade 304

GUF Brushed and laminated






Square installation unit for use in dry-care cavity and screed floors.
Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 95 mm, the height adjustment range is +20 mm.
Flushfloor cable outlet through brush bar.
Device support made of galvanised sheet steel for one FLF 6/5 and one FLF 3/5.
Lid made from stainless steel, brushed.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

UDHOME2 floor socket, with stainless steel cover, equipped





Type	Dimension h mm	Installation depth mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDHOME2 BV N	95	95	95 - 115	1	150.000	**7368383**

V2A Stainless steel, grade 305


GUF Brushed and laminated


Square floor socket for use in dry-care cavity and screed floors. Installation housing with pre-marked insertion openings for pipes (M25). Cover adjustable to top edge of floor covering using four height adjustment supports. The minimum installation depth is 95 mm, the height adjustment range +20 mm.
Surfaces visible in the floor covering made of: Stainless steel, material 1.4303.

The scope of delivery contains a double socket (NF). Up to two modular data sockets (Keystones) can be installed with optional mounting supports.

Mounting support for data sockets in UDHOME2 BV V and UDHOME2 BV

Mounting support, 2 x type A






Type	Pack. pcs	Weight kg/100 pcs.	Item No.
MTGE2 2A	1	4.800	**7407846**

V2A Stainless steel, grade 304

Mounting support to accept two data connection modules of the following types: AMP TYCO: Standard 110Connect, SL Series 110Connect and Toolless, AMP-Twist; Brand-Rex: unshielded; GG45; TKM RJ MOD; Nexans: LANmark with Adapter-Clip; Siemon CAT6; 3M K6 and K10.
Dimensions of a mounting opening in mm: 20.10 x 14.80.

Mounting support, 2 x type B







Type	Pack. pcs	Weight kg/100 pcs.	Item No.
MTGE2 2B	1	3.300	**7407847**

V2A Stainless steel, grade 304

Mounting support to accept two data connection modules of the following types BTR: E-DAT; Dätwyler: MS and MS-N; Kerpen: VarioKeystone.
Dimensions of a mounting opening in mm: 19.35/21.55 x 14.85.

Mounting support, 2 x type C






Type	Pack. pcs	Weight kg/100 pcs.	Item No.
MTGE2 2C	1	4.700	**7407848**

V2A Stainless steel, grade 304

Mounting support to accept two data connection modules of the following types: Brand-Rex: shielded; EKU: E-Stone; Dätwyler: KS-T, MS-K and KU-T module; R&M: Snap-In and Keystone; Rutenbeck: UM and UMflex; SETEC: MKJ, UKJ and XKJ; Siemon TERA; Telegärtner: AMJ and UMJ.
Dimensions of a mounting opening in mm: 19.30 x 14.80.

Mounting support, 2 x type F





Type	Pack. pcs	Weight kg/100 pcs.	Item No.
MTGE2 2F	1	5.100	**7407849**

V2A Stainless steel, grade 304

Mounting support to accept two data connection modules, type Avaya/Systimax: M series.
Dimensions of a mounting opening in mm: 17.40 x 16.60.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.

Mounting support, 1 x type K

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
MTGE2 1K	1	4.400	**7407850**

V2A Stainless steel, grade 304

Mounting support to incorporate an audio or video technology connection socket, type XLR, Speakon type D.






Mounting support, 2 x type LE

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
MTGE2 2LE	1	4.800	**7407679**

V2A Stainless steel, grade 304

Mounting support to accept two data connection modules of the following types: LexCom 125 and 250.
Dimensions of a mounting opening in mm: 18.30 x 17.20.





Floor sockets


UDHOME2 floor socket, with floor covering recess in stainless steel lid, equipped

Type	Dimension h mm	Floor height mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDHOME2 V V	110	110 - 130	15	1	210.000	**7368399**

V2A Stainless steel, grade 305

Square floor socket with floor covering recess for use in dry-care cavity and screed floors. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 110 mm, the height-adjustment range + 20 mm.
Surfaces visible in the floor covering made of: Stainless steel.

The scope of delivery contains a double protective contact socket (VDE). Up to two modular data sockets (Keystones) can be installed with optional mounting supports.






UDHOME2 floor socket, with floor covering recess in stainless steel lid, freely equippable


Type	Dimension h mm	Floor height mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDHOME2 V	110	110 - 130	15	1	206.000	**7427090**

V2A Stainless steel, grade 305

Square floor socket with floor covering recess for use in dry-care cavity and screed floors. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 110 mm, the height-adjustment range + 20 mm.
Surfaces visible in the floor covering made of: Stainless steel.

Up to two Modul45® sockets can be installed. In addition, up to two modular data modules (Keystones) can be installed with optional mounting supports.






Height extension for UDHOME2 floor socket

Type	Height adjustment range mm	Pack. pcs	Weight kg/100 pcs.	Item No.
HE60 UDHOME2	10 - 60	1	73.400	**7368400**

St Steel

FS Strip-galvanised

Height-adjustable extension for UDHOME2 floor socket.







Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Mounting support, 2 x type A






Type	Pack. pcs	Weight kg/100 pcs.	Item No.
MTGE2 15 2A	1	5.500	**7407594**

V2A Stainless steel, grade 304

Mounting support to accept two data connection modules of the following types: AMP TYCO: Standard 110Connect, SL Series 110Connect and Toolless, AMP-Twist; Brand-Rex: unshielded; GG45; TKM RJ MOD; Nexans: LANmark with Adapter-Clip; Siemon CAT6; 3M K6 and K10.
Dimensions of a mounting opening in mm: 20.10 x 14.80.

Mounting support, 2 x type B







Type	Pack. pcs	Weight kg/100 pcs.	Item No.
MTGE2 15 2B	1	3.700	**7407595**

V2A Stainless steel, grade 304

Mounting support to accept two data connection modules of the following types BTR: E-DAT; Dätwyler: MS and MS-N; Kerpen: VarioKeystone.
Dimensions of a mounting opening in mm: 19.35/21.55 x 14.85.

Mounting support, 2 x type C







Type	Pack. pcs	Weight kg/100 pcs.	Item No.
MTGE2 15 2C	1	5.500	**7407596**

V2A Stainless steel, grade 304

Mounting support to accept two data connection modules of the following types: Brand-Rex: shielded; EKU: E-Stone; Dätwyler: KS-T, MS-K and KU-T module; R&M: Snap-In and Keystone; Rutenbeck: UM and UMflex; SETEC: MKJ, UKJ and XKJ; Siemon TERA; Telegärtner: AMJ and UMJ.
Dimensions of a mounting opening in mm: 19.30 x 14.80.

Mounting support, 2 x type F






Type	Pack. pcs	Weight kg/100 pcs.	Item No.
MTGE2 15 2F	1	5.700	**7407597**

V2A Stainless steel, grade 304

Mounting support to accept two data connection modules, type Avaya/Systimax: M series.
Dimensions of a mounting opening in mm: 17.40 x 16.60.

Mounting support, 1 x type K







Type	Pack. pcs	Weight kg/100 pcs.	Item No.
MTGE2 15 1K	1	5.500	**7407599**

V2A Stainless steel, grade 304

Mounting support to incorporate an audio or video technology connection socket, type XLR, Speakon type D.

Mounting support, 2 x type LE





Type	Pack. pcs	Weight kg/100 pcs.	Item No.
MTGE2 15 2LE	1	5.500	**7407598**

V2A Stainless steel, grade 304

Mounting support to accept two data connection modules of the following types: LexCom 125 and 250.
Dimensions of a mounting opening in mm: 18.30 x 17.20.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.

UDHOME2 floor socket, with tube body for wet-cleaned floors, freely equippable

Type	Dimension h mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDHOME2 VF	110	110 - 130	1	315.000	**7427095**

V2A Stainless steel, A2

Square floor socket for use in wet-care cavity and screed floors. Installation housing with pre-marked insertion openings for empty pipelines (M20/M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 110 mm, the height-adjustment range + 20 mm.
Up to two Modul45® sockets can be installed. Up to two modular data sockets (Keystones) can be installed with optional mounting supports.






UDHOME2 floor socket, with tube body for wet-cleaned floors, equipped

Type	Dimension h mm	Installation depth mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDHOME2 VF V	110	110	110 - 130	1	323.000	**7368410**

V2A Stainless steel, A2

Square floor socket for use in wet-care cavity and screed floors. Cable exit for height-adjustable tube body. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 110 mm, the height-adjustment range + 20 mm.

The scope of delivery contains a double protective contact socket. Up to two modular data sockets (Keystones) can be installed with optional mounting supports.






Height extension for UDHOME2 floor socket


Type	Height adjustment range mm	Pack. pcs	Weight kg/100 pcs.	Item No.
HE60 UDHOME2	10 - 60	1	73.400	**7368400**

St Steel

FS Strip-galvanised

Height-adjustable extension for UDHOME2 floor socket.






UDHOME2 floor socket, with tube body for wet-cleaned floors, equipped


Type	Dimension h mm	Installation depth mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDHOME2 VF N	110	110	110 - 130	1	323.000	**7368411**

V2A Stainless steel, A2

Square floor socket for use in wet-care cavity and screed floors. Cable exit for height-adjustable tube body. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 110 mm, the height-adjustment range + 20 mm.

The scope of delivery contains a double NF socket. Up to two modular data sockets (Keystones) can be installed with optional mounting supports.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Mounting support, 2 x type A






Type	Pack. pcs	Weight kg/100 pcs.	Item No.
MTGE2F 2A	1	0.380	**7407841**

V2A Stainless steel, grade 304

Mounting support to accept two data connection modules of the following types: AMP TYCO: Standard 110Connect, SL Series 110Connect and Toolless, AMP-Twist; Brand-Rex: unshielded; GG45; TKM RJ MOD; Nexans: LANmark with Adapter-Clip; Siemon CAT6; 3M K6 and K10.
Dimensions of a mounting opening in mm: 20.10 x 14.80.

Mounting support, 2 x type B






Type	Pack. pcs	Weight kg/100 pcs.	Item No.
MTGE2F 2B	1	0.260	**7407842**

V2A Stainless steel, grade 304

Mounting support to accept two data connection modules of the following types BTR: E-DAT; Dätwyler: MS and MS-N; Kerpen: VarioKeystone.
Dimensions of a mounting opening in mm: 19.35/21.55 x 14.85.

Mounting support, 2 x type C






Type	Pack. pcs	Weight kg/100 pcs.	Item No.
MTGE2F 2C	1	0.380	**7407843**

V2A Stainless steel, grade 304

Mounting support to accept two data connection modules of the following types: Brand-Rex: shielded; EKU: E-Stone; Dätwyler: KS-T, MS-K and KU-T module; R&M: Snap-In and Keystone; Rutenbeck: UM and UMflex; SETEC: MKJ, UKJ and XKJ; Siemon TERA; Telegärtner: AMJ and UMJ.
Dimensions of a mounting opening in mm: 19.30 x 14.80.

Mounting support, 2 x type F






Type	Pack. pcs	Weight kg/100 pcs.	Item No.
MTGE2F 2F	1	0.410	**7407853**

V2A Stainless steel, grade 304

Mounting support to accept two data connection modules, type Avaya/Systimax: M series.
Dimensions of a mounting opening in mm: 17.40 x 16.60.

Mounting support, 1 x type K






Type	Pack. pcs	Weight kg/100 pcs.	Item No.
MTGE2F 1K	1	0.400	**7407855**

V2A Stainless steel, grade 304

Mounting support to incorporate an audio or video technology connection socket, type XLR, Speakon type D.

Mounting support, 2 x type LE





Type	Pack. pcs	Weight kg/100 pcs.	Item No.
MTGE2F 2LE	1	0.370	**7407854**

V2A Stainless steel, grade 304

Mounting support to accept two data connection modules of the following types: LexCom 125 and 250.
Dimensions of a mounting opening in mm: 18.30 x 17.20.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Connection module Cat. 5, unshielded, snap-in

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ASM-C5 S	1	1.120	**6117347**

Connection module Cat. 5e unshielded, with a RJ45 slot. Including a dust cover, a cable tie, a snap-in fastening frame and mounting instructions. Suitable for installation in support plates, type MTM 2C and MTM 3C, mounting plate type MPR2 2C, mounting support type MTGE2 2C, MTGE2 15 2C and MTGE2 F 2C.






Connection module Cat. 5, shielded, snap-in

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ASM-C5 GS	1	1.920	**6117343**

Connection module Cat. 5e shielded, with a RJ45 slot. Including an EMC screen hood, a dust cover, a cable tie, a snap-in fastening frame and mounting instructions. Suitable for installation in support plates, type MTM 2C and MTM 3C, mounting plate type MPR2 2C, mounting support type MTGE2 2C, MTGE2 15 2C and MTGE2 F 2C.






Connection module Cat. 6, unshielded, snap-in

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ASM-C6 S	1	1.060	**6117349**

Connection module Cat. 6 unshielded, with a RJ45 slot. Including a dust cover, a cable tie, a snap-in fastening frame and mounting instructions. Suitable for installation in support plates, type MTM 2C and MTM 3C, mounting plate type MPR2 2C, mounting support type MTGE2 2C, MTGE2 15 2C and MTGE2 F 2C.






Connection module Cat. 6, shielded, snap-in

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ASM-C6 GS	1	1.850	**6117345**

Connection module Cat. 6 shielded, with a RJ45 slot. Including an EMC screen hood, a dust cover, a cable tie, a snap-in fastening frame and mounting instructions. Suitable for installation in support plates, type MTM 2C and MTM 3C, mounting plate type MPR2 2C, mounting support type MTGE2 2C, MTGE2 15 2C and MTGE2 F 2C.






Connection module Cat. 6A, unshielded, snap-in

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ASM-C6A	1	1.050	**6117348**

Connection module Cat. 6A (ISO) unshielded, with an RJ45 slot. Including a dust cover, a cable tie, a Keystone fastening frame and mounting instructions. Suitable for installation in the data technology supports of type DTG-2C and DTS-2C, support plate of type MTM 2C and MTM 3C, mounting plate of type MPR2 2C, mounting supports of type MTGE2 2C, MTGE2 15 2C and MTGE2 F 2C.






Connection module Cat. 6A, shielded, snap-in

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ASM-C6A G	1	1.630	**6117346**

Connection module Cat. 6A (ISO) shielded, with an RJ45 slot. Including an EMC screen hood, a dust cover, a cable tie, a Keystone fastening frame and mounting instructions. Suitable for installation in the data technology supports of type DTG-2C and DTS-2C, support plate of type MTM 2C and MTM 3C, mounting plate of type MPR2 2C, mounting supports of type MTGE2 2C, MTGE2 15 2C and MTGE2 F 2C.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

UDHOME4 floor box, with GB2 mounting box, equipped, stainless steel





Type	Dimension h mm	Floor height mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDHOME4 2V V	95	95 - 125	15	1	380.000	**7427200**

V2A Stainless steel, grade 304


Square floor box for use in dry-cleaned cavity and screed floors. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 95 mm, the height-adjustment range + 30 mm.

Surfaces visible in the floor covering made of stainless steel.

The scope of delivery contains two UT3 universal supports, a triple power socket with cover plate and two individual cover plates for accessories with support ring.

UDHOME4 floor box, with GB2 mounting box, equipped, brass





Type	Dimension h mm	Floor height mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDHOME4 2M V	95	95 - 125	15	1	388.000	**7427204**

CuZn Brass


Square floor box for use in dry-cleaned cavity and screed floors. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 95 mm, the height-adjustment range + 30 mm.

Surfaces visible in the floor covering made of brass.

The scope of delivery contains two UT3 universal supports, a triple power socket with cover plate and two individual cover plates for accessories with support ring.

UDHOME4 floor box, with MT3 module support, freely equippable, stainless steel





Type	Dimension h mm	Floor height mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDHOME4 2V MT U	95	95 - 125	15	1	402.700	**7427248**


V2A Stainless steel, grade 304


Square floor box for use in dry-cleaned cavity and screed floors. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 95 mm, the height-adjustment range + 30 mm.

Surfaces visible in the floor covering made of stainless steel.

The scope of supply contains two universal supports UT3 45 3 for installation of up to six Modul 45 devices.

UDHOME4 floor box, with MT3 module support, freely equippable, brass





Type	Dimension h mm	Floor height mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDHOME4 2M MT U	95	95 - 125	15	1	412.700	**7427252**

CuZn Brass

Square floor box for use in dry-cleaned cavity and screed floors. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 95 mm, the height-adjustment range + 30 mm.

Surfaces visible in the floor covering made of brass.

The scope of supply contains two universal supports UT3 45 3 for installation of up to six Modul 45 devices.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.


Height extension for UDHOME4 floor box

Type	Height adjustment range mm	Pack. pcs	Weight kg/100 pcs.	Item No.
HE60 UDHOME4	10 - 60	1	109.800	**7427440**

St Steel

FS Strip-galvanised

Height-adjustable expansion for floor box UDHOME4.







Floor box, UDHome4 service outlet, stainless steel, with mounting box, with LF socket

Type	Dimension h mm	Screed height mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDHOME4 2V N	95	95 - 110	95 - 125	1	414.000	**7427208**

V2A Stainless steel, grade 304

Square installation unit for use in dry-care cavity and screed floors. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to top edge of floor covering using four height adjustment supports. 15 mm floor covering recess in the hinged lid. The minimum installation depth is 95 mm, the height adjustment range + 30 mm.
The scope of delivery contains two GB2 mounting boxes, a triple NF socket with cover plate and two individual cover plates for accessories with support ring.
Surfaces visible in the floor covering made of: Stainless steel, material 1.4301.







Floor box, UDHome4, brass, with mounting box, with LF socket

Type	Dimension h mm	Screed height mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDHOME4 2M N	95	95 - 110	95 - 125	1	424.000	**7427212**

CuZn Brass

Square installation unit for use in dry-care cavity and screed floors. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to top edge of floor covering using four height adjustment supports. 15 mm floor covering recess in the hinged lid. The minimum installation depth is 95 mm, the height adjustment range + 30 mm.
The scope of delivery contains two GB2 mounting boxes, a triple NF socket with cover plate and two individual cover plates for accessories with support ring.
Surfaces visible in the floor covering made of: Brass.







Floor box, UDHome4 service outlet, stainless steel, with module support, with LF socket

Type	Dimension h mm	Screed height mm	Floor height mm	Material symbol	Pack. pcs	Weight kg/100 pcs.	Item No.
UDHOME4 2V MT N	95	95 - 110	95 - 125	V2A	1	413.000	**7427224**

V2A Stainless steel, grade 304


Square installation unit for use in dry-care cavity and screed floors. Installation housing with pre-marked insertion openings for pipes (M25). Cover adjustable to top edge of floor covering using four height adjustment supports. 15 mm floor covering recess in the hinged lid. The minimum installation depth is 95 mm, the height adjustment range + 30 mm.
The scope of delivery contains two module supports MT3/45/2-1 and one triple NF socket.
Surfaces visible in the floor covering made of: Stainless steel, material 1.4301.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Floor box, UDHome4, brass, with module support, with LF socket






Type	Dimension h mm	Screed height mm	Floor height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDHOME4 2M MT N	95	95 - 110	95 - 125	1	423.000	**7427228**

CuZn Brass

Square installation unit for use in dry-care cavity and screed floors. Installation housing with pre-marked insertion openings for pipes (M25). Cover adjustable to top edge of floor covering using four height adjustment supports. 15 mm floor covering recess in the hinged lid. The minimum installation depth is 95 mm, the height adjustment range + 30 mm.
The scope of delivery contains two module supports MT3/45/2-1 and one triple NF socket.
Surfaces visible in the floor covering made of: Brass.

UDHOME4 floor box, empty, stainless steel






Type	Dimension h mm	Floor height mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDHOME4 2V	95	95 - 125	15	1	384.000	**7427232**


V2A Stainless steel, grade 304

Square floor box for use in dry-cleaned cavity and screed floors. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 95 mm, the height-adjustment range + 30 mm.

Surfaces visible in the floor covering made of stainless steel.

UDHOME4 floor box, empty, brass





Type	Dimension h mm	Floor height mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDHOME4 2M	95	95 - 125	15	1	344.800	**7427236**


CuZn Brass

Square floor box for use in dry-cleaned cavity and screed floors. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 95 mm, the height-adjustment range + 30 mm.

Surfaces visible in the floor covering made of brass.

UDHOME4 floor box, with MT3 module support, freely equippable, stainless steel





Type	Dimension h mm	Floor height mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDHOME4 2V MT V	95	95 - 125	15	1	413.000	**7427216**
UDHOME4 2M MT V	95	95 - 125	15	1	423.000	**7427220**

V2A Stainless steel, grade 304 CuZn Brass

Square floor box for use in dry-cleaned cavity and screed floors. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 95 mm, the height-adjustment range + 30 mm.

Surfaces made of stainless steel and visible in the floor covering.


The scope of delivery contains two module supports MT3 45 2-1 and one triple protective contact socket. Up to three additional Modul45 devices can be installed.

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

UDHOME9 floor box, with GB3 mounting box, equipped, stainless steel

Type	Dimension h mm	Floor height mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDHOME9 2V GB V	95	95 - 125	15	1	520.500	**7427300**





V2A Stainless steel, grade 304


Square floor box for use in dry-cleaned cavity and screed floors. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 95 mm, the height-adjustment range + 30 mm.


Surfaces visible in the floor covering made of stainless steel.

The scope of supply contains three universal supports UT4 for installation of Modul 45 devices. One universal support is equipped with two double sockets in pure white. A further universal support is equipped with two cover plates for standard device installation and the third universal support is equipped with two blanking covers.

UDHOME9 floor box, with GB3 mounting box, equipped, brass

Type	Dimension h mm	Floor height mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDHOME9 2M GB V	95	95 - 125	15	1	573.000	**7427304**





CuZn Brass


Square floor box for use in dry-cleaned cavity and screed floors. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 95 mm, the height-adjustment range + 30 mm.

Surfaces visible in the floor covering made of brass.

The scope of supply contains three universal supports UT4 for installation of Modul 45 devices. One universal support is equipped with two double sockets in pure white. A further universal support is equipped with two cover plates for standard device installation and the third universal support is equipped with two blanking covers.

UDHOME9 floor box, with MT4 module support, equipped, stainless steel

Type	Dimension h mm	Floor height mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDHOME9 2V MT V	95	95 - 125	15	1	520.000	**7427308**





V2A Stainless steel, grade 304


Square floor box for use in dry-cleaned cavity and screed floors. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 95 mm, the height-adjustment range + 30 mm.

Surfaces visible in the floor covering made of stainless steel.

The scope of supply contains three universal supports UT4 45 4 for direct mounting of Modul 45 devices. Of these, one is equipped with two double protective contact sockets in pure white.

UDHOME9 floor box, with MT4 module support, equipped, brass

Type	Dimension h mm	Floor height mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDHOME9 2M MT V	95	95 - 125	15	1	532.000	**7427312**





CuZn Brass

Square floor box for use in dry-cleaned cavity and screed floors. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 95 mm, the height-adjustment range + 30 mm.


Surfaces visible in the floor covering made of: Brass.

The scope of supply contains three universal supports UT4 45 4 for direct mounting of Modul 45 devices. Of these, one is equipped with two double protective contact sockets in pure white.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Height extension for UDHOME9 floor box





Type	Height adjustment range mm	Pack. pcs	Weight kg/100 pcs.	Item No.
HE60 UDHOME9	10 - 60	1	145.700	**7427444**


St Steel

FS Strip-galvanised

Height-adjustable expansion for floor box UDHOME9.

Floor box, UDHome9 service outlet, stainless steel, with module support, with LF socket







Type	Dimension h mm	Screed height mm	Floor height mm	Material symbol	Pack. pcs	Weight kg/100 pcs.	Item No.
UDHOME9 2V MT N	95	95 - 110	95 - 125	V2A	1	520.000	**7427316**

V2A Stainless steel, grade 304

Square installation unit for use in dry-care cavity and screed floors. Installation housing with pre-marked insertion openings for pipes (M25). Cover adjustable to top edge of floor covering using four height adjustment supports. 15 mm floor covering recess in the hinged cover. The minimum installation depth is 95 mm, the height adjustment range +30 mm.
The scope of supply contains three module supports MT4/45/2-2 for direct mounting of module 45 devices. Of these, one is equipped with two double NF sockets in pure white.
Surfaces visible in the floor covering made of: Stainless steel, material 1.4301.

Floor box, UDHome9 service outlet, brass, with module support, with LF socket





Type	Dimension h mm	Screed height mm	Floor height mm	Material symbol	Pack. pcs	Weight kg/100 pcs.	Item No.
UDHOME9 2M MT N	95	95 - 110	95 - 125	CuZn	1	532.000	**7427320**


CuZn Brass

Square installation unit for use in dry-care cavity and screed floors. Installation housing with pre-marked insertion openings for pipes (M25). Cover adjustable to top edge of floor covering using four height adjustment supports. 15 mm floor covering recess in the hinged cover. The minimum installation depth is 95 mm, the height adjustment range + 30 mm.
The scope of supply contains three module supports MT4/45/2-2 for direct mounting of module 45 devices. Of these, one is equipped with two double NF sockets in pure white.
Surfaces visible in the floor covering made of: Brass.

Floor boxes

UDHOME9 floor box, empty, stainless steel





Type	Dimension h mm	Floor height mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDHOME9 2V	95	95 - 125	15	1	470.000	**7427324**

V2A Stainless steel, grade 304

Square floor box for use in dry-cleaned cavity and screed floors. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 95 mm, the height-adjustment range + 30 mm.

Surfaces visible in the floor covering made of stainless steel.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.

UDHOME9 floor box, empty, brass

Type	Dimension h mm	Floor height mm	Floor covering thickness mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UDHOME9 2M	95	95 - 125	15	1	482.000	**7427328**

CuZn Brass





Square floor box for use in dry-cleaned cavity and screed floors. Installation housing with pre-marked insertion openings for pipelines (M25). Cover adjustable to the top edge of the floor covering using four height-adjustment supports. The minimum installation depth is 95 mm, the height-adjustment range + 30 mm.

Surfaces visible in the floor covering made of brass.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.



GES R2 floor sockets

The round floor sockets of the GES R2 series supply data and power exactly where they are required. Their handling is simple: The connection lines are inserted in the compact installation space and that space is closed off with a lid. Depending on the lid version, the floor sockets are suitable for dry or wet-cleaned floors.



Gesamtkatalog_K1_LFS_EGS_UP_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (export_02579) / 2019/04/18

Always indicate the item number when ordering.

MODULAR

GES R2 floor sockets




ACKERMANN MADE BY OBO

IP 66



- Available with hinged cover, tube body or blanking lid with high-quality coating in copper, brass, chrome or nickel.
- Modular design for different application conditions.
- Installation room for 2 sockets and 2 data modules.
- IP66-certified when closed.

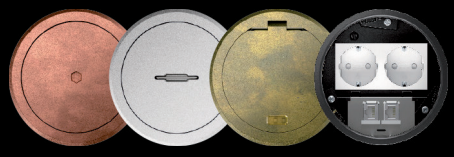


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019.04.18 / 21.04.2019 12:04 (LLExport_02579) / 2019.04.18

Always indicate the item number when ordering.

Screed box for GES R2





Type	Screed height mm	Installation diameter	Pack. pcs	Weight kg/100 pcs.	Item No.
UD GES R2	85 - 130	122	1	218.000	**7428526**


St Steel

FS Strip-galvanised

Height-adjustable screed box for the installation of the installation socket of the GES R2 floor socket.
With 2x2 insertion openings for installation pipes (M20/M25).

Installation socket, 1.5 empty





Type	Installation depth mm	Pack. pcs	Weight kg/100 pcs.	Item No.
MT R2 1.5	85	1	19.500	**7408836**


PA Polyamide

Installation socket for GES R2 floor socket for mounting in UD GES R2 screed socket and in raised floor plates with an installation opening diameter of 122 mm.

Included in the delivery is a cover plate for the installation of 1.5x Modul 45 sockets (BS, SA). Up to two modular data sockets (Keystones) can be installed with optional mounting plate.

Installation box, double, VDE





Type	Installation depth mm	Installation diameter	Pack. pcs	Weight kg/100 pcs.	Item No.
MT R2 VDE	85	122	1	26.800	**7408832**


PA Polyamide

Installation socket for GES R2 floor socket for mounting in UD GES R2 screed socket and in raised floor plates with an installation opening diameter of 122 mm.

The scope of delivery contains a double protective contact socket (VDE). Up to two modular data sockets (Keystones) can be installed with optional mounting plate.

Installation box, double, NF





Type	Installation depth mm	Installation diameter	Pack. pcs	Weight kg/100 pcs.	Item No.
MT R2 NF	85	122	1	21.000	**7408834**


PA Polyamide

Installation socket for GES R2 floor socket for mounting in UD GES R2 screed socket and in raised floor plates with an installation opening diameter of 122 mm.

The scope of delivery contains a double socket (NF). Up to two modular data sockets (Keystones) can be installed with optional mounting plate.

Installation socket, 1+1 empty





Type	Installation depth mm	Installation diameter	Pack. pcs	Weight kg/100 pcs.	Item No.
MT R2 1-1	85	122	1	19.800	**7408838**

PA Polyamide

Installation socket for GES R2 floor socket for mounting in UD GES R2 screed socket and in raised floor plates with an installation opening diameter of 122 mm.

The scope of supply contains a partition and two cover plates for the installation of individual Modul 45 devices. Up to two modular data sockets (Keystones) can be installed with optional mounting plate.

Always indicate the item number when ordering.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Mounting plate for data technology, type A

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
MP R2 2A	1	1.960	**7408802**

V2A Stainless steel, grade 304

Mounting plate to accept two data connection modules of the following types: AMP TYCO: Standard 110Connect, SL Series 110Connect and Toolless, AMP-Twist; Brand-Rex: unshielded; GG45; TKM RJ MOD; Nexans: LANmark with Adapter-Clip; Siemon CAT6; 3M K6 and K10.
Dimensions of a mounting opening in mm: 20.10 x 14.80.






Mounting plate for data technology, type B

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
MP R2 2B	1	1.940	**7408804**

V2A Stainless steel, grade 304

Mounting plate to accept two connection modules for data connection modules of the following types BTR: E-DAT; Dätwyler: MS and MS-N; Kerpen: VarioKeystone.
Dimensions of a mounting opening in mm: 19.35/21.55 x 14.85.






Mounting plate for data technology, type C

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
MP R2 2C	1	1.950	**7408806**

V2A Stainless steel, grade 304

Mounting plate to accept two data connection modules of the following types: Brand-Rex: shielded; EKU: E-Stone; Dätwyler: KS-T, MS-K and KU-T module; R&M: Snap-In and Keystone; Rutenbeck: UM and UMflex; SETEC: MKJ, UKJ and XKJ; Siemon TERA; Telegärtner: AMJ and UMJ.
Dimensions of a mounting opening in mm: 19.30 x 14.80.






Mounting plate for data technology, type F

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
MP R2 2F	1	2.190	**7408808**

V2A Stainless steel, grade 304

Mounting plate to accept two data connection modules, type Avaya/Systimax: M series.
Dimensions of a mounting opening in mm: 17.40 x 16.60.






Mounting plate for data technology, type LE

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
MP 2R LE	1	2.250	**7408810**

V2A Stainless steel, grade 304

Mounting support to accept two data connection modules of the following types: LexCom 125 and 250.
Dimensions of a mounting opening in mm: 18.30 x 17.20.






Accessories

Connection module Cat. 5, unshielded, snap-in

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ASM-C5 S	1	1.120	**6117347**

Connection module Cat. 5e unshielded, with a RJ45 slot. Including a dust cover, a cable tie, a snap-in fastening frame and mounting instructions. Suitable for installation in support plates, type MTM 2C and MTM 3C, mounting plate type MPR2 2C, mounting support type MTGE2 2C, MTGE2 15 2C and MTGE2 F 2C.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Connection module Cat. 5, shielded, snap-in






Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ASM-C5 GS	1	1.920	**6117343**

Connection module Cat. 5e shielded, with a RJ45 slot. Including an EMC screen hood, a dust cover, a cable tie, a snap-in fastening frame and mounting instructions. Suitable for installation in support plates, type MTM 2C and MTM 3C, mounting plate type MPR2 2C, mounting support type MTGE2 2C, MTGE2 15 2C and MTGE2 F 2C.

Connection module Cat. 6, unshielded, snap-in






Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ASM-C6 S	1	1.060	**6117349**

Connection module Cat. 6 unshielded, with a RJ45 slot. Including a dust cover, a cable tie, a snap-in fastening frame and mounting instructions. Suitable for installation in support plates, type MTM 2C and MTM 3C, mounting plate type MPR2 2C, mounting support type MTGE2 2C, MTGE2 15 2C and MTGE2 F 2C.

Connection module Cat. 6, shielded, snap-in






Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ASM-C6 GS	1	1.850	**6117345**

Connection module Cat. 6 shielded, with a RJ45 slot. Including an EMC screen hood, a dust cover, a cable tie, a snap-in fastening frame and mounting instructions. Suitable for installation in support plates, type MTM 2C and MTM 3C, mounting plate type MPR2 2C, mounting support type MTGE2 2C, MTGE2 15 2C and MTGE2 F 2C.

Connection module Cat. 6A, unshielded, snap-in






Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ASM-C6A	1	1.050	**6117348**

Connection module Cat. 6A (ISO) unshielded, with an RJ45 slot. Including a dust cover, a cable tie, a Keystone fastening frame and mounting instructions. Suitable for installation in the data technology supports of type DTG-2C and DTS-2C, support plate of type MTM 2C and MTM 3C, mounting plate of type MPR2 2C, mounting supports of type MTGE2 2C, MTGE2 15 2C and MTGE2 F 2C.

Connection module Cat. 6A, shielded, snap-in






Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ASM-C6A G	1	1.630	**6117346**

Connection module Cat. 6A (ISO) shielded, with an RJ45 slot. Including an EMC screen hood, a dust cover, a cable tie, a Keystone fastening frame and mounting instructions. Suitable for installation in the data technology supports of type DTG-2C and DTS-2C, support plate of type MTM 2C and MTM 3C, mounting plate of type MPR2 2C, mounting supports of type MTGE2 2C, MTGE2 15 2C and MTGE2 F 2C.

Metal hinged cover for GES R2 floor socket

Hinged lid with locking slider, nickel





Type	Pack. pcs	Weight kg/100 pcs.	Item No.
GES R2 Ni	1	58.500	**7408850**

Zn Die-cast zinc
N Nickel-plated

Hinged cover with locking slider for GES R2 floor socket for direct installation in the MT R2 installation socket.
When closed, the floor socket can be wet-cleaned.

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


Hinged lid with locking slider, old brass

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
GES R2 CuZn	1	58.500	**7408852**

Zn Die-cast zinc

CuZn Brass-coated

Hinged cover with locking slider for GES R2 floor socket for direct installation in the MT R2 installation socket.
When closed, the floor socket can be wet-cleaned.






Hinged lid with locking slider, old copper

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
GES R2 Cu	1	58.500	**7408854**

Zn Die-cast zinc

Cu Copper-plated

Hinged cover with locking slider for GES R2 floor socket for direct installation in the MT R2 installation socket.
When closed, the floor socket can be wet-cleaned.






Hinged lid with locking slider, chromium

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
GES R2 Cr	1	58.500	**7408856**

Zn Die-cast zinc

CR Chrome-plated

Hinged cover with locking slider for GES R2 floor socket for direct installation in the MT R2 installation socket.
When closed, the floor socket can be wet-cleaned.






Tube body with handle clamp

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
GES R2T Ni	1	114.100	**7408860**

Zn Die-cast zinc

N Nickel-plated

Tube body with handle clamp for GES R2 floor socket for direct installation in the MT R2 installation socket.
The tube body fulfils the requirements of EN 50085-2-2 for wet-cleaned floors, also when opened.






Tube body with handle clamp

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
GES R2T CuZn	1	114.100	**7408862**

Zn Die-cast zinc

CuZn Brass-coated

Tube body with handle clamp for GES R2 floor socket for direct installation in the MT R2 installation socket.
The tube body fulfils the requirements of EN 50085-2-2 for wet-cleaned floors, also when opened.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Tube body for floor socket GES R2

Tube body with handle clamp






Type	Pack. pcs	Weight kg/100 pcs.	Item No.
GES R2T Cu	1	114.100	**7408864**

Zn Die-cast zinc
Cu Copper-plated

Tube body with handle clamp for GES R2 floor socket for direct installation in the MT R2 installation socket.
The tube body fulfils the requirements of EN 50085-2-2 for wet-cleaned floors, also when opened.

Tube body with handle clamp






Type	Pack. pcs	Weight kg/100 pcs.	Item No.
GES R2T Cr	1	114.100	**7408866**


Zn Die-cast zinc
CR Chrome-plated

Tube body with handle clamp for GES R2 floor socket for direct installation in the MT R2 installation socket.
The tube body fulfils the requirements of EN 50085-2-2 for wet-cleaned floors, also when opened.

Blanking lid for floor socket GES R2

Service outlet, blank, with Allen slot






Type	Pack. pcs	Weight kg/100 pcs.	Item No.
GES R2B Ni	1	58.200	**7408870**

Zn Die-cast zinc
N Nickel-plated

Blanking lid with Allen screw with locking slider for GES R2 floor socket for direct installation in the MT R2 installation socket.
The lid version can be used as a cable outlet.
When closed, the floor socket can be wet-cleaned.

Service outlet, blank, with Allen slot






Type	Pack. pcs	Weight kg/100 pcs.	Item No.
GES R2B CuZn	1	58.200	**7408872**

Zn Die-cast zinc
CuZn Brass-coated

Blanking lid with Allen screw with locking slider for GES R2 floor socket for direct installation in the MT R2 installation socket.
The lid version can be used as a cable outlet.
When closed, the floor socket can be wet-cleaned.

Service outlet, blank, with Allen slot





Type	Pack. pcs	Weight kg/100 pcs.	Item No.
GES R2B Cu	1	58.200	**7408874**

Zn Die-cast zinc
Cu Copper-plated

Blanking lid with Allen screw with locking slider for GES R2 floor socket for direct installation in the MT R2 installation socket.
The lid version can be used as a cable outlet.
When closed, the floor socket can be wet-cleaned.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.


Service outlet, blank, with Allen slot


Type	Pack. pcs	Weight kg/100 pcs.	Item No.
GES R2B Cr	1	58.200	**7408876**

Zn Die-cast zinc

CR Chrome-plated

Blanking lid with Allen screw with locking slider for GES R2 floor socket for direct installation in the MT R2 installation socket.
The lid version can be used as a cable outlet.
When closed, the floor socket can be wet-cleaned.






Hinged cover with cord outlet

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GES R2 9011	Graphite black	1	8.800	**7405084**

PA Polyamide

Hinged cover with cord outlet for GES R2 floor socket for direct installation in the MT R2 installation socket.
For use in dry-cleaned floors.






Hinged cover with cord outlet

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GES R2 7011	Iron grey	1	8.800	**7405082**

PA Polyamide

Hinged cover with cord outlet for GES R2 floor socket for direct installation in the MT R2 installation socket.
For use in dry-cleaned floors.






Service outlet, blank, without floor covering recess

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GES R2B 7011	Iron grey	1	8.150	**7405086**

PA Polyamide

Blanking lid with cord outlet for GES R2 floor socket for direct installation in the MT R2 installation socket.
For use in dry-cleaned floors.






Service outlet, blank, without floor covering recess

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
GES R2B 9011	Graphite black	1	8.150	**7405088**

PA Polyamide

Blanking lid with cord outlet for GES R2 floor socket for direct installation in the MT R2 installation socket.
For use in dry-cleaned floors.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Mounting plate for data technology, type LJUC





Type	Pack. pcs	Weight kg/100 pcs.	Item No.
MP 2R LJUC	1	1.700	**7408812**

V2A Stainless steel, grade 304

Mounting plate for receiving a data connection module type LJU6C.
Dimensions of a mounting opening in mm: 36.2 x 22.0.



Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Modul 45® and Standard – installation solutions for underfloor systems

The Ackermann made by OBO installation systems offer a wide range of options for device installation in service outlets and cassettes with a locking ladder. Power, data and multimedia connections can be combined as required and positioned at various heights in the locking ladder.

Four solutions are available for device installation:

- Universal support UT3 and UT4 for the installation of Modul 45 devices and standard installation devices with 50 mm central plate
- MTU mounting support for the integration of data and multimedia technology of various manufacturers
- MT45V module support for vertical installation of Modul 45 devices
- GT device support for the installation of CEE connection units

Maximum equipment of Modul 45 devices per device installation unit

Nominal size	Universal support	Modul 45 devices
2	1x UT3	3
4 and R4	2x UT3	6
6	3x UT3	9
7	2x UT3 + 1x UT4	10
9 and R9	3x UT4	12

ACKERMANN MADE BY OBO




Universal support

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Thought-through

The UT3 & UT4 universal supports

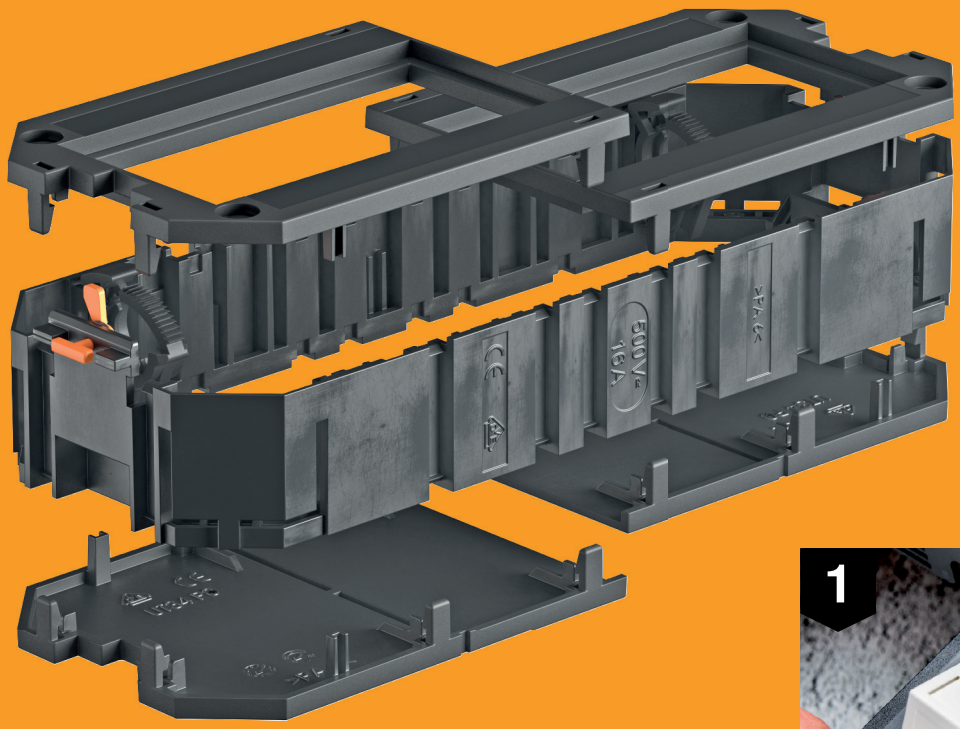


Mounting without tools

Removable floor plates

Support frame with innovative turn buckle



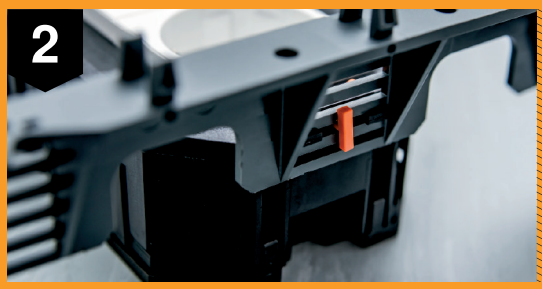




Installation in only a few steps – the universal support is fixed with the innovative turn buckle in the locking ladder of an installation device or a cassette.

The universal supports for underfloor systems from Ackermann made by OBO have a modular design and can be flexibly equipped. Both the compact OBO Modul45 in-stallation devices as well as standard installation devices with a 50 x 50 mm central plate fit perfectly. This means sockets, data technology and multimedia elements can be combined in the universal support in many different ways.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Universal support UT3, system length 165 mm





Type	Length mm	Width mm	Height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UT3	165	76	36	1	7.300	**7408721**


PA Polyamide

Universal support with two strain reliefs for electrical installation in device installation units of nominal sizes 2, R4, 4, 6 and R7.

Cover plates and accessories should be ordered separately.

Universal support UT3, system length 165 mm






Type	Length mm	Installation technology	Width mm	Height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UT3 45 3	165	Grid M45	76	40	1	10.600	**7408723**

PA Polyamide

Universal support with two strain reliefs, mounting bridge, partition and UT3 P3 cover plate for installation of 3 Modul 45 devices in device installation units of nominal sizes 2, R4, 4, 6 and R7.

Cover plate for universal support UT3, blank






Type	Length mm	Installation technology	Division in UT3	Pack. pcs	Weight kg/100 pcs.	Item No.
UT3 P0	82.5	Grid M45	1/2	10	1.600	**7408743**

PA Polyamide

Cover plate, blank, for closing off unused installation space of the UT3 universal support.
Plate can be reduced to 61 mm are required.

Cover plate for universal support UT3 and UT4, blank






Type	Length mm	Installation technology	Division in UT3	Division in UT4	Pack. pcs	Weight kg/100 pcs.	Item No.
UT34 P0	104	Grid M45	2/3	2/4	10	2.000	**7408745**

PA Polyamide

Cover plate, blank, for closing off unused installation space of the UT3 and UT4 universal support.
Plate can be reduced to 61 mm as required.

Cover plate for universal support UT3 and UT4, Modul 45® installation opening







Type	Length mm	Installation technology	Division in UT3	Division in UT4	Pack. pcs	Weight kg/100 pcs.	Item No.
UT34 P1	61	Grid M45	1/3	1/4	10	0.916	**7408771**

PA Polyamide

Cover plate for the installation of 1 Modul 45

Cover plate for universal support UT3, Modul 45® installation opening





Type	Length mm	Installation technology	Division in UT3	Pack. pcs	Weight kg/100 pcs.	Item No.
UT3 P1	82.5	Grid M45	1/2	10	1.400	**7408751**

PA Polyamide

Cover plate for the installation of 1 Modul 45

Always indicate the item number when ordering.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Cover plate for universal support UT3 and UT4, Modul 45® installation opening

Type	Length mm	Installation technology	Division in UT3	Division in UT4	Pack. pcs	Weight kg/100 pcs.	Item No.
UT34 P2	104	Grid M45	2/3	2/4	10	1.317	**7408773**

PA Polyamide

Cover plate for the installation of 2 Modul 45






Cover plate for universal support UT3, Modul 45® installation opening

Type	Length mm	Installation technology	Division in UT3	Pack. pcs	Weight kg/100 pcs.	Item No.
UT3 P3	165	Grid M45	1/1	10	2.300	**7408753**

PA Polyamide

Cover plate for the installation of 3 Modul 45

Mounting bridge UT34T for the installation of individual devices or socket combinations should be ordered separately.






Cover plate for universal support UT3, round installation opening for EKR device

Type	Length mm	Installation technology	Division in UT3	Pack. pcs	Weight kg/100 pcs.	Item No.
UT3 D1	82.5	50 mm central plate	1/2	10	1.183	**7408781**

PA Polyamide

Cover plate for the installation of 1 installation device with 50 mm central plate






Cover plate for universal support UT3 and UT4, with installation opening for EKR device, with screw fastening

Type	Length mm	Installation technology	Division in UT3	Division in UT4	Pack. pcs	Weight kg/100 pcs.	Item No.
UT34 D2	104	50 mm central plate	2/3	2/4	10	2.200	**7408785**

PA Polyamide

Cover plate for the installation of 1 installation device with 50 mm central plate






Universal support UT4, system length 208 mm

Type	Length mm	Width mm	Height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UT4	208	76	36	1	10.600	**7408725**

PA Polyamide

Universal support with two strain reliefs for electrical installation in device installation units of nominal sizes R7, R9 and 9.

Cover plates and accessories should be ordered separately.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Universal support UT4, system length 208 mm






Type	Length mm	Width mm	Height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UT4 45 4	208	76	40	1	13.500	**7408727**

PA Polyamide

Universal support with two strain reliefs, mounting bridges, partition and UT4 P4 cover plate for installation of 4 Modul 45 devices in device installation units of nominal sizes R7, R9 and 9.

Cover plate for universal support UT3 and UT4, blank






Type	Length mm	Installation technology	Division in UT3	Division in UT4	Pack. pcs	Weight kg/100 pcs.	Item No.
UT34 P0	104	Grid M45	2/3	2/4	10	2.000	**7408745**

PA Polyamide

Cover plate, blank, for closing off unused installation space of the UT3 and UT4 universal support. Plate can be reduced to 61 mm as required.

Cover plate for universal support UT3 and UT4, Modul 45® installation opening






Type	Length mm	Installation technology	Division in UT3	Division in UT4	Pack. pcs	Weight kg/100 pcs.	Item No.
UT34 P1	61	Grid M45	1/3	1/4	10	0.916	**7408771**

PA Polyamide

Cover plate for the installation of 1 Modul 45

Cover plate for universal support UT3 and UT4, Modul 45® installation opening






Type	Length mm	Installation technology	Division in UT3	Division in UT4	Pack. pcs	Weight kg/100 pcs.	Item No.
UT34 P2	104	Grid M45	2/3	2/4	10	1.317	**7408773**

PA Polyamide

Cover plate for the installation of 2 Modul 45

Cover plate for universal support UT4, Modul 45® installation opening





Type	Length mm	Installation technology	Division in UT4	Pack. pcs	Weight kg/100 pcs.	Item No.
UT4 P3	147	Grid M45	3/4	10	1.800	**7408761**


PA Polyamide

Cover plate for the installation of 3 Modul 45

Mounting bridge UT34T for the installation of individual devices or socket combinations should be ordered separately.

Cover plate for universal support UT4, Modul 45® installation opening





Type	Length mm	Installation technology	Division in UT4	Pack. pcs	Weight kg/100 pcs.	Item No.
UT4 P4	208	Grid M45	1/1	10	3.100	**7408763**

PA Polyamide

Cover plate for the installation of 4 Modul 45

Mounting bridge UT34T for the installation of individual devices or socket combinations should be ordered separately.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.

Cover plate for universal support UT4, round installation opening for EKR device

Type	Length mm	Installation technology	Division in UT3	Division in UT4	Pack. pcs	Weight kg/100 pcs.	Item No.
UT34 D1	104	50 mm central plate	2/3	2/4	10	1.700	**7408783**

PA Polyamide

Cover plate for the installation of 1 installation device with 50 mm central plate






Cover plate for universal support UT3 and UT4, with installation opening for EKR device, with screw fastening

Type	Length mm	Installation technology	Division in UT3	Division in UT4	Pack. pcs	Weight kg/100 pcs.	Item No.
UT34 D2	104	50 mm central plate	2/3	2/4	10	2.200	**7408785**

PA Polyamide

Cover plate for the installation of 1 installation device with 50 mm central plate






Cover plate for universal support UT4, with installation openings for 3 EK devices

Type	Length mm	Installation technology	Division in UT4	Pack. pcs	Weight kg/100 pcs.	Item No.
UT4 D3	208	50 mm central plate	1/1	10	2.900	**7408789**

PA Polyamide

Cover plate for the installation of 3 installation devices with 50 mm central plate






Partition

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
UT34 TW	10	0.500	**7408796**

PA Polyamide

Partition for universal support to separate current types and circuits.






Mounting bridge

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
UT34 T	10	0.100	**7408794**

PA Polyamide

Mounting bridge for installation between Modul45 devices in triple and 4x cover plates.






Strain relief

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ZE2 3	10	1.400	**7408650**

PA Polyamide

Strain relief for use in universal support cover plates, in mounting boxes, module supports and T4L and T8NL Telitanks, for standard strain relief of inserted cables.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Strain relief for data technology





Type	Pack. pcs	Weight kg/100 pcs.	Item No.
UT ZE	1	2.500	**7407851**


St Steel

FS Strip-galvanised

For mounting on UT3 and UT4 universal supports when using Modul 45 data technology as strain relief of data connection cables

Blanking cover for Modul 45® installation opening







Type	Pack. pcs	Weight kg/100 pcs.	Item No.
LP 45	10	0.500	**7407584**

PA Polyamide

Blanking cover for closing off a square Modul 45 mounting opening in a mounting box cover plate.

Blanking cover for round installation opening






Type	Pack. pcs	Weight kg/100 pcs.	Item No.
LP R	10	0.510	**7407580**

PA Polyamide

Blanking cover for closing off a square mounting opening of Ø 45 mm in a mounting box cover plate.

Blanking cover for service outlets and cassettes






Type	Length mm	Pack. pcs	Weight kg/100 pcs.	Item No.
LPA GB2	165	1	2.550	**7407588**
LPA GB3	208	1	3.950	**7407592**

PVC Polyvinylchloride

To close an unused installation slot for a universal support in a service outlet or a cassette.

Installation frame for four single Modul 45® devices






Type	Material symbol	Pack. pcs	Weight kg/100 pcs.	Item No.
MT45V 4	PC/ABS	5	1.200	**7408670**

PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene

For the installation of 4 individual Modul 45 devices for System 55 service outlet with mounting support for vertical installation of Modul 45 devices.
The installation frame is designed for use with 0° sockets (normal installation position, contact openings on right and left) and their use in conjunction with straight connectors (not angled connectors).

Installation frame for combination of 2x and 2x Modul 45® devices





Type	Material symbol	Pack. pcs	Weight kg/100 pcs.	Item No.
MT45V 2+2	PC/ABS	5	0.900	**7408682**


PC/ABS Polycarbonate/Acrylnitrile-butadiene-styrene


For the installation of a combination of 2x and 2x Modul 45 socket for System 55 service outlet with mounting support for vertical installation of Modul 45 devices.
The installation frame is designed for use with 0° sockets for straight connectors (not angled connectors).

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Socket 0°, protective contact, single



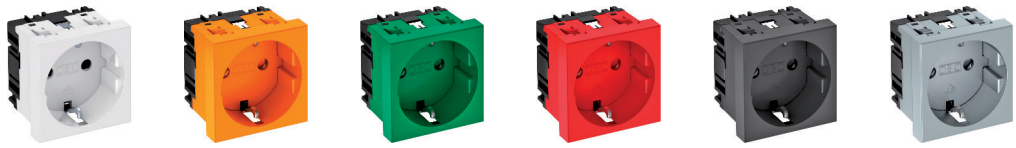


Type	STD-D0 RW1	STD-D0 ROR1	STD-D0 MZGN1	STD-D0 SRO1	STD-D0 SWGR1	STD-D0 AL1
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	4.200	4.200	4.200	4.200	4.200	4.200
Item No.	**6120008**	**6120010**	**6120012**	**6120014**	**6120016**	**6120018**

PC Polycarbonate

Protective contact socket single 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

Socket 0°, protective contact, double






Type	STD-D0 RW2	STD-D0 ROR2	STD-D0 MZGN2	STD-D0 SRO2	STD-D0 SWGR2	STD-D0 AL2
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	8.000	8.000	8.000	8.000	8.000	8.000
Item No.	**6120022**	**6120024**	**6120026**	**6120028**	**6120030**	**6120032**

PC Polycarbonate

Protective contact socket double 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

Socket 0°, protective contact, triple





Type	STD-D0 RW3	STD-D0 ROR3	STD-D0 MZGN3	STD-D0 SRO3	STD-D0 SWGR3	STD-D0 AL3
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	12.200	12.200	12.200	12.200	12.200	12.200
Item No.	**6120042**	**6120044**	**6120046**	**6120048**	**6120050**	**6120052**

PC Polycarbonate


Protective contact socket triple 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

Socket 0°, protective contact, encoded version, single

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D0K SRO1	Signal red	1	4.200	**6120292**

PC Polycarbonate

Power socket single 0°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.
The socket can only be used in conjunction with an encoding pin, type CST-STD.
Note: The encoding pin is not contained in the scope of supply.






Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Socket 0°, protective contact, encoded version, double






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D0K SRO2	Signal red	1	8.000	6120294

PC Polycarbonate

Power socket double 0°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.
The socket can only be used in conjunction with an encoding pin, type CST-STD.
Note: The encoding pin is not contained in the scope of supply.

Socket 0°, protective contact, encoded version, triple







Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D0K SRO3	Signal red	1	12.200	6120296

PC Polycarbonate

Power socket triple 0°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.
The socket can only be used in conjunction with an encoding pin, type CST-STD.
Note: The encoding pin is not contained in the scope of supply.

Socket 33°, protective contact, single



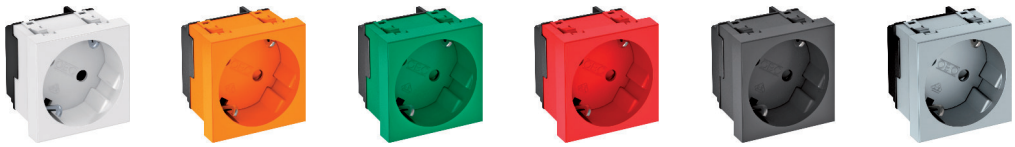



Type	STD-D3 RW1	STD-D3 ROR1	STD-D3 MZGN1	STD-D3 SRO1	STD-D3 SWGR1	STD-D3 AL1
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	4.000	4.000	4.000	4.000	4.000	4.000
Item No.	6120072	6120074	6120076	6120078	6120080	6120082

PC Polycarbonate

Protective contact socket single 33°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

Socket 33°, protective contact, double





Type	STD-D3 RW2	STD-D3 ROR2	STD-D3 MZGN2	STD-D3 SRO2	STD-D3 SWGR2	STD-D3 AL2
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	7.800	7.800	7.800	7.800	7.800	7.800
Item No.	6120102	6120104	6120106	6120108	6120110	6120112


PC Polycarbonate

Protective contact socket double 33°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Socket 33°, protective contact, triple





Type	STD-D3 RW3	STD-D3 ROR3	STD-D3 MZGN3	STD-D3 SRO3	STD-D3 SWGR3	STD-D3 AL3
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	11.000	11.000	11.000	11.000	11.000	11.000
Item No.	**6120122**	**6120124**	**6120126**	**6120128**	**6120130**	**6120132**

PC Polycarbonate


Protective contact socket triple 33°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.


Socket 33°, protective contact, encoded version, single

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D3K SRO1	Signal red	1	4.000	**6120302**

PC Polycarbonate

Power socket single 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.
The socket can only be used in conjunction with an encoding pin, type CST-STD.
Note: The encoding pin is not contained in the scope of supply.









Socket 33°, protective contact, encoded version, double

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D3K SRO2	Signal red	1	7.700	**6120304**

PC Polycarbonate

Power socket double 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.
The socket can only be used in conjunction with an encoding pin, type CST-STD.
Note: The encoding pin is not contained in the scope of supply.









Socket 33°, protective contact, encoded version, triple

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D3K SRO3	Signal red	1	11.000	**6120306**

PC Polycarbonate

Power socket triple 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.
The socket can only be used in conjunction with an encoding pin, type CST-STD.
Note: The encoding pin is not contained in the scope of supply.









Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Socket 0°, with earthing pin, single







Type	STD-F0 RW1	STD-F0 ROR1	STD-F0 MZGN1	STD-F0 SRO1	STD-F0 SWGR1	STD-F0 AL1
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	4.000	4.000	4.000	4.000	4.000	4.000
Item No.	**6120152**	**6120154**	**6120155**	**6120158**	**6120160**	**6120162**

PC Polycarbonate

Socket with earthing pin single 0°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V ~, with connection terminals to IEC 60884-1.

Socket 0°, with earthing pin, double






Type	STD-F0 RW2	STD-F0 ROR2	STD-F0 MZGN2	STD-F0 SRO2	STD-F0 SWGR2	STD-F0 AL2
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	7.700	7.700	7.700	7.700	7.700	7.700
Item No.	**6120172**	**6120174**	**6120176**	**6120178**	**6120180**	**6120182**

PC Polycarbonate

Socket with earthing pin double 0°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V ~, with connection terminals to IEC 60884-1.

Socket 0°, with earthing pin, triple






Type	STD-F0 RW3	STD-F0 ROR3	STD-F0 MZGN3	STD-F0 SRO3	STD-F0 SWGR3	STD-F0 AL3
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	11.800	11.800	11.800	11.800	11.800	11.800
Item No.	**6120192**	**6120194**	**6120196**	**6120198**	**6120200**	**6120201**

PC Polycarbonate

Socket with earthing pin triple 0°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V ~, with connection terminals to IEC 60884-1.

Socket 0°, with earthing pin, encoded version, single





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F0K SRO1	Signal red	1	4.000	6120312

PC Polycarbonate

Socket with earthing pin single 0°, encoded version, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1. The socket can only be used in conjunction with an encoding pin, type CST-STD.

Note: The encoding pin is not contained in the scope of supply.

Always indicate the item number when ordering.


Modul 45® and standard installation solutions for underfloor systems


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Socket 0°, with earthing pin, encoded version, double

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F0K SRO2	Signal red	1	7.800	6120314

PC Polycarbonate








Socket with earthing pin double 0°, encoded version, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1. The socket can only be used in conjunction with an encoding pin, type CST-STD.


Note: The encoding pin is not contained in the scope of supply.

Socket 0°, with earthing pin, encoded version, triple

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F0K SRO3	Signal red	1	11.800	6120316

PC Polycarbonate









Socket with earthing pin triple 0°, encoded version, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1. The socket can only be used in conjunction with an encoding pin, type CST-STD.

Note: The encoding pin is not contained in the scope of supply.

Socket 33°, with earthing pin, single



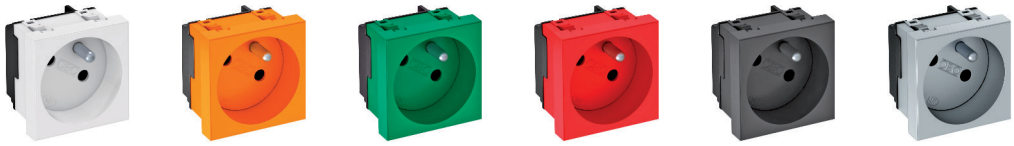


Type	STD-F3 RW1	STD-F3 ROR1	STD-F3 MZGN1	STD-F3 SRO1	STD-F3 SWGR1	STD-F3 AL1
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	3.800	3.800	3.800	3.800	3.800	3.800
Item No.	**6120222**	**6120224**	**6120226**	**6120228**	**6120230**	**6120232**

PC Polycarbonate

Socket with earthing pin single 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V ~, with connection terminals to IEC 60884-1.

Socket 33°, with earthing pin, double






Type	STD-F3 RW2	STD-F3 ROR2	STD-F3 MZGN2	STD-F3 SRO2	STD-F3 SWGR2	STD-F3 AL2
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	7.500	7.500	7.500	7.500	7.500	7.500
Item No.	**6120242**	**6120244**	**6120246**	**6120248**	**6120250**	**6120252**

PC Polycarbonate

Socket with earthing pin double 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V ~, with connection terminals to IEC 60884-1.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Socket 33°, with earthing pin, triple






Type	STD-F3 RW3	STD-F3 ROR3	STD-F3 MZGN3	STD-F3 SRO3	STD-F3 SWGR3	STD-F3 AL3
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	10.500	10.500	10.500	10.500	10.500	10.500
Item No.	**6120262**	**6120264**	**6120266**	**6120268**	**6120270**	**6120272**

PC Polycarbonate

Socket with earthing pin triple 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V ~, with connection terminals to IEC 60884-1.

Socket 33°, with earthing pin, encoded version, single





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F3K SRO1	Signal red	1	3.800	6120322


PC Polycarbonate

Socket with earthing pin single 33°, encoded version, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1. The socket can only be used in conjunction with an encoding pin, type CST-STD.

Note: The encoding pin is not contained in the scope of supply.

Socket 33°, with earthing pin, encoded version, double






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F3K SRO2	Signal red	1	7.500	6120324


PC Polycarbonate

Socket with earthing pin double 33°, encoded version, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1. The socket can only be used in conjunction with an encoding pin, type CST-STD.

Note: The encoding pin is not contained in the scope of supply.

Socket 33°, with earthing pin, encoded version, triple





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-F3K SRO3	Signal red	1	10.500	6120326


PC Polycarbonate

Socket with earthing pin triple 33°, encoded version, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1. The socket can only be used in conjunction with an encoding pin, type CST-STD.

Note: The encoding pin is not contained in the scope of supply.

USB charging device





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-2UC2.1 RW1	Pure white	1	5.500	6105300
MTG-2UC2.1 SWGR1	Black-grey	1	5.500	6105302
MTG-2UC2.1 AL1	Aluminium painted	1	5.500	6105304

PC Polycarbonate

USB charging device with two USB type A sockets, for charging 1–2 mobile devices, maximum charging current 1 x 2,100 mA or 2 x 1,050 mA.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.

Data technology support, 1 module, straight outlet, type RM

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTG-2RM RW1	Pure white	1	1.100	6119292
DTG-2RM SWGR1	Black-grey	1	1.100	6119294
DTG-2RM AL1	Aluminium painted	1	1.100	6119296

PC Polycarbonate

The type RM data technology support is suitable for accepting the following data connection modules: Types ASM-C5, ASM-C5 G, ASM-C6 and ASM-C6 G; R&M: Cat.5 and Cat.6 modules without support plate.






Data technology support, 1 module, slanting outlet, type RM

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTS-2RM RW1	Pure white	1	2.900	6119298
DTS-2RM SWGR1	Black-grey	1	2.900	6119300
DTS-2RM AL1	Aluminium painted	1	2.900	6119302

PC Polycarbonate

The type RM data technology support is suitable for accepting the following data connection modules: Types ASM-C5, ASM-C5 G, ASM-C6 and ASM-C6 G; R&M: Cat.5 and Cat.6 modules without support plate.






RJ45 data connection module, Cat. 5e, unshielded

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ASM-C5	1	1.120	6117337

Connection module Cat. 5e unshielded, with a RJ 45 slot. Including a dust cover, a cable tie and mounting instructions. Suitable for installation in data technology supports of type DTG-2RM and DTS-2RM.






RJ45 data connection module, Cat. 5e, shielded

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ASM-C5 G	1	2.660	6117325

Connection module Cat. 5e shielded, with a RJ 45 slot. Includes an EMC screen hood, a dust cover, a cable tie and mounting instructions. Suitable for installation in data technology supports of type DTG-2RM and DTS-2RM.






RJ45 data connection module, Cat. 6, unshielded

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ASM-C6	1	1.060	6117341

Connection module Cat. 6 unshielded, with a RJ 45 slot. Including a dust cover, a cable tie and mounting instructions. Suitable for installation in data technology supports of type DTG-2RM and DTS-2RM.






RJ45 data connection module, Cat. 6, shielded

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ASM-C6 G	1	1.850	6117329

Connection module Cat. 6 shielded, with a RJ 45 slot. Includes an EMC screen hood, a dust cover, a cable tie and mounting instructions. Suitable for installation in data technology supports of type DTG-2RM and DTS-2RM.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Data technology support, 1 module, straight outlet, type C






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTG-2C RW1	Pure white	1	1.100	**6119214**
DTG-2C SWGR1	Black-grey	1	1.100	**6119216**
DTG-2C AL1	Aluminium painted	1	1.100	**6119218**

PC Polycarbonate

The type C data technology support is suitable for accepting the following data connection modules: BTR (Keystone design): Cat. 6A module and UAE module; Corning: modules with Keystone seat; CobiNet: CobiDat KS module; Dätwyler: KS-T, KS-TS, MS-K and KU-T; EKU: E-Stone; Harting: Prelink Keystone Cat. 6A; Fixlink Keystone Cat. 6A; Komos: KDM 500 module; Leoni Kerpen: MegaLine-Connect45 Keystone socket modules; OBO: Type ASM-C6A and ASM-C6A G; R&M: Cat. 6A with Keystone fastening; Rutenbeck: UM and UMflex; SETEC: UKJ and XKJ; Telegärtner: AMJ and UMJ.

Data technology support, 1 module, slanting outlet, type C



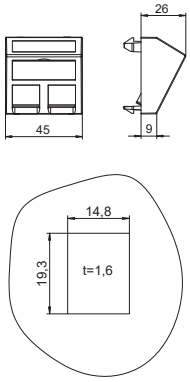


Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTS-2C RW1	Pure white	1	1.500	**6119250**
DTS-2C SWGR1	Black-grey	1	1.500	**6119252**
DTS-2C AL1	Aluminium painted	1	1.500	**6119254**

PC Polycarbonate

The type C data technology support is suitable for accepting the following data connection modules: BTR (Keystone design): Cat. 6A module and UAE module; Corning: modules with Keystone seat; CobiNet: CobiDat KS module; Dätwyler: KS-T, KS-TS, MS-K and KU-T; EKU: E-Stone; Harting: Prelink Keystone Cat. 6A; Fixlink Keystone Cat. 6A; Komos: KDM 500 module; Leoni Kerpen: MegaLine-Connect45 Keystone socket modules; OBO: Type ASM-C6A and ASM-C6A G; R&M: Cat. 6A with Keystone fastening; Rutenbeck: UM and UMflex; SETEC: UKJ and XKJ; Telegärtner: AMJ and UMJ.

Connection module Cat. 6A, unshielded, snap-in






Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ASM-C6A	1	1.050	**6117348**

Connection module Cat. 6A (ISO) unshielded, with an RJ45 slot. Including a dust cover, a cable tie, a Keystone fastening frame and mounting instructions. Suitable for installation in the data technology supports of type DTG-2C and DTS-2C, support plate of type MTM 2C and MTM 3C, mounting plate of type MPR2 2C, mounting supports of type MTGE2 2C, MTGE2 15 2C and MTGE2 F 2C.

Connection module Cat. 6A, shielded, snap-in





Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ASM-C6A G	1	1.630	**6117346**

Connection module Cat. 6A (ISO) shielded, with an RJ45 slot. Including an EMC screen hood, a dust cover, a cable tie, a Keystone fastening frame and mounting instructions. Suitable for installation in the data technology supports of type DTG-2C and DTS-2C, support plate of type MTM 2C and MTM 3C, mounting plate of type MPR2 2C, mounting supports of type MTGE2 2C, MTGE2 15 2C and MTGE2 F 2C.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.


Data technology support, 1 module, straight outlet, type A

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTG-2A RW1	Pure white	1	1.100	**6119202**
DTG-2A SWGR1	Black-grey	1	1.100	**6119204**
DTG-2A AL1	Aluminium painted	1	1.100	**6119206**

PC Polycarbonate

Data technology support with straight outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type A has a mounting opening of 20.10 x 14.80 mm and is designed for direct fastening of the data connection modules in the mounting opening.

The Type A data technology support is suitable for accepting the following data connection modules: AMP TYCO (without dust protection cap): SL Series 110Connect and SL Series Toolless; Brand-Rex: modules with item numbers ending in …JAKS000CR and …JAKU002; Nexans: LANmark RJ45 with blue adapter clip, LANmark GG45 with metal clip.






Data technology support, 1 module, slanting outlet, type A

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTS-2A RW1	Pure white	1	2.000	**6119238**
DTS-2A SWGR1	Black-grey	1	1.500	**6119240**
DTS-2A AL1	Aluminium painted	1	1.500	**6119242**

PC Polycarbonate

Data technology support with slanting outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type A has a mounting opening of 20.10 x 14.80 mm and is designed for direct fastening of the data connection modules in the mounting opening.

The Type A data technology support is suitable for accepting the following data connection modules: AMP TYCO (without dust protection cap): SL Series 110Connect and SL Series Toolless; Brand-Rex: modules with item numbers ending in …JAKS000CR and …JAKU002; Nexans: LANmark RJ45 with blue adapter clip, LANmark GG45 with metal clip.

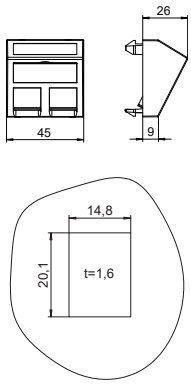




Data technology support, 1 module, straight outlet, type B

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTG-2B RW1	Pure white	1	1.100	**6119208**
DTG-2B SWGR1	Black-grey	1	1.100	**6119210**
DTG-2B AL1	Aluminium painted	1	1.100	**6119212**

PC Polycarbonate

Data technology support with straight outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type B has a mounting opening of 19.35/21.55 x 14.85 mm and is designed for direct fastening of the data connection modules in the mounting opening.

The type B data technology support is suitable for accepting the following data connection modules: BTR (module design): Cat. 6A Modul, E-DAT module and UAE module; Dätwyler: MS and MS-N, Leoni Kerpen: VarioKeystone socket module Cat. 6A and MegaLine-Connect100 socket module Cat. 6A and 8C7A.

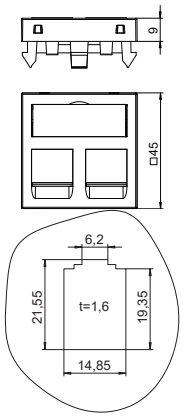




Data technology support, 1 module, slanting outlet, type B

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTS-2B RW1	Pure white	1	1.500	**6119244**
DTS-2B SWGR1	Black-grey	1	1.500	**6119246**
DTS-2B AL1	Aluminium painted	1	1.500	**6119248**

PC Polycarbonate

Data technology support with slanting outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type B has a mounting opening of 19.35/21.55 x 14.85 mm and is designed for direct fastening of the data connection modules in the mounting opening.

The type B data technology support is suitable for accepting the following data connection modules: BTR (module design): Cat. 6A Modul, E-DAT module and UAE module; Dätwyler: MS and MS-N, Leoni Kerpen: VarioKeystone socket module Cat. 6A and MegaLine-Connect100 socket module Cat. 6A and 8C7A.

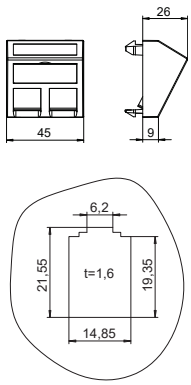




Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Data technology support, 1 module, straight outlet, type C





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTG-2C RW1	Pure white	1	1.100	**6119214**
DTG-2C SWGR1	Black-grey	1	1.100	**6119216**
DTG-2C AL1	Aluminium painted	1	1.100	**6119218**


PC Polycarbonate

Data technology support with straight outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type C has a mounting opening of 19.30 x 14.80 mm and is designed for direct fastening of the data connection modules in the mounting opening.

The type C data technology support is suitable for accepting the following data connection modules: BTR (Keystone design): Cat. 6A module and UAE module; Corning: modules with Keystone seat; CobiNet: CobiDat KS module; Dätwyler: KS-T, KS-TS, MS-K and KU-T; EKU: E-Stone; Harting: Prelink Keystone Cat. 6A; Fixlink Keystone Cat. 6A; Komos: KDM 500 module; Leoni Kerpen: MegaLine-Connect45 Keystone socket modules; OBO: Type ASM-C6A and ASM-C6A G; R&M: Cat. 6A with Keystone fastening; Rutenbeck: UM and UMflex; SETEC: UKJ and XKJ; Telegärtner: AMJ and UMJ.

Data technology support, 1 module, slanting outlet, type C



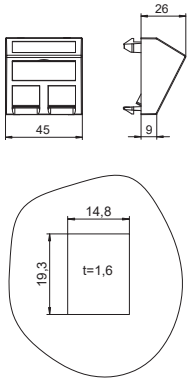

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTS-2C RW1	Pure white	1	1.500	**6119250**
DTS-2C SWGR1	Black-grey	1	1.500	**6119252**
DTS-2C AL1	Aluminium painted	1	1.500	**6119254**


PC Polycarbonate

Data technology support with slanting outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type C has a mounting opening of 19.30 x 14.80 mm and is designed for direct fastening of the data connection modules in the mounting opening.

The type C data technology support is suitable for accepting the following data connection modules: BTR (Keystone design): Cat. 6A module and UAE module; Corning: modules with Keystone seat; CobiNet: CobiDat KS module; Dätwyler: KS-T, KS-TS, MS-K and KU-T; EKU: E-Stone; Harting: Prelink Keystone Cat. 6A; Fixlink Keystone Cat. 6A; Komos: KDM 500 module; Leoni Kerpen: MegaLine-Connect45 Keystone socket modules; OBO: Type ASM-C6A and ASM-C6A G; R&M: Cat. 6A with Keystone fastening; Rutenbeck: UM and UMflex; SETEC: UKJ and XKJ; Telegärtner: AMJ and UMJ.

Data technology support, 1 module, straight outlet, type C, without dust protection slider



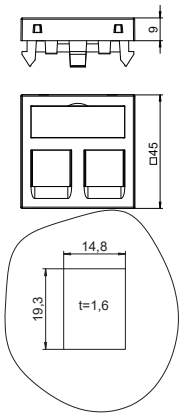

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTG-02C RW1	Pure white	1	1.000	**6119280**
DTG-02C SWGR1	Black-grey	1	1.000	**6119282**
DTG-02C AL1	Aluminium painted	1	1.000	**6119284**

PC Polycarbonate

Data technology support with straight outlet and without a locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type C has a mounting opening of 19.30 x 14.80 mm and is designed for direct fastening of the data connection modules in the mounting opening.

The type C data technology support (without dust protection slider) is suitable for accepting the following data connection modules: 3M: Volition K6, K10 and Cat. 6A.

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18


Data technology support, 1 module, slanting outlet, type C, without dust protection slider

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTS-02C RW1	Pure white	1	1.400	**6119286**
DTS-02C SWGR1	Black-grey	1	1.400	**6119288**
DTS-02C AL1	Aluminium painted	1	1.400	**6119290**

PC Polycarbonate

Data technology support with slanting outlet and without a locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type C has a mounting opening of 19.30 x 14.80 mm and is designed for direct fastening of the data connection modules in the mounting opening.

The type C data technology support (without dust protection slider) is suitable for accepting the following data connection modules: 3M: Volition K6, K10 and Cat. 6A.






Data technology support, 1 module, straight outlet, type EP

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTG-2EP RW1	Pure white	1	1.100	**6119232**
DTG-2EP SWGR1	Black-grey	1	1.100	**6119234**
DTG-2EP AL1	Aluminium painted	1	1.100	**6119236**

PC Polycarbonate

Data technology support with straight outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type EP has a special module seat and is designed for indirect fastening of the data connection modules in the mounting opening.

The type EP data technology support is suitable for accepting the following data connection modules: Leoni Kerpen: MegaLine-Connect45 ELine.






Data technology support, 1 module, slanting outlet, type EP

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTS-2EP RW1	Pure white	1	1.500	**6119268**
DTS-2EP SWGR1	Black-grey	1	1.500	**6119270**
DTS-2EP AL1	Aluminium painted	1	1.500	**6119272**

PC Polycarbonate

Data technology support with slanting outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type EP has a special module seat and is designed for indirect fastening of the data connection modules in the mounting opening.

The type EP data technology support is suitable for accepting the following data connection modules: Leoni Kerpen: The type EP data technology support is suitable for accepting the following data connection modules: Leoni Kerpen: MegaLine-Connect45 ELine.






Data technology support, 1 module, straight outlet, type F

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTG-2F RW1	Pure white	1	1.100	**6119220**
DTG-2F SWGR1	Black-grey	1	1.100	**6119222**
DTG-2F AL1	Aluminium painted	1	1.100	**6119224**

PC Polycarbonate

Data technology support with straight outlet and locking slider to accept two data technology connection modules. The locking fastening is suitable for horizontal and vertical installation in the system environment.

The type F data technology support is suitable for accepting the following data connection modules: Avaya/Systimax: M series.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Data technology support, 1 module, slanting outlet, type F





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTS-2F RW1	Pure white	1	1.500	**6119256**
DTS-2F SWGR1	Black-grey	1	1.500	**6119258**
DTS-2F AL1	Aluminium painted	1	1.500	**6119260**


PC Polycarbonate

Data technology support with slanting outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type F has a special module seat and is designed for indirect fastening of the data connection modules in the mounting opening.

The type F data technology support is suitable for accepting the following data connection modules: Avaya/Systimax: M series.

Data technology support, 1 module, straight outlet, type PA





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTG-2PA RW1	Pure white	1	1.100	**6119226**
DTG-2PA SWGR1	Black-grey	1	1.100	**6119228**
DTG-2PA AL1	Aluminium painted	1	1.100	**6119230**


PC Polycarbonate

Data technology support with straight outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type PA has a special module seat and is designed for indirect fastening of the data connection modules in the mounting opening.

The type PA data technology support is suitable for accepting the following data connection modules: Panduit: Mini-Com.

Data technology support, 1 module, slanting outlet, type PA





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTS-2PA RW1	Pure white	1	1.500	**6119262**
DTS-2PA SWGR1	Black-grey	1	1.500	**6119264**
DTS-2PA AL1	Aluminium painted	1	1.500	**6119266**


PC Polycarbonate

Data technology support with slanting outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type PA has a special module seat and is designed for indirect fastening of the data connection modules in the mounting opening.

The type PA data technology support is suitable for accepting the following data connection modules: Panduit: Mini-Com.

Data technology support, 1 module, straight outlet, type RM





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTG-2RM RW1	Pure white	1	1.100	**6119292**
DTG-2RM SWGR1	Black-grey	1	1.100	**6119294**
DTG-2RM AL1	Aluminium painted	1	1.100	**6119296**

PC Polycarbonate

Data technology support with straight outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type RM has a special module seat and is designed for indirect fastening of the data connection modules in the mounting opening.

The type RM data technology support is suitable for accepting the following data connection modules: Types ASM-C5, ASM-C5 G, ASM-C6 and ASM-C6 G; R&M: Cat.5 and Cat.6 modules without support plate.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Data technology support, 1 module, slanting outlet, type RM

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTS-2RM RW1	Pure white	1	2.900	6119298
DTS-2RM SWGR1	Black-grey	1	2.900	6119300
DTS-2RM AL1	Aluminium painted	1	2.900	6119302

PC Polycarbonate






Data technology support with slanting outlet and locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type RM has a special module seat and is designed for indirect fastening of the data connection modules in the mounting opening.

The type RM data technology support is suitable for accepting the following data connection modules: Types ASM-C5, ASM-C5 G, ASM-C6 and ASM-C6 G; R&M: Cat.5 and Cat.6 modules without support plate.

Data technology support, 1 module, straight outlet, type LE

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
DTG-02LE RW1	Pure white	1	0.900	6119304
DTG-02LE SWGR1	Black-grey	1	0.900	6119306
DTG-02LE AL1	Aluminium painted	1	0.900	6119308

PC Polycarbonate






Data technology support with straight outlet and without a locking slider to accept two data technology connection modules with RJ45 socket. The locking fastening is suitable for horizontal and vertical installation in the system environment. Type LE has a special module seat and is designed for indirect fastening of the data connection modules in the mounting opening.

The type LE data technology support is suitable for accepting the following data connection modules: LexCom/Schneider: LexCom 125, LexCom 250 and LexCom 500.

VGA connection, 1 module, straight outlet, as screw connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-VGA S RW1	Pure white	1	2.400	6104610
MTG-VGA S SWGR1	Black-grey	1	2.400	6104613
MTG-VGA S AL1	Aluminium painted	1	2.400	6104616

PC Polycarbonate






Multimedia support with one VGA connection socket, straight cable outlet, with labelling panel, VGA socket (HD15) with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

VGA connection, 1 module, slanting outlet, as screw connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-VGA S RW1	Pure white	1	2.600	6104622
MTS-VGA S SWGR1	Black-grey	1	2.600	6104625
MTS-VGA S AL1	Aluminium painted	1	2.600	6104628

PC Polycarbonate






Multimedia support with one VGA connection socket, slanting cable outlet, with labelling panel, VGA socket (HD15) with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

VGA connection, 1 module, straight outlet, with connection cable

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-VGA F RW1	Pure white	1	5.200	6104658
MTG-VGA F SWGR1	Black-grey	1	5.200	6104661
MTG-VGA F AL1	Aluminium painted	1	5.200	6104664

PC Polycarbonate






Multimedia support with one VGA connection socket, straight cable outlet, with labelling panel, short VGA connection cable (HD15), socket-socket version. Support with locking fastening, suitable for horizontal and vertical installation in the system environment.

Gesamtkatalog_K1_LFS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

VGA connection, 1 module, slanting outlet, with connection cable






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-VGA F RW1	Pure white	1	5.400	**6104670**
MTS-VGA F SWGR1	Black-grey	1	5.400	**6104673**
MTS-VGA F AL1	Aluminium painted	1	5.400	**6104676**

PC Polycarbonate

Multimedia support with one VGA connection socket, slanting cable outlet, with labelling panel, short VGA connection cable (HD15), socket-socket version. Support with locking fastening, suitable for horizontal and vertical installation in the system environment.

D-Sub9 connection, 1 module, straight outlet, as screw connection






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-DB9 S RW1	Pure white	1	2.400	**6104634**
MTG-DB9 S SWGR1	Black-grey	1	2.400	**6104637**
MTG-DB9 S AL1	Aluminium painted	1	2.400	**6104640**

PC Polycarbonate

Multimedia support with one D-Sub9 connection socket, straight cable outlet, with labelling panel, D-Sub9 socket (RS232) with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

D-Sub9 connection, 1 module, slanting outlet, as screw connection






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-DB9 S RW1	Pure white	1	2.600	**6104646**
MTS-DB9 S SWGR1	Black-grey	1	2.600	**6104649**
MTS-DB9 S AL1	Aluminium painted	1	2.600	**6104652**

PC Polycarbonate

Multimedia support with one D-Sub9 connection socket, slanting cable outlet, with labelling panel, D-Sub9 socket (RS232) with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

D-Sub9 connection, 1 module, straight outlet, with connection cable






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-DB9 F RW1	Pure white	1	5.200	**6104682**
MTG-DB9 F SWGR1	Black-grey	1	5.200	**6104685**
MTG-DB9 F AL1	Aluminium painted	1	5.200	**6104688**

PC Polycarbonate

Multimedia support with one D-Sub9 connection socket, straight cable outlet, with labelling panel, short D-Sub9 connection cable (RS232), socket-socket version. Support with locking fastening, suitable for horizontal and vertical installation in the system environment.

D-Sub9 connection, 1 module, slanting outlet, with connection cable





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-DB9 F RW1	Pure white	1	5.400	**6104694**
MTS-DB9 F SWGR1	Black-grey	1	5.400	**6104697**
MTS-DB9 F AL1	Aluminium painted	1	5.400	**6104700**

PC Polycarbonate

Multimedia support with one D-Sub9 connection socket, slanting cable outlet, with labelling panel, short D-Sub9 connection cable (RS232), socket-socket version. Support with locking fastening, suitable for horizontal and vertical installation in the system environment.

Always indicate the item number when ordering.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Multimedia support for VGA / D-Sub9 plug connector, 1 module, straight outlet

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-DB O RW1	Pure white	1	0.700	**6104706**
MTG-DB O SWGR1	Black-grey	1	0.700	**6104709**
MTG-DB O AL1	Aluminium painted	1	0.700	**6104712**

PC Polycarbonate

Multimedia support for a VGA / D-Sub9 plug connector, straight cable outlet, with labelling panel, without plug connector. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






Multimedia support for VGA / D-Sub9 plug connector, 1 module, slanting outlet

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-DB O RW1	Pure white	1	0.900	**6104718**
MTS-DB O SWGR1	Black-grey	1	0.900	**6104721**
MTS-DB O AL1	Aluminium painted	1	0.900	**6104724**

PC Polycarbonate

Multimedia support for a VGA / D-Sub9 plug connector, slanting cable outlet, with labelling panel, without plug connector. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






DVI-D connection, 1 module, straight outlet, as screw connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-DVI S RW1	Pure white	1	3.500	**6104730**
MTG-DVI S SWGR1	Black-grey	1	3.500	**6104733**
MTG-DVI S AL1	Aluminium painted	1	3.500	**6104736**

PC Polycarbonate

Multimedia support with one DVI-D connection socket, straight cable outlet, with labelling panel, DVI-D socket with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Note: Due to the device dimensions, device installation in Rapid 45 device installation trunking is not possible.






DVI-D connection, 1 module, slanting outlet, as screw connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-DVI S RW1	Pure white	1	3.700	**6104742**
MTS-DVI S SWGR1	Black-grey	1	3.700	**6104745**
MTS-DVI S AL1	Aluminium painted	1	3.700	**6104748**

PC Polycarbonate

Multimedia support with one DVI-D connection socket, slanting cable outlet, with labelling panel, DVI-D socket with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






DVI-I connection, 1 module, straight outlet, with connection cable

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-DVI F RW1	Pure white	1	6.000	**6104754**
MTG-DVI F SWGR1	Black-grey	1	6.000	**6104757**
MTG-DVI F AL1	Aluminium painted	1	6.000	**6104760**

PC Polycarbonate

Multimedia support with one DVI-I connection socket, straight cable outlet, with labelling panel, short DVI-I connection cable, socket-socket version. Support with locking fastening, suitable for horizontal and vertical installation in the system environment.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

DVI-I connection, 1 module, slanting outlet, with connection cable






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-DVI F RW1	Pure white	1	6.200	**6104766**
MTS-DVI F SWGR1	Black-grey	1	6.200	**6104769**
MTS-DVI F AL1	Aluminium painted	1	6.200	**6104772**

PC Polycarbonate

Multimedia support with one DVI-I connection socket, slanting cable outlet, with labelling panel, short DVI-I connection cable, socket-socket version. Support with locking fastening, suitable for horizontal and vertical installation in the system environment.

Multimedia support for DVI plug connector, 1 module, straight outlet






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-DV O RW1	Pure white	1	0.700	**6104778**
MTG-DV O SWGR1	Black-grey	1	0.700	**6104781**
MTG-DV O AL1	Aluminium painted	1	0.700	**6104784**

PC Polycarbonate

Multimedia support for a DVI plug connector, straight cable outlet, with labelling panel, without plug connector. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Multimedia support for DVI plug connector, 1 module, slanting outlet






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-DV O RW1	Pure white	1	0.900	**6104790**
MTS-DV O SWGR1	Black-grey	1	0.900	**6104793**
MTS-DV O AL1	Aluminium painted	1	0.900	**6104796**

PC Polycarbonate

Multimedia support for a DVI plug connector, slanting cable outlet, with labelling panel, without plug connector. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

HDMI connection, 1 module, straight outlet, as screw connection





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-HD S RW1	Pure white	1	3.200	**6104802**
MTG-HD S SWGR1	Black-grey	1	3.200	**6104805**
MTG-HD S AL1	Aluminium painted	1	3.200	**6104808**


PC Polycarbonate

Multimedia support with one HDMI connection socket, straight cable outlet, with labelling panel, HDMI socket with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Note: Due to the device dimensions, device installation in Rapid 45 device installation ducts and ISSR..45 / ISSD..45 service poles is not possible.

HDMI connection, 1 module, slanting outlet, as screw connection





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-HD S RW1	Pure white	1	3.400	**6104814**
MTS-HD S SWGR1	Black-grey	1	3.400	**6104817**
MTS-HD S AL1	Aluminium painted	1	3.400	**6104820**

PC Polycarbonate

Multimedia support with one HDMI connection socket, slanting cable outlet, with labelling panel, HDMI socket with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.

HDMI connection, 1 module, straight outlet, with connection cable

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-HD F RW1	Pure white	1	6.000	**6104826**
MTG-HD F SWGR1	Black-grey	1	6.000	**6104829**
MTG-HD F AL1	Aluminium painted	1	6.000	**6104832**

PC Polycarbonate

Multimedia support with one HDMI connection socket, straight cable outlet, with labelling panel, short HDMI connection cable, socket-socket version. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






HDMI connection, 1 module, slanting outlet, with connection cable

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-HD F RW1	Pure white	1	6.200	**6104838**
MTS-HD F SWGR1	Black-grey	1	6.200	**6104841**
MTS-HD F AL1	Aluminium painted	1	6.200	**6104844**

PC Polycarbonate

Multimedia support with one HDMI connection socket, slanting cable outlet, with labelling panel, short HDMI connection cable, socket-socket version. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






USB 2.0 / 3.0 connection, 1 module, straight outlet, as screw connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-U3A S RW1	Pure white	1	2.500	**6104874**
MTG-U3A S SWGR1	Black-grey	1	2.500	**6104877**
MTG-U3A S AL1	Aluminium painted	1	2.500	**6104880**

PC Polycarbonate

Multimedia support with one USB 3.0 connection socket, straight cable outlet, with labelling panel, USB 3.0 Type A socket with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






USB 2.0 / 3.0 connection, 1 module, slanting outlet, as screw connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-U3A S RW1	Pure white	1	2.700	**6104886**
MTS-U3A S SWGR1	Black-grey	1	2.700	**6104889**
MTS-U3A S AL1	Aluminium painted	1	2.700	**6104892**

PC Polycarbonate

Multimedia support with one USB 3.0 connection socket, slanting cable outlet, with labelling panel, USB 3.0 type A socket with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






USB 2.0 / 3.0 connection, 1 module, straight outlet, with connection cable

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-U3A F RW1	Pure white	1	6.000	**6104922**
MTG-U3A F SWGR1	Black-grey	1	6.000	**6104925**
MTG-U3A F AL1	Aluminium painted	1	6.000	**6104928**

PC Polycarbonate

Multimedia support with one USB 3.0 connection socket, straight cable outlet, with labelling panel, short USB 3.0 type A connection cable, socket-socket version. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

USB 2.0 / 3.0 connection, 1 module, slanting outlet, with connection cable






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-U3A F RW1	Pure white	1	6.200	**6104934**
MTS-U3A F SWGR1	Black-grey	1	6.200	**6104937**
MTS-U3A F AL1	Aluminium painted	1	6.200	**6104940**

PC Polycarbonate

Multimedia support with one USB 3.0 connection socket, slanting cable outlet, with labelling panel, short USB 3.0 type A connection cable, socket-socket version. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Mini jack connection, 1 module, straight outlet, as soldered connection






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-MK L RW1	Pure white	1	1.500	**6104946**
MTG-MK L SWGR1	Black-grey	1	1.500	**6104949**
MTG-MK L AL1	Aluminium painted	1	1.500	**6104952**

PC Polycarbonate

Multimedia support with one mini jack connection socket, straight cable outlet, with labelling panel, mini cinch socket (TRS 3.5 mm) with soldered connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Mini jack connection, 1 module, slanting outlet, as soldered connection






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-MK L RW1	Pure white	1	1.700	**6104958**
MTS-MK L SWGR1	Black-grey	1	1.700	**6104961**
MTS-MK L AL1	Aluminium painted	1	1.700	**6104964**

PC Polycarbonate

Multimedia support with one mini jack connection socket, slanting cable outlet, with labelling panel, mini cinch socket (TRS 3.5 mm) with soldered connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Video cinch connection, 1 module, straight outlet, as soldered connection






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-R L RW1	Pure white	1	1.500	**6104970**
MTG-R L SWGR1	Black-grey	1	1.500	**6104973**
MTG-R L AL1	Aluminium painted	1	1.500	**6104976**

PC Polycarbonate

Multimedia support with one cinch connection socket for composite video, straight cable outlet, with labelling panel, cinch socket (RCA) with soldered connection, colour coding yellow. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Video cinch connection, 1 module, slanting outlet, as soldered connection





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-R L RW1	Pure white	1	1.700	**6104982**
MTS-R L SWGR1	Black-grey	1	1.700	**6104985**
MTS-R L AL1	Aluminium painted	1	1.700	**6104988**

PC Polycarbonate

Multimedia support with one cinch connection socket for composite video, slanting cable outlet, with labelling panel, cinch socket (RCA) with soldered connection, colour coding yellow. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Always indicate the item number when ordering.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Video cinch connection, 1 module, straight outlet, as 1:1 coupling

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-R F RW1	Pure white	1	1.500	**6104994**
MTG-R F SWGR1	Black-grey	1	1.500	**6104997**
MTG-R F AL1	Aluminium painted	1	1.500	**6105000**

PC Polycarbonate

Multimedia support with one cinch connection socket for composite video, straight cable outlet, with labelling panel, cinch coupling (RCA), socket-socket version, colour coding yellow. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






Video cinch connection, 1 module, slanting outlet, as 1:1 coupling

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-R F RW1	Pure white	1	1.700	**6105006**
MTS-R F SWGR1	Black-grey	1	1.700	**6105009**
MTS-R F AL1	Aluminium painted	1	1.700	**6105012**

PC Polycarbonate

Multimedia support with one cinch connection socket for composite video, slanting cable outlet, with labelling panel, cinch coupling (RCA), socket-socket version, colour coding yellow. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






Audio cinch connection, 1 module, straight outlet, as soldered connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-2R L RW1	Pure white	1	2.500	**6105042**
MTG-2R L SWGR1	Black-grey	1	2.500	**6105045**
MTG-2R L AL1	Aluminium painted	1	2.500	**6105048**

PC Polycarbonate

Multimedia support with two cinch connection sockets for audio R/L, straight cable outlet, with labelling panel, two cinch sockets (RCA) with soldered connection, colour coding red/white. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






Audio cinch connection, 1 module, slanting outlet, as soldered connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-2R L RW1	Pure white	1	2.700	**6105054**
MTS-2R L SWGR1	Black-grey	1	2.700	**6105057**
MTS-2R L AL1	Aluminium painted	1	2.700	**6105060**

PC Polycarbonate

Multimedia support with two cinch connection sockets for audio R/L, slanting cable outlet, with labelling panel, two cinch sockets (RCA) with soldered connection, colour coding red/white. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






Audio cinch connection, 1 module, straight outlet, as 1:1 coupling

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-2R F RW1	Pure white	1	2.500	**6105066**
MTG-2R F SWGR1	Black-grey	1	2.500	**6105069**
MTG-2R F AL1	Aluminium painted	1	2.500	**6105072**

PC Polycarbonate

Multimedia support with two cinch connection sockets for audio R/L, straight cable outlet, with labelling panel, two cinch couplings (RCA), socket-socket version, colour coding red/white. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Audio cinch connection, 1 module, slanting outlet, as 1:1 coupling






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-2R F RW1	Pure white	1	2.700	**6105078**
MTS-2R F SWGR1	Black-grey	1	2.700	**6105081**
MTS-2R F AL1	Aluminium painted	1	2.700	**6105084**

PC Polycarbonate

Multimedia support with two cinch connection sockets for audio R/L, slanting cable outlet, with labelling panel, two cinch couplings (RCA), socket-socket version, colour coding red/white. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Component video connection, 1 module, straight outlet, as soldered connection






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-3R L RW1	Pure white	1	3.200	**6105114**
MTG-3R L SWGR1	Black-grey	1	3.200	**6105117**
MTG-3R L AL1	Aluminium painted	1	3.200	**6105120**

PC Polycarbonate

Multimedia support with three cinch connection sockets for component video, straight cable outlet, with labelling panel, three cinch sockets (RCA) with soldered connection, colour coding red / green / blue. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Component video connection, 1 module, slanting outlet, as soldered connection






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-3R L RW1	Pure white	1	3.400	**6105126**
MTS-3R L SWGR1	Black-grey	1	3.400	**6105129**
MTS-3R L AL1	Aluminium painted	1	3.400	**6105132**

PC Polycarbonate

Multimedia support with three cinch connection sockets for component video, slanting cable outlet, with labelling panel, three cinch sockets (RCA) with soldered connection, colour coding red / green / blue. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Component video connection, 1 module, straight outlet, as 1:1 coupling






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-3R F RW1	Pure white	1	3.200	**6105138**
MTG-3R F SWGR1	Black-grey	1	3.200	**6105141**
MTG-3R F AL1	Aluminium painted	1	3.200	**6105144**

PC Polycarbonate

Multimedia support with three cinch connection sockets for component video, straight cable outlet, with labelling panel, three cinch couplings (RCA), socket-socket version, colour coding red / green / blue. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Component video connection, 1 module, slanting outlet, as 1:1 coupling





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-3R F RW1	Pure white	1	3.400	**6105150**
MTS-3R F SWGR1	Black-grey	1	3.400	**6105153**
MTS-3R F AL1	Aluminium painted	1	3.400	**6105156**

PC Polycarbonate

Multimedia support with three cinch connection sockets for component video, slanting cable outlet, with labelling panel, three cinch couplings (RCA), socket-socket version, colour coding red / green / blue. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.

Audio/video cinch connection, 1 module, straight outlet, as soldered connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-12R L RW1	Pure white	1	3.200	**6105162**
MTG-12R L SWGR1	Black-grey	1	3.200	**6105165**
MTG-12R L AL1	Aluminium painted	1	3.200	**6105168**

PC Polycarbonate

Multimedia support with three cinch connection sockets for audio-video, straight cable outlet, with labelling panel, three cinch sockets (RCA) with soldered connection, colour coding yellow / red / white. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






Audio/video cinch connection, 1 module, slanting outlet, as soldered connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-12R L RW1	Pure white	1	3.400	**6105174**
MTS-12R L SWGR1	Black-grey	1	3.400	**6105177**
MTS-12R L AL1	Aluminium painted	1	3.400	**6105180**

PC Polycarbonate

Multimedia support with three cinch connection sockets for audio/video, slanting cable outlet, with labelling panel, three cinch sockets (RCA) with soldered connection, colour coding yellow / red / white. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






Audio/video cinch connection, 1 module, straight outlet, as 1:1 coupling

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-12R F RW1	Pure white	1	3.200	**6105186**
MTG-12R F SWGR1	Black-grey	1	3.200	**6105189**
MTG-12R F AL1	Aluminium painted	1	3.200	**6105192**

PC Polycarbonate

Multimedia support with three cinch connection sockets for audio/video, straight cable outlet, with labelling panel, three cinch couplings (RCA), socket-socket version, colour coding yellow / red / white. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






Audio/video cinch connection, 1 module, slanting outlet, as 1:1 coupling

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-12R F RW1	Pure white	1	3.400	**6105198**
MTS-12R F SWGR1	Black-grey	1	3.400	**6105201**
MTS-12R F AL1	Aluminium painted	1	3.400	**6105204**

PC Polycarbonate

Multimedia support with three cinch connection sockets for audio/video, slanting cable outlet, with labelling panel, three cinch couplings (RCA), socket-socket version, colour coding yellow / red / white. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






BNC connection, 1 module, straight outlet, as 1:1 coupling

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-BC F RW1	Pure white	1	1.500	**6105018**
MTG-BC F SWGR1	Black-grey	1	1.500	**6105021**
MTG-BC F AL1	Aluminium painted	1	1.500	**6105024**

PC Polycarbonate

Multimedia support with one BNC connection socket, straight cable outlet, with labelling panel, BNC cinch coupling, socket-socket version. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

BNC connection, 1 module, slanting outlet, as 1:1 coupling






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-BC F RW1	Pure white	1	1.700	6105030
MTS-BC F SWGR1	Black-grey	1	1.700	6105033
MTS-BC F AL1	Aluminium painted	1	1.700	6105036

PC Polycarbonate

Multimedia support with one BNC connection socket, slanting cable outlet, with labelling panel, BNC cinch coupling, socket-socket version. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

2 x BNC connection, 1 module, straight outlet, as 1:1 coupling






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-2BC F RW1	Pure white	1	2.500	6105090
MTG-2BC F SWGR1	Black-grey	1	2.500	6105093
MTG-2BC F AL1	Aluminium painted	1	2.500	6105096

PC Polycarbonate

Multimedia support with two BNC connection sockets, straight cable outlet, with labelling panel, two BNC couplings, socket-socket version. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

2 x BNC connection, 1 module, slanting outlet, as 1:1 coupling






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTS-2BC F RW1	Pure white	1	2.700	6105102
MTS-2BC F SWGR1	Black-grey	1	2.700	6105105
MTS-2BC F AL1	Aluminium painted	1	2.700	6105108

PC Polycarbonate

Multimedia support with two BNC connection sockets, slanting cable outlet, with labelling panel, two BNC couplings, socket-socket version. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

XLR connection, 1 module, straight outlet, 3-pin socket, as soldered connection






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-X3F L RW1	Pure white	1	3.000	6105210
MTG-X3F L SWGR1	Black-grey	1	3.000	6105213
MTG-X3F L AL1	Aluminium painted	1	3.000	6105216

PC Polycarbonate

Multimedia support with one XLR connection socket, straight cable outlet, without labelling panel, 3-pin XLR socket with soldered connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

XLR connection, 1 module, straight outlet, 3-pin connector, as soldered connection





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-X3M L RW1	Pure white	1	3.000	6105222
MTG-X3M L SWGR1	Black-grey	1	3.000	6105225
MTG-X3M L AL1	Aluminium painted	1	3.000	6105228

PC Polycarbonate

Multimedia support with one XLR connection socket, straight cable outlet, without labelling panel, 3-pin XLR connector with soldered connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.

XLR connection, 1 module, straight outlet, 3-pin socket, as screw connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-X3F S RW1	Pure white	1	3.500	6105250
MTG-X3F S SWGR1	Black-grey	1	3.500	6105252
MTG-X3F S AL1	Aluminium painted	1	3.500	6105254

PC Polycarbonate

Multimedia support with one XLR connection socket, straight cable outlet, without labelling panel, XLR 3-pin socket with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






XLR connection, 1 module, straight outlet, 3-pin connection, as screw connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-X3M S RW1	Pure white	1	3.500	6105258
MTG-X3M S SWGR1	Black-grey	1	3.500	6105260
MTG-X3M S AL1	Aluminium painted	1	3.500	6105262

PC Polycarbonate

Multimedia support with one XLR connection socket, straight cable outlet, without labelling panel, XLR 3-pin socket with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






Speakon connection, 1 module, straight outlet, 4-pin socket, as screw connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-SON S RW1	Pure white	1	2.800	6105270
MTG-SON S SWGR1	Black-grey	1	2.800	6105272
MTG-SON S AL1	Aluminium painted	1	2.800	6105274

PC Polycarbonate

Multimedia support with one Speakon connection socket, straight cable outlet, without labelling panel, Speakon 4-pin socket with screw connection. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






Multimedia support for SLR plug connector, 1 module, straight outlet

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
MTG-X O RW1	Pure white	1	0.600	6105234
MTG-X O SWGR1	Black-grey	1	0.600	6105237
MTG-X O AL1	Aluminium painted	1	0.600	6105240

PC Polycarbonate

Multimedia support for a XLR plug connector, straight cable outlet, without labelling panel, without plug connector. Support plate with locking fastening, suitable for horizontal and vertical installation in the system environment.






Antenna connection, 1 module, TV / radio / SAT, antenna socket

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ANT-3SD RW1	Pure white	1	11.596	6105282
ANT-3SD AL1	Aluminium painted	1	11.000	6105286

PC Polycarbonate

Socket for antenna, BK and satellite reception systems with connection for TV and radio.

Frequency: 5–2150 MHz
Heat attenuation: 5-862 MHz - 1dB
950-2150 MHz - 2 dB
Return channel attenuation: 14 dB
EMC protection class A







Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Equipotential bonding socket, 1 module, straight outlet






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
PAD-ID6 RW1	Pure white	1	5.000	**6120003**
PAD-ID6 SWGR1	Black-grey	1	5.000	**6120001**
PAD-ID6 AL1	Aluminium painted	1	5.000	**6120005**

PC Polycarbonate

Equipotential bonding socket to DIN 42801, socket in black with green-yellow colour ring, cable connection to rear with M6 screw bolt, including two nuts, washers and a serrated washer.

Cable outlet for 3–11 mm cross-section






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
KAL-K11 RW1	Pure white	1	3.500	**6117420**
KAL-K11 SWGR1	Black-grey	1	3.500	**6117421**
KAL-K11 AL1	Aluminium painted	1	3.500	**6117422**

PC Polycarbonate

Two-part cable outlet with labelling panel, consisting of a cable support with strain relief and a cover. The strain relief is suited for cable cross-sections of 3 to 11 mm. The locking fastening is suitable for horizontal and vertical installation in the system environment.

Blanking cover with labelling panel, 1/2 module






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ADP-BF RW0.5	Pure white	1	0.400	**6117410**
ADP-BF SWGR0.5	Black-grey	1	0.400	**6117411**
ADP-BF AL0.5	Aluminium painted	1	0.400	**6117412**

PC Polycarbonate

Blanking cover with labelling panel, suited for labelling devices in Rapid 45 device installation trunking systems and ISS service poles with a 45 mm system opening.

Blanking cover, 1/2 module






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ADP-B RW0.5	Pure white	10	0.400	**6117414**
ADP-B SWGR0.5	Black-grey	10	0.400	**6117415**
ADP-B AL0.5	Aluminium painted	1	0.400	**6117416**

Blanking cover for closing off empty spaces for a half device (1/2 module).

Blanking cover, 1 module






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ADP-B RW1	Pure white	10	0.800	**6117406**
ADP-B SWGR1	Black-grey	10	0.800	**6117407**
ADP-B AL1	Aluminium painted	1	0.800	**6117408**

Blanking cover for closing off empty spaces for a device (one module).

Mounting supports and accessories

Support plate 3 x type A for mounting support





Type	Pack. pcs	Weight kg/100 pcs.	Item No.
MPK 3A	1	1.940	**7408712**

V2A Stainless steel, grade 304

Support plate to accept three data connection modules of the following types: AMP TYCO: SL series 110Connect and Toolless, AMP-Twist; Brand-Rex: unshielded; GG45; TKM RJ MOD; Nexans: LANmark with Adapter Clip.
Dimensions of a mounting opening in mm: 20.10 x 14.80.

Always indicate the item number when ordering.


Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Support plate 2 x type B for mounting support

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
MPK 2B	1	1.920	**7408714**

V2A Stainless steel, grade 304

Support plate to accept two connection modules for data connection modules of the following types BTR: E-DAT; Dätwyler: MS and MS-N; Kerpen: VarioKeystone.
Dimensions of a mounting opening in mm: 19.35/21.55 x 14.85.






Connection module Cat. 5, unshielded, snap-in

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ASM-C5 S	1	1.120	**6117347**

Connection module Cat. 5e unshielded, with a RJ45 slot. Including a dust cover, a cable tie, a snap-in fastening frame and mounting instructions. Suitable for installation in support plates, type MTM 2C and MTM 3C, mounting plate type MPR2 2C, mounting support type MTGE2 2C, MTGE2 15 2C and MTGE2 F 2C.






Connection module Cat. 5, shielded, snap-in

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ASM-C5 GS	1	1.920	**6117343**

Connection module Cat. 5e shielded, with a RJ45 slot. Including an EMC screen hood, a dust cover, a cable tie, a snap-in fastening frame and mounting instructions. Suitable for installation in support plates, type MTM 2C and MTM 3C, mounting plate type MPR2 2C, mounting support type MTGE2 2C, MTGE2 15 2C and MTGE2 F 2C.






Connection module Cat. 6, unshielded, snap-in

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ASM-C6 S	1	1.060	**6117349**

Connection module Cat. 6 unshielded, with a RJ45 slot. Including a dust cover, a cable tie, a snap-in fastening frame and mounting instructions. Suitable for installation in support plates, type MTM 2C and MTM 3C, mounting plate type MPR2 2C, mounting support type MTGE2 2C, MTGE2 15 2C and MTGE2 F 2C.






Connection module Cat. 6, shielded, snap-in

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ASM-C6 GS	1	1.850	**6117345**

Connection module Cat. 6 shielded, with a RJ45 slot. Including an EMC screen hood, a dust cover, a cable tie, a snap-in fastening frame and mounting instructions. Suitable for installation in support plates, type MTM 2C and MTM 3C, mounting plate type MPR2 2C, mounting support type MTGE2 2C, MTGE2 15 2C and MTGE2 F 2C.






Connection module Cat. 6A, unshielded, snap-in

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ASM-C6A	1	1.050	**6117348**

Connection module Cat. 6A (ISO) unshielded, with an RJ45 slot. Including a dust cover, a cable tie, a Keystone fastening frame and mounting instructions. Suitable for installation in the data technology supports of type DTG-2C and DTS-2C, support plate of type MTM 2C and MTM 3C, mounting plate of type MPR2 2C, mounting supports of type MTGE2 2C, MTGE2 15 2C and MTGE2 F 2C.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Connection module Cat. 6A, shielded, snap-in





Type	Pack. pcs	Weight kg/100 pcs.	Item No.
ASM-C6A G	1	1.630	**6117346**

Connection module Cat. 6A (ISO) shielded, with an RJ45 slot. Including an EMC screen hood, a dust cover, a cable tie, a Keystone fastening frame and mounting instructions. Suitable for installation in the data technology supports of type DTG-2C and DTS-2C, support plate of type MTM 2C and MTM 3C, mounting plate of type MPR2 2C, mounting supports of type MTGE2 2C, MTGE2 15 2C and MTGE2 F 2C.

Fastening units

Fastening bracket for GES in UDS





Type	Pack. PU	Weight kg/100 PUs	Item No.
GES4 BG UDS	1	10.000	**7407549**

Alu Aluminium

Fastening bracket for service outlets and junction box inserts in screed-covered duct systems with underfloor boxes of type UDS for screed heights of more than 100 mm.

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18



Modul 45connect® – plug-in installation solutions for raised and cavity floors

The Modul 45connect for underfloor systems is a continuous, connectable installation technology. This is designed for installation in a system floor. Modul 45connect offers the highest level of flexibility, security and cost efficiency.


The system offers all the required installation components: From energy distribution through to device connection in the floor box.



UTC3 with 2 protective contact sockets

Type	Circuit	Connection system	Version	Pack. pcs	Weight kg/100 pcs.	Item No.
UTC3 G W2	1	GST18	Double pure white	1	16.370	**7404662**

The ready-for-connection UTC3 universal support possesses two pre-installed 33° protective contact sockets and one blanking cover for retroinstallation of one installation device of the Modul 45 or Modul 45connect series.






UTC3 with 3 protective contact sockets

Type	Circuit	Connection system	Version	Pack. pcs	Weight kg/100 pcs.	Item No.
UTC3 G W3	1	GST18	Triple pure white	1	19.780	**7404664**

The ready-for-connection UTC3 universal support possesses three pre-installed 33° protective contact sockets with 16 A.






UTC3 with 2+1 protective contact sockets

Type	Circuit	Connection system	Version	Pack. pcs	Weight kg/100 pcs.	Item No.
UTC3 G W2OR1	2	GST18	Double pure white/ Single pure orange	1	26.630	**7404660**

Ready-for-connection UTC3 universal support with halogen-free connection cable. It possesses two pre-installed 33° protective contact sockets in white and one pre-installed 33° protective contact socket in orange with 16 A.






UTC4 with 2 protective contact sockets

Type	Circuit	Connection system	Version	Pack. pcs	Weight kg/100 pcs.	Item No.
UTC4 G W2	1	GST18	Double pure white	1	18.500	**7404674**
UTC4 G OR2	1	GST18	Double pure orange	1	18.460	**7404670**

The ready-for-connection UTC4 universal support possesses two pre-installed 33° protective contact sockets with 16 A and two blanking covers for retroinstallation of two installation devices of the Modul 45 or Modul 45connect series.






UTC4 with 3 protective contact sockets

Type	Circuit	Connection system	Version	Pack. pcs	Weight kg/100 pcs.	Item No.
UTC4 G W3	1	GST18	Triple pure white	1	21.960	**7404680**

The ready-for-connection UTC4 universal support possesses three pre-installed 33° protective contact sockets with 16 A and one blanking cover for retroinstallation of one installation device of the Modul 45 or Modul 45connect series.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

UTC4 with 4 protective contact sockets






Type	Circuit	Connection system	Version	Pack. pcs	Weight kg/100 pcs.	Item No.
UTC4 G W4	1	GST18	4x pure white	1	26.830	**7404682**
UTC4 G OR4	1	GST18	4x pure orange	1	26.730	**7404672**

The ready-for-connection UTC4 universal support possesses four pre-installed 33° protective contact sockets with 16 A.

UTC4 with 2+2 protective contact sockets






Type	Circuit	Connection system	Version	Pack. pcs	Weight kg/100 pcs.	Item No.
UTC4 G W2OR2	2	GST18	Double pure white/ Double pure orange	1	27.290	**7404676**

The ready-for-connection UTC4 universal support possesses two pre-installed 33° protective contact sockets in pure white and two 33° pre-installed protective contact sockets in pure orange with 16 A.

UTC4 with 2+2 protective contact sockets, 2 sockets with surge protection






Type	Circuit	Connection system	Version	Pack. pcs	Weight kg/100 pcs.	Item No.
UTC4 G W2OR2 Ü	2	GST18	Double pure white/ Double pure orange	1	31.300	**7404678**

The ready-for-connection UTC4 universal support possesses two pre-installed 33° protective contact sockets in pure white and two pre-installed 33° protective contact sockets in pure orange with 16 A. The protective contact sockets in pure orange are protected by a type 3 surge protection module according to DIN EN 61643-11.

UTC4 with 3+1 protective contact sockets






Type	Circuit	Connection system	Version	Pack. pcs	Weight kg/100 pcs.	Item No.
UTC4 G W3OR1	2	GST18	Triple pure white/ Single pure orange	1	29.510	**7404684**

Ready-for-connection universal support UTC4 with halogen-free connection cable. It possesses three pre-installed 33° protective contact sockets in pure white and one 33° protective contact socket in pure orange with 16 A.

UTC4 with 3+1 protective contact sockets, 1 socket with surge protection





Type	Circuit	Connection system	Version	Pack. pcs	Weight kg/100 pcs.	Item No.
UTC4 G W3OR1 Ü	2	GST18	Triple pure white/ Single pure orange	1	33.530	**7404686**


Ready-for-connection universal support UTC4 with halogen-free connection cable. It possesses three pre-installed 33° protective contact sockets in white and one 33° protective contact socket in pure orange with 16 A. The protective contact socket in pure orange is protected by a type 3 surge protection module according to DIN EN 61643-11.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

UTC4 with 2+1 protective contact sockets

Type	Circuit	Connection system	Version	Pack. pcs	Weight kg/100 pcs.	Item No.
UTC4 G OR2GN1	2	GST18	Double pure orange / Single mint green	1	32.200	**7404688**






Ready-for-connection universal support UTC4 with halogen-free connection cable. It possesses two pre-installed 33° protective contact sockets in orange and one 33° protective contact socket in mint green with 16 A. A blanking cover allows retroinstallation of one installation device of the Modul 45 or Modul 45connect series.

Modul 45connect® protective contact sockets and UT universal support

Universal support UT3, system length 165 mm

Type	Length mm	Installation technology	Width mm	Height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UT3 45 3	165	Grid M45	76	40	1	10.600	**7408723**

PA Polyamide






Universal support with two strain reliefs, mounting bridge, partition and UT3 P3 cover plate for installation of 3 Modul 45 devices in device installation units of nominal sizes 2, R4, 4, 6 and R7.

Universal support UT4, system length 208 mm

Type	Length mm	Width mm	Height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
UT4 45 4	208	76	40	1	13.500	**7408727**

PA Polyamide






Universal support with two strain reliefs, mounting bridges, partition and UT4 P4 cover plate for installation of 4 Modul 45 devices in device installation units of nominal sizes R7, R9 and 9.

Socket 33°, Connect 45, protective contact, single

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D3C GS RW1	Pure white	1	10.500	**6120810**

PC Polycarbonate






Ready-for-connection protective contact socket single 33°, with increased touch protection, incl. 0.25 m connection cable with GST18 connector and locking clip, 16 A, 250 V~.

Socket 33°, Connect 45, protective contact, single

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D3C GW ROR1	Pure orange	1	10.500	**6120832**
STD-D3C GW MZGN1	Mint green	1	10.500	**6120834**
STD-D3C GW SRO1	Signal red	1	10.500	**6120836**

PC Polycarbonate






Ready-for-connection protective contact socket single 33°, with increased touch protection, incl. 0.25 m connection cable with GST18 connector and locking clip, 16 A, 250 V~.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Socket 33°, Connect 45, protective contact, double






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D3C RW2	Pure white	1	8.500	6120482
STD-D3C ROR2	Pure orange	1	8.500	6120484
STD-D3C MZGN2	Mint green	1	8.500	6120486
STD-D3C SRO2	Signal red	1	8.500	6120488
STD-D3C SWGR2	Black-grey	1	8.500	6120490
STD-D3C AL2	Aluminium painted	1	8.500	6120492

PC Polycarbonate

Power socket with side connection double 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

Socket 33°, Connect 45, protective contact, triple






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
STD-D3C RW3	Pure white	1	11.500	6120502
STD-D3C ROR3	Pure orange	1	11.500	6120504
STD-D3C MZGN3	Mint green	1	11.500	6120506
STD-D3C SRO3	Signal red	1	11.500	6120508
STD-D3C SWGR3	Black-grey	1	11.500	6120510
STD-D3C AL3	Aluminium painted	1	11.500	6120512

PC Polycarbonate

Power socket with side connection triple 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

Socket 33°, Connect 45, with earthing pin, double









Type	STD-F3C RW2	STD-F3C ROR2	STD-F3C MZGN2	STD-F3C SRO2	STD-F3C SWGR2	STD-F3C AL2
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	8.500	8.500	8.500	8.500	8.500	8.500
Item No.	**6120672**	**6120674**	**6120676**	**6120678**	**6120680**	**6120682**

PC Polycarbonate

Socket with earthing pin and side connection, double 33°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

Socket 33°, Connect 45, with earthing pin, triple







Type	STD-F3C RW3	STD-F3C ROR3	STD-F3C MZGN3	STD-F3C SRO3	STD-F3C SWGR3	STD-F3C AL3
Colour	Pure white	Pure orange	Mint green	Signal red	Black-grey	Aluminium painted
Pack. pcs	1	1	1	1	1	1
Weight kg/100 pcs.	11.500	11.500	11.500	11.500	11.500	11.500
Item No.	**6120692**	**6120694**	**6120696**	**6120698**	**6120700**	**6120702**

PC Polycarbonate

Socket with earthing pin and side connection, triple 33°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Connector part adapter, U-shaped, for connection to an STD-D0C / STD-D3C or STD-F0C / STD-F3C socket from the side, for VL extension cable with Wieland connector GST 18i 3p.


Consolidation Point

CP support plate for 3 snap-in plug connectors, 3-pole

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
CP45-TP 3SI	1	6.200	**6108024**

St Steel

Support plate to accept three snap-In connectors, 3-pole, in a Consolidation Point housing.







CP support plate for 4 snap-in plug connectors, 3-pole

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
CP45-TP 4SI	1	5.700	**6108026**

St Steel

Support plate to accept four snap-In connectors, 3-pole, in a Consolidation Point housing.






CP support plate, for 8 data connection modules, type C


Type	Pack. pcs	Weight kg/100 pcs.	Item No.
CP45-TP 8C	1	5.400	**6108028**


St Steel

Support plate, type C, to accept eight data connection modules in a Consolidation Point housing. Type C has a mounting opening of 19.30 x 14.80 mm.

Support plate type C is suitable for accepting the following data connection modules: BTR (Keystone design): Cat.6A Modul und UAE Modul; Corning: Modules with Keystone seat; CobiNet: CobiDat KS module; Dätwyler: KS-T, KS-TS, MS-K and KU-T; EKU: E-Stone; Harting: Prelink Keystone Cat.6A, Fixlink Keystone Cat.6A; Komos: KDM 500 module; Leoni Kerpen: MegaLine-Connect45 socket modules Keystone; OBO: Data connection modules snap-In type ASM-C5 S, ASM-C5 GS, ASM-C6 S, ASM-C6 GS and Keystone type ASM-C6A, ASM-C6A G; R&M: Cat.6A with Keystone fastening; Rutenbeck: UM and UMflex; SETEC: UKJ and XKJ; Telegärtner: AMJ and UMJ.







Energy distributor with GST18 connector system, fixed connection


UVS energy distributor with fixed connection, normal circuit

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
UVS-6S2	1	77.000	**6108000**

St Steel

Energy distributor for heavy current technology with fixed connection, equipped and pre-wired.

Input: One 3-phase circuit via a screwless terminal block, 5-pin, for cable cross-sections of 0.5–4 mm².
Output: Six self-locking connectors, 3-pin, in black, 16 A, type GST18i (socket part: 2 x L1, 2 x L2, 2 x L3).
Internal wiring: PVC non-sheathed cable H07V-U2.5.






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

UVS energy distributor with fixed connection, special circuit





Type	Pack. pcs	Weight kg/100 pcs.	Item No.
UVS-6W2	1	77.000	**6108005**


St Steel

Energy distributor for heavy current technology with fixed connection, equipped and pre-wired.

Input: One 3-phase circuit via a screwless terminal block, 5-pin, for cable cross-sections of 0.5–4 mm².
Output: Six self-locking connectors, 3-pin, in white, 16 A, type GST18i (socket part: 2 x L1, 2 x L2, 2 x L3).
Internal wiring: PVC non-sheathed cable H07V-U2.5.

UVS energy distributor with fixed connection, normal and special circuit





Type	Pack. pcs	Weight kg/100 pcs.	Item No.
UVS-6S6W2	1	146.100	**6108010**


St Steel

Energy distributor for heavy current technology with fixed connection, equipped and pre-wired.

Input: Two 3-phase circuits via a screwless terminal block, 5-pin, for cable cross-sections of 0.5–4 mm².
Output: Twelve self-locking connectors, 3-pin, in white (6x) and black (6x), 16 A, type GST18i (socket part: 2 x L1, 2 x L2, 2 x L3 for each rotary current circuit).
Internal wiring: PVC non-sheathed cable H07V-U2.5.

UVS energy distributor with plug connection, normal circuit





Type	Pack. pcs	Weight kg/100 pcs.	Item No.
UVS-6S2SA	1	79.000	**6108012**


St Steel

Energy distributor for heavy current technology with plug connection, equipped and pre-wired.

Input: One 3-phase circuit using a self-locking connector, 5-pin, type GST18i (connector part).
Output: Six self-locking connectors, 3-pin, in black, 16 A, type GST18i (socket part: 2 x L1, 2 x L2, 2 x L3).
Internal wiring: PVC non-sheathed cable H07V-U2.5.

UVS energy distributor with plug connection, special circuit





Type	Pack. pcs	Weight kg/100 pcs.	Item No.
UVS-6W2SA	1	79.000	**6108014**

St Steel

Energy distributor for heavy current technology with plug connection, equipped and pre-wired.

Input: One 3-phase circuit using a self-locking connector, 5-pin, type GST18i (connector part).
Output: Six self-locking connectors, 3-pin, in white, 16 A, type GST18i (socket part: 2 x L1, 2 x L2, 2 x L3).
Internal wiring: PVC non-sheathed cable H07V-U2.5.

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


UVS energy distributor with plug connection, normal and special circuit

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
UVS-6S6W2SA	1	140.000	**6108016**

St Steel

Energy distributor for heavy current technology with plug connection, equipped and pre-wired.

Input: Two 3-phase circuits using self-locking connectors, 5-pin, type GST18i (connector part).
Output: Twelve self-locking connectors, 3-pin, in white (6x) and black (6x), 16 A, type GST18i (socket part: 2 x L1, 2 x L2, 2 x L3 for each rotary current circuit).
Internal wiring: PVC non-sheathed cable H07V-U2.5.






Connection cables with GST18 connector system

3-wire connection cable, halogen-free, cross-section 2.5 mm², black

Type	Cable length mm	Cross-section mm²	Number of poles	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VL-3Q2.5 H1 SW	1000	2.5	3	Black	1	16.000	**6108450**
VL-3Q2.5 H2 SW	2000	2.5	3	Black	1	32.000	**6108451**
VL-3Q2.5 H3 SW	3000	2.5	3	Black	1	48.000	**6108452**
VL-3Q2.5 H4 SW	4000	2.5	3	Black	1	64.000	**6108453**
VL-3Q2.5 H5 SW	5000	2.5	3	Black	1	80.000	**6108454**
VL-3Q2.5 H6 SW	6000	2.5	3	Black	1	96.000	**6108455**
VL-3Q2.5 H7 SW	7000	2.5	3	Black	1	112.000	**6108456**
VL-3Q2.5 H8 SW	8000	2.5	3	Black	1	128.000	**6108457**
VL-3Q2.5 H9 SW	9000	2.5	3	Black	1	144.000	**6108458**
VL-3Q2.5 H10 SW	10000	2.5	3	Black	1	160.000	**6108459**

Halogen-free connection cables 3 x 2.5 mm² in the version socket – connector with GST18i connection system.






3-wire connection cable, PVC, cross-section 2.5 mm², black

Type	Cable length mm	Cross-section mm²	Number of poles	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VL-3Q2.5 1 SW	1000	2.5	3	Black	1	18.000	**6108150**
VL-3Q2.5 2 SW	2000	2.5	3	Black	1	36.000	**6108151**
VL-3Q2.5 3 SW	3000	2.5	3	Black	1	54.000	**6108152**
VL-3Q2.5 4 SW	4000	2.5	3	Black	1	72.000	**6108153**
VL-3Q2.5 5 SW	5000	2.5	3	Black	1	90.000	**6108154**
VL-3Q2.5 6 SW	6000	2.5	3	Black	1	108.000	**6108155**
VL-3Q2.5 7 SW	7000	2.5	3	Black	1	126.000	**6108156**
VL-3Q2.5 8 SW	8000	2.5	3	Black	1	144.000	**6108157**
VL-3Q2.5 9 SW	9000	2.5	3	Black	1	162.000	**6108158**
VL-3Q2.5 10 SW	10000	2.5	3	Black	1	180.000	**6108159**

Connection cable 3 x 2.5 mm² in the version socket – connector with GST18i connection system.





Installation accessories for GST18 connector system


Connector part 3-pin, spring power connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ST-F GST18i3p SW	Black	1	2.600	**6108050**
ST-F GST18i3p W	White	1	2.620	**6108051**

Connector part, 3-pin, type GST18i with spring power connection for rigid cables of 1.5–2.5 mm², single-wire and ultrasonically welded, fine wire cables 1.5 mm² with end sleeves, unmounted with strain relief, can be terminated in situ, 250 V, 16 A.

Two connections per pole, for cables H05VV, NYM (Ø 7.8–10.33 mm), lockable, a lock should be provided for strain relief according to VDE 0628.

Stripping length: 45 mm
Stripped length: 9 mm






Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Connector part, 3-pin, screw connection






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ST-S GST18i3p SW	Black	1	2.030	6108054
ST-S GST18i3p W	White	1	2.030	6108055

Connector part, 3-pin, type GST18i with screw connection, low height (no slot loss in combination with distributor blocks), for cross-sections of 0.75–2.5 mm², single- and fine-wire cables connectable without end sleeve, for cable diameters between 6.5–10.5 mm (H05VV, NYM), unmounted with strain relief, terminable in situ, 250 V, 16 A.

Stripping length: 31 mm
Insulation removal length: 7 mm

Connector part, 3-pin, screw connection






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ST-S4 GST18i3 SW	Black	1	1.600	6108060
ST-S4 GST18i3 W	White	1	1.600	6108062

PA Polyamide

Connector part, 3-pin, type GST18i with screw connection for cables of 1.5–4.0 mm² and cable diameters between 10.5–14.5 mm (H05VV, NYM), unmounted with strain relief, terminable in situ, 250 V, 16 A.

Socket section 3-pin, spring power connection





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
BT-F GST18i3p SW	Black	1	2.620	6108052
BT-F GST18i3p W	White	1	2.690	6108053


Socket part, 3-pin, type GST18i with spring power connection for rigid cables of 1.5–2.5 mm², single-wire and ultrasonically welded, fine wire cables 1.5 mm² with end sleeves, unmounted with strain relief, can be terminated in situ, 250 V, 16 A.

Two connections per pole, for cables H05VV, NYM (Ø 7.8–10.33 mm), lockable, a lock should be provided for strain relief according to VDE 0628.

Stripping length: 45 mm
Stripped length: 9 mm

Socket section 3-pin, screw connection







Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
BT-S GST18i3p SW	Black	1	2.150	6108056
BT-S GST18i3p W	White	1	2.150	6108057

Socket part, 3-pin, type GST18i with screw connection, low height (no slot loss in combination with distributor blocks), for cross-sections of 0.75–2.5 mm², single- and fine-wire cables connectable without end sleeve, for cable diameters between 6.5–10.5 mm (H05VV, NYM), unmounted with strain relief, terminable in situ, 250 V, 16 A.

Stripping length: 31 mm
Insulation removal length: 7 mm

Socket section 3-pin, screw connection





Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
BT-S4 GST18i3 SW	Black	1	1.600	6108064
BT-S4 GST18i3 W	White	1	1.600	6108066

PA Polyamide

Socket section, 3-pin, type GST18i with screw connection for cables of 1.5–4.0 mm² and for cable diameters between 10.5–14.5 mm (H05VV, NYM), unmounted with strain relief, terminable in situ, 250 V, 16 A.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18


Always indicate the item number when ordering.

Distributor block, 3-pole

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VB-2 GST18i3p	Black	1	3.300	6108086

PA Polyamide

Distributor block with lock, type GST18i, 1 input with 3-pin plug section and 2 outputs with 3-pin socket section.






Connector part, 5-pin, screw connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ST-S GST18i5p SW	Black	1	4.330	6108070

Connector part, 5-pin, type GST18i, with screw connection for 1.5–2.5 mm² cables, single and fine-wire, with strain relief, one connection per pin, unmounted, for cables H05VV (Ø 9.5–13.5) NYM and (Ø 10.5–13.5 mm), lockable, according to the strain relief in VDE 0628 a lock should be planned, 250 V, 16 A.

Stripping length: 8 mm
Jacket removal length: 46 mm






Socket section 5-pin, screw connection

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
BT-S GST18i5p SW	Black	1	4.550	6108072

Socket part, 5-pin, type GST18i, with screw connection for 1.5 to 2.5 mm² cables, single and fine-wire, with strain relief, one connection per pin, unmounted, for cables H05VV (Ø 9.5 – 13.5) NYM and (Ø 10.5 to 13.5 mm), lockable, according to the strain relief in VDE 0628 a lock should be planned, 250 V, 16 A.

Stripping length: 8 mm
Jacket removal length: 46 mm






Distributor block, 3-pin, T-shaped

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VB-T GST18i3p	Black	1	2.540	6108084

T distributor with lock, type GST18i, one input with 3-pin connector part and two outputs with 3-pin socket part.







Distributor block 3-pin

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VB-3 GST18i3p	Black	1	3.590	6108080
VB-5 GST18i3p	Black	1	5.590	6108082

Distributor block with lock, type GST18i, one input with plug section 3-pin and three outputs with socket section 3-pin.







Locking

Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
VR-GST18	Black	10	0.100	6108074

PA Polyamide

Locking clip for GST18, plug connections, for locking connection cables.







Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Lined body for round installation unit of nominal size R9







Type	Dimension d Ø mm	Screed height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
SK HB R305	305	50	1	21.500	**7404408**

PS Polystyrene

Screed protection cover for cavity floor with screed topping for round service outlets and height-adjustable cassettes of nominal size R9.

Lined body for rectangular installation unit of nominal size 4







Type	Dimension d Ø mm	Screed height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
SK HB 201X201	—	50	1	15.000	**7425600**

PS Polystyrene

Screed protection cover for cavity floor with screed topping for height-adjustable square cassettes of nominal size 4.

Lined body for rectangular installation unit of nominal size 9






Type	Dimension d Ø mm	Screed height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
SK HB 245X245	—	50	1	18.500	**7404412**

PS Polystyrene

Screed protection cover for cavity floor with screed topping for height-adjustable square cassettes of nominal size 9.

Cord outlet for raised floor for dry-care floor, with cord outlet






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ULA DB SA 7011	Iron grey	1	21.200	**7407894**

PA Polyamide

Cord outlet for installation in dry and moist-cleaned raised floors. The cord outlet can be closed flush to the floor if unused.

Cord outlet for raised floor for dry-care floor, with tube body






Type	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ULA DB T 7011	Iron grey	1	20.100	**7407896**

PA Polyamide

Cord outlet for installation in wet-cleaned raised floors. The cord outlet can be closed flush to the floor if unused.

Cord outlet for raised floor for dry-care floor, blank





Type	Depth of the floor covering recess mm	Colour	Pack. pcs	Weight kg/100 pcs.	Item No.
ULA DB 7011	5	Iron grey	1	130.000	**7407898**


PA Polyamide

Blanking lock of an opening in a raised floor, intended for the installation of a cord outlet.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

Always indicate the item number when ordering.

Fire protection in underfloor systems

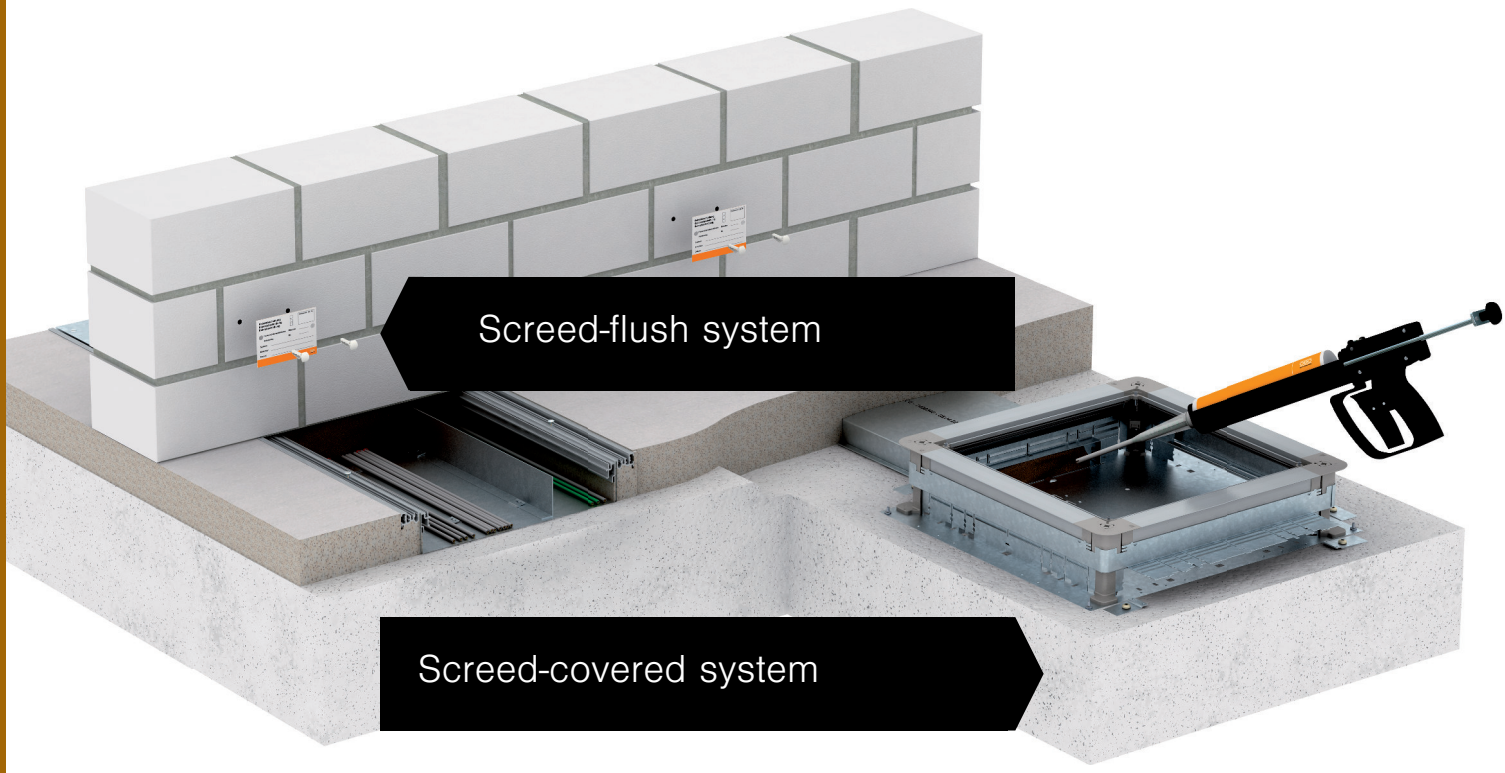

System floors directive
The master system floors directive (MSysBöR) is of key significance for fire protection measures in underfloor systems. This directive is a supplement to the Master Cable Systems Directive (MLAR). The MLAR describes the fire protection requirements for the penetration of cables through classified walls and ceilings, the fireproof installation in emergency and escape routes and requirements for electrical function maintenance. In these validity areas, the three protection aims must be implemented: Protect fire sections, secure escape routes and maintain electrical functionality.

Focus on emergency and escape routes
The system floors directive deals primarily with the installation of underfloor systems in emergency and escape routes (see also MLAR, Section 3.2.1). However, other rooms of a building may be subject to fire protection requirements for the system floors.

System floors
System floors are primarily approved in the necessary staircases, in rooms between necessary staircases and exits to the open air, as well as in the necessary corridors and other rooms. System floors are forbidden in safety stairwells.

The system floors directive distinguishes between cavity floors and raised floors. Whilst cavity floors have a poured support layer made of screed, with a maximum cavity of 200 mm, raised floors are made of prefabricated support plates on a stand structure.

Poured floors
In most emergency and escape routes, poured floors are used. If underfloor systems are used here to supply electrical energy, then these ducts and trunking must fulfil certain requirements. Only inspection openings are permitted in these areas.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/23 08:45:08 (LLExport_02579) / 2019/04/23

2-component fire protection foam PYROSIT® NG

Type	Contents ml	Pack. pcs	Weight kg/100 pcs.	Item No.
FBS-S	380	1	64.600	**7203800**

PYROSIT® NG 2-component fire protection foam in a cartridge, including 2 mixing tubes.
To create cable and combination insulation; always process with the cartridge pistols FBS-PH or FBS-PA.
In dry, frost-free rooms, the cartridge can be stored closed and standing upright at temperatures from +5 °C to +30 °C for up to 12 months.



PYROSIT® NG Starter Set

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
FBS-ST	1	188.700	**7203805**

The PYROSIT® NG Starter Set contains all the required products to create foam insulations. The complete set consists of a cartridge of PYROSIT® NG and a cartridge pistol.



Mixer pipe set

Type	Pack. PU	Weight kg/100 PUs	Item No.
FBS-M	1	10.000	**7203803**

10 mixing tubes and 5 extension tubes in the set for PYROSIT® NG fire protection foam.



Fire protection case

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
FBS-K	1	420.000	**7203809**

The PYROSIT® NG fire protection case contains all the required products to create foam insulations. The complete set consists of: 3 x FBS-S, 1 x FBS-PH, 6 mixing and 5 extension pipes.



Professional cartridge pistol

Type	Pack. pcs	Weight kg/100 pcs.	Item No.
FBS-PH	1	120.000	**7203806**

High-quality 2-component cartridge pistol for use with the PYROSIT® NG fire protection foam.
The parallel movement of the outlet to the holding grip ensures easy working.




PYROPLUG® Block foam block

Type	Dimension mm	Pack. pcs	Weight kg/100 pcs.	Item No.
FBA-B200-14	200x144x60	4	44.800	**7202505**

Permanently elastic, closed-pore foam

Foam block for cable and combination insulation, can also be used as a filler block in the PYROSIT® NG fire protection foam system.
The blocks must be protected against water in order to guarantee safe expansion in the case of fire.







Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/23 08:45:08 (LLExport_02579) / 2019/04/23

Always indicate the item number when ordering.

PYROPLUG® Block vacuum block





Type	Dimension mm	Pack. pcs	Weight kg/100 pcs.	Item No.
FBA-BV200-14	200x144x25	1	40.000	**7202515**

Permanently elastic, closed-pore foam

Vacuum block for cable and combination insulation.
After cutting into the foil, the vacuum block expands to its original size. It can be used with or without foil.
The blocks must be protected against water in order to guarantee safe expansion in the case of fire.

PYROPLUG® Screed filler




Type	Contents ml	Pack. pcs	Weight kg/100 pcs.	Item No.
FBA-SP	310	1	46.000	**7202322**


Intumescent material

Fire protection filler in a cartridge.
Usable as small insulation and as joint closing compound in all insulation of the PYROPLUG® series.
In dry, frost-free rooms, the fire protection filler can be stored for up to 12 months at a temperature of +5 °C to +30 °C.

Soft insulation, PYROPLATE® Fibre

Mineral fibre plate, pre-coated






Type	Length mm	Width mm	Height mm	Pack. pcs	Weight kg/100 pcs.	Item No.
PSX-P	1000	600	50	4	625.000	**7202295**

Mineral fibres

Mineral fibre plate, pre-coated with the ablation coating ASX, as the basis for the soft insulation.

Identification plate





Type	Language	Pack. pcs	Weight kg/100 pcs.	Item No.
KS-S DE	German	1	2.400	**7205425**
KS-S EN	English	1	2.400	**7205429**

PS Polystyrene

Universal identification plate to be written on with waterproof and light-resistant felt-tip pen for all types of OBO insulation. For approved identification, including two push-fit anchors.

Pipe shell PYROCOMB® Intube

Ablation coating in a cartridge



Type	Contents ml	Pack. pcs	Weight kg/100 pcs.	Item No.
ASX-K	310	1	50.000	**7202310**

Intumescent material

Combined, endothermic and weatherproof coating for internal and external areas. Universal protection coating for cable and cable support structures. Use as direct filler, and as paint when stirred.
Material class DIN 4102 - B2, normally flammable.
In dry, frost-free rooms, the coating can be stored at temperatures from +5 °C to +25 °C for up to 18 months in closed, upright original containers.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/23 08:45:08 (LLExport_02579) / 2019/04/23

Always indicate the item number when ordering.

Ablation coating in a bucket

Type	Contents kg	Pack. pcs	Weight kg/100 pcs.	Item No.
ASX-E	5	1	500.000	**7202312**




Intumescent material

Combined, endothermic and weatherproof coating for internal and external areas. Universal protection coating for cable and cable support structures. Use as direct filler, and as paint when stirred. Sufficient for an area of 4 m².
Material class DIN 4102 - B2, normally flammable.
In dry, frost-free rooms, the coating can be stored at temperatures from +5 °C to +25 °C for up to 18 months in closed, upright original containers.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/23 08:45:08 08:45:08 (LLExport_02579) / 2019/04/23

Always indicate the item number when ordering.

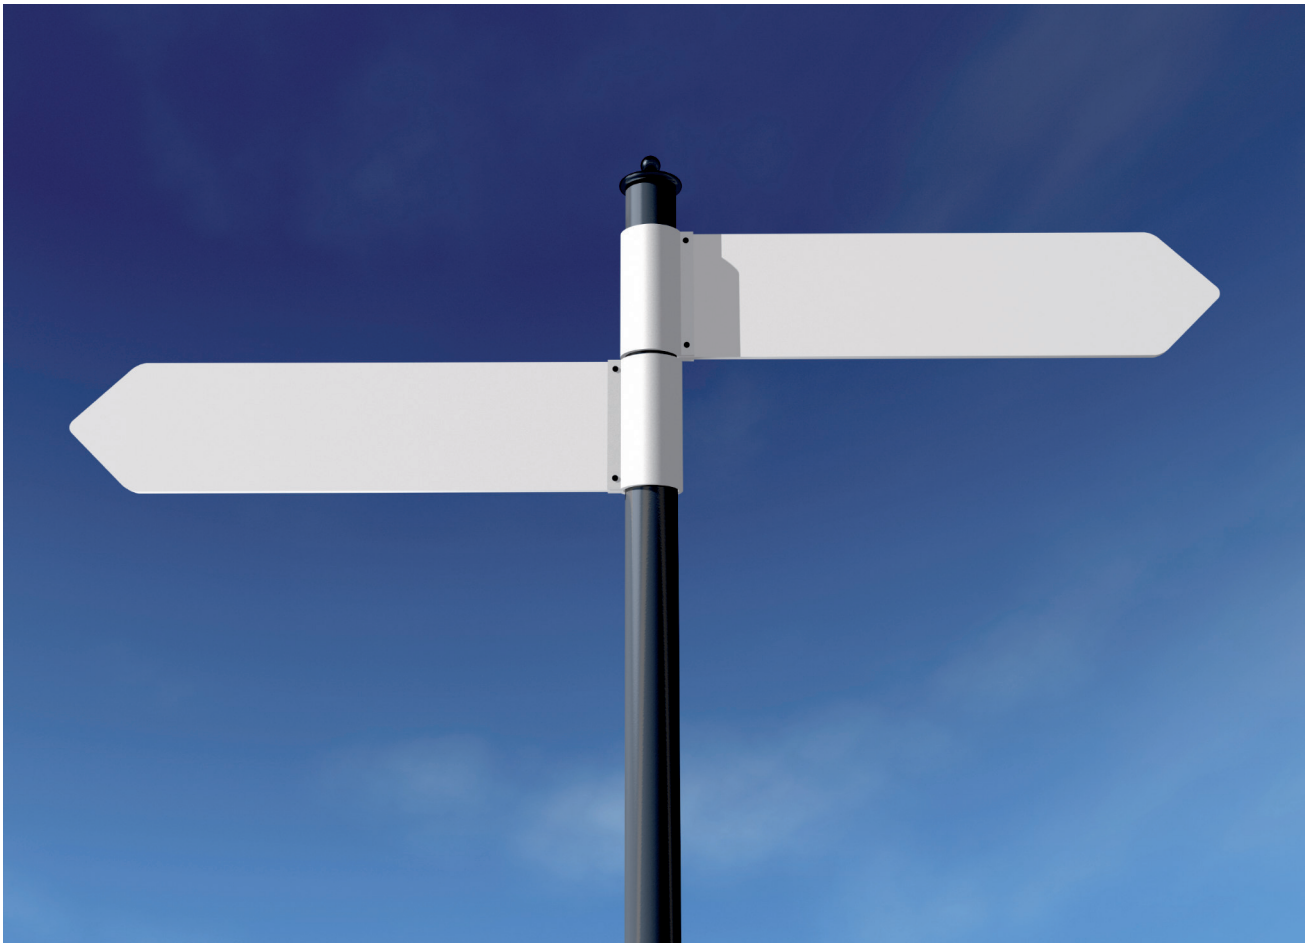

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

Directories



Numeric directory 466

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

GTIN	Art. no.	Page
	price/100	
5044291	**1115057**	104
5044352	**1115065**	104
5045434	**1115650**	104
5045496	**1115669**	104
	/100 pc.	
5229513	**2351064**	295
	/pc.	
5851417	**3031500**	295
	/100 pc.	
5851059	**3105016**	295
5851110	**3105024**	295
5851172	**3105032**	295
	/m	
6651290	**3498103**	295
	/100 pc.	
6559657	**3498108**	295
	/m	
6362530	**6020801**	81
6016273	**6020887**	38
6016334	**6020895**	39
6016396	**6020909**	41
6016877	**6021018**	39
6016990	**6021034**	41
	/pc.	
6017171	**6021093**	40
6017652	**6021190**	40
6018253	**6021336**	40
6018857	**6021492**	39
6018918	**6021506**	41
6018970	**6021514**	42
6019212	**6021697**	38
6019274	**6021700**	41
6019335	**6021719**	38
6019397	**6021727**	41
6019458	**6021735**	39
6019519	**6021743**	42
	/m	
6019816	**6021840**	46
6019878	**6021859**	47
6019939	**6021867**	50
6019991	**6021875**	52
6637577	**6021883**	49
6638956	**6021891**	53
6020119	**6021913**	44
6020171	**6021948**	42
6020232	**6022006**	44
6020294	**6022014**	46
6020355	**6022022**	47
6637515	**6022030**	49
6020416	**6022049**	50
6638895	**6022057**	53
6020478	**6022065**	52
	/pc.	
6020539	**6022073**	43
6020713	**6022111**	45
6020836	**6022146**	46
6020959	**6022162**	48
6021079	**6022189**	51
6021130	**6022197**	52
6021253	**6022219**	44
6021376	**6022235**	46
6021499	**6022251**	47
6021611	**6022286**	50
6021673	**6022294**	52
6021796	**6022316**	45
6021918	**6022332**	47
6022038	**6022359**	48
6022151	**6022375**	51
6022212	**6022383**	43
6022274	**6022391**	53
6022519	**6022448**	43
6022694	**6022499**	44
6022755	**6022502**	45
6022816	**6022529**	48
6022878	**6022545**	51
6022939	**6022561**	53
6022991	**6022588**	47

GTIN	Art. no.	Page
	/m	
6023110	**6022669**	62
6023172	**6022685**	62
6023233	**6022707**	62
6023356	**6022723**	63
6637690	**6022731**	63
6023479	**6022774**	63
	/100 pc.	
6364091	**6022928**	103
6023776	**6022995**	63
	/pc.	
6023837	**6023002**	45
6023950	**6023029**	46
6024070	**6023045**	48
6024193	**6023061**	51
	/m	
6024377	**6023118**	60
	/pc.	
6024438	**6023126**	52
6024551	**6023142**	40
6024919	**6023207**	60
6025039	**6023223**	43
6025459	**6023312**	39
6025572	**6023339**	42
	/100 pc.	
6026111	**6023509**	64
6026173	**6023517**	64
6026234	**6023525**	64
6637874	**6023533**	64
6026296	**6023541**	64
6026357	**6023576**	64
6639250	**6023584**	65
	/pc.	
6027132	**6024009**	61
6027255	**6024025**	62
6027316	**6024033**	62
	/100 pc.	
5787235	**6024070**	61
	/pc.	
6638116	**6024432**	49
6639496	**6024440**	53
6027491	**6024467**	55
6027552	**6024475**	56
6027613	**6024483**	57
6502097	**6024505**	59
6638291	**6024521**	49
6639670	**6024548**	54
6027675	**6024564**	55
6027736	**6024572**	56
6027798	**6024580**	58
6638475	**6024599**	50
6639854	**6024602**	54
6027859	**6024610**	55
6027910	**6024629**	57
6027972	**6024637**	58
6501311	**6024653**	59
6501915	**6024688**	59
6501670	**6024718**	59
6638659	**6024769**	49
6640034	**6024777**	54
6028030	**6024793**	55
6028092	**6024807**	57
6028153	**6024815**	58
6637935	**6024823**	50
6639311	**6024831**	54
6028214	**6024858**	56
6028276	**6024874**	57
6028337	**6024882**	58
6651375	**6024904**	60
	/m	
6667338	**6024947**	26
6642250	**6024955**	26
6642311	**6024963**	26
6642373	**6024971**	26
6332779	**6025005**	27
6332830	**6025013**	27
6332892	**6025021**	27
6794539	**6025048**	27
6667390	**6025102**	30
6028399	**6025110**	30
6028450	**6025129**	30
6028511	**6025137**	28

GTIN	Art. no.	Page
	/m	
6028573	**6025153**	30
6028634	**6025161**	28
6028870	**6025412**	37
6028931	**6025420**	37
6028993	**6025447**	37
6029051	**6025617**	38
6029112	**6025633**	38
6029174	**6025668**	42
6029778	**6026176**	55
6029839	**6026184**	55
6029891	**6026192**	56
6029952	**6026206**	56
6030132	**6026273**	57
6030194	**6026281**	57
6642076	**6026311**	58
6642137	**6026338**	58
6642793	**6026362**	31
6642854	**6026370**	31
6030255	**6026419**	32
6030316	**6026427**	32
6030439	**6026443**	34
6030491	**6026451**	34
6794591	**6026486**	34
6667574	**6026796**	35
6332953	**6026818**	35
6333011	**6026826**	35
6333073	**6026834**	35
6667635	**6026842**	36
6640874	**6026850**	36
6640935	**6026869**	36
6030675	**6026982**	60
6030736	**6026990**	60
6667697	**6027016**	37
6667758	**6027024**	38
6667819	**6027032**	39
6667871	**6027040**	41
6667994	**6027105**	42
6668052	**6027113**	44
6668113	**6027121**	46
6668175	**6027148**	47
6668236	**6027156**	49
6668298	**6027164**	50
6668359	**6027172**	52
6668410	**6027180**	53
6668472	**6027229**	55
6668533	**6027237**	56
6668595	**6027245**	57
6668656	**6027253**	58
6639137	**6027504**	63
6030859	**6027601**	62
6030972	**6027636**	62
6031030	**6027644**	62
6031092	**6027652**	63
6031153	**6027660**	62
6031214	**6027679**	63
6031276	**6027687**	63
6669134	**6028136**	62
5694540	**6062068**	314
5694571	**6062114**	314
5694588	**6062122**	314
5694595	**6062132**	314
	/pc.	
5694724	**6067970**	315
5898023	**6104610**	184
5898061	**6104613**	184
5898085	**6104616**	184
5898122	**6104622**	184
5898139	**6104625**	184
5898146	**6104628**	184
5898177	**6104634**	183
5898191	**6104637**	183
5898245	**6104640**	183
5898269	**6104646**	183
5898313	**6104649**	183
5898320	**6104652**	183
5898375	**6104658**	185
5898436	**6104661**	185
5898443	**6104664**	185

GTIN	Art. no.	Page
	/pc.	
5898481	**6104670**	185
5898498	**6104673**	185
5898504	**6104676**	185
5898535	**6104682**	183
5898542	**6104685**	183
5898559	**6104688**	183
5898566	**6104694**	183
5898573	**6104697**	183
5898580	**6104700**	183
5898597	**6104706**	192
5898603	**6104709**	192
5898610	**6104712**	192
5898627	**6104718**	193
5898634	**6104721**	193
5898641	**6104724**	193
5898658	**6104730**	191
5898665	**6104733**	191
5898672	**6104736**	191
5898689	**6104742**	191
5898696	**6104745**	191
5898702	**6104748**	191
5898719	**6104754**	191
5898726	**6104757**	191
5898733	**6104760**	191
5898740	**6104766**	191
5898757	**6104769**	191
5898764	**6104772**	191
5898771	**6104778**	193
5898788	**6104781**	193
5898795	**6104784**	193
5898849	**6104790**	193
5898856	**6104793**	193
5898863	**6104796**	193
5898894	**6104802**	192
5898917	**6104805**	192
5898924	**6104808**	192
5898931	**6104814**	192
5898955	**6104817**	192
5898979	**6104820**	192
5899013	**6104826**	192
5899020	**6104829**	192
5899044	**6104832**	192
5899082	**6104838**	192
5899105	**6104841**	192
5899150	**6104844**	192
5899334	**6104874**	183
5899341	**6104877**	183
5899372	**6104880**	183
5899389	**6104886**	184
5899396	**6104889**	184
5899402	**6104892**	184
5899648	**6104922**	184
5899709	**6104925**	184
5899754	**6104928**	184
5899808	**6104934**	184
5899853	**6104937**	184
5899884	**6104940**	184
5899921	**6104946**	185
5899938	**6104949**	185
5899945	**6104952**	185
5899976	**6104958**	185
5899983	**6104961**	185
5899990	**6104964**	185
5900047	**6104970**	185
5900108	**6104973**	185
5900122	**6104976**	185
5900160	**6104982**	186
5900214	**6104985**	186
5900221	**6104988**	186
5900238	**6104994**	186
5900245	**6104997**	186
5900283	**6105000**	186
5900290	**6105006**	186
5900306	**6105009**	186
5900337	**6105012**	186
5900344	**6105018**	189
5900351	**6105021**	189
5900368	**6105024**	189
5900405	**6105030**	189
5900412	**6105033**	189
5900429	**6105036**	189
5900467	**6105042**	186
5900474	**6105045**	186

GTIN	Art. no.	Page
	/pc.	
5900481	**6105048**	186
5900511	**6105054**	186
5900528	**6105057**	186
5900535	**6105060**	186
5900542	**6105066**	187
5900559	**6105069**	187
5900566	**6105072**	187
5900573	**6105078**	187
5900580	**6105081**	187
5900597	**6105084**	187
5900603	**6105090**	189
5900641	**6105093**	189
5898900	**6105096**	189
5898948	**6105102**	189
5898962	**6105105**	189
5898986	**6105108**	189
5899037	**6105114**	187
5899075	**6105117**	187
5899099	**6105120**	187
5899136	**6105126**	187
5899143	**6105129**	187
5899167	**6105132**	187
5899204	**6105138**	187
5899228	**6105141**	187
5899259	**6105144**	187
5899273	**6105150**	188
5899457	**6105153**	188
5899464	**6105156**	188
5899501	**6105162**	188
5899525	**6105165**	188
5899570	**6105168**	188
5899617	**6105174**	188
5899624	**6105177**	188
5899686	**6105180**	188
5899693	**6105186**	188
5899730	**6105189**	188
5899747	**6105192**	188
5899761	**6105198**	189
5899815	**6105201**	189
5899822	**6105204**	189
5899860	**6105210**	190
5899877	**6105213**	190
5900009	**6105216**	190
5900054	**6105222**	190
5900061	**6105225**	190
5900092	**6105228**	190
5900115	**6105234**	193
5900177	**6105237**	193
5900184	**6105240**	193
6102051	**6105250**	190
6102068	**6105252**	190
6102099	**6105254**	190
6102105	**6105258**	190
6102112	**6105260**	190
6102129	**6105262**	190
6102150	**6105270**	190
6102167	**6105272**	190
6102174	**6105274**	190
6164752	**6105282**	191
6164790	**6105286**	191
6594603	**6105300**	218
6594641	**6105302**	218
6594665	**6105304**	218
5122265	**6108000**	266
5122272	**6108005**	266
5122289	**6108010**	266
5522997	**6108012**	267
5685050	**6108013**	267
5523000	**6108014**	267
5685067	**6108015**	267
5523017	**6108016**	267
6584758	**6108024**	207
6584765	**6108026**	207
6584796	**6108028**	207
5896975	**6108045**	199
5273530	**6108050**	200
5273547	**6108051**	200
5273585	**6108052**	200
5273592	**6108053**	200
5273608	**6108054**	200
5273646	**6108055**	200
5273653	**6108056**	200
5273660	**6108057**	200

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

GTIN	Art. no.	Page
	/pc.	
6584680	**6108060**	200
6584697	**6108062**	200
6584703	**6108064**	201
6584734	**6108066**	201
5273707	**6108070**	201
5273714	**6108072**	202
6584741	**6108074**	202
5273721	**6108080**	201
5273769	**6108082**	201
5273776	**6108084**	201
6584673	**6108086**	201
5123064	**6108150**	202
5123101	**6108151**	202
5123118	**6108152**	202
5123125	**6108153**	202
5123163	**6108154**	202
5123170	**6108155**	202
5123187	**6108156**	202
5123224	**6108157**	202
5123231	**6108158**	202
5123248	**6108159**	202
5124368	**6108450**	202
5124375	**6108451**	202
5124382	**6108452**	202
5124429	**6108453**	202
5124436	**6108454**	202
5124443	**6108455**	202
5124481	**6108456**	202
5124498	**6108457**	202
5124504	**6108458**	202
5124542	**6108459**	202
5125037	**6109800**	274
6101511	**6109801**	276
5125044	**6109802**	273
5125075	**6109804**	273
5125082	**6109806**	273
5125099	**6109808**	273
5125105	**6109810**	274
5125136	**6109812**	273
5125143	**6109814**	274
5125150	**6109816**	274
5125167	**6109818**	274
5125198	**6109820**	275
5287391	**6109821**	275
5125204	**6109822**	279
5125211	**6109825**	275
5125228	**6109827**	279
6404704	**6109829**	282
5125266	**6109832**	275
5125273	**6109834**	275
6101528	**6109835**	277
5125280	**6109836**	276
6101559	**6109837**	277
5125310	**6109838**	276
5428459	**6109839**	276
5125327	**6109840**	276
6101566	**6109841**	277
5125334	**6109842**	276
6101573	**6109843**	277
5125341	**6109850**	281
5125372	**6109852**	281
5125389	**6109854**	281
6169368	**6109856**	280
6169375	**6109858**	281
5125396	**6109860**	280
5125402	**6109861**	280
5125440	**6109862**	275
5125501	**6109865**	281
5125525	**6109867**	281
5125532	**6109868**	280
	/m	
5125549	**6109870**	282
	/pc.	
6169351	**6109873**	279
5125594	**6109874**	279
5125600	**6109876**	279
5477440	**6109878**	280
5477457	**6109879**	280
6486021	**6109887**	282
	/m	
6417902	**6112400**	123
6417919	**6112403**	123

GTIN	Art. no.	Page
	/m	
6417926	**6112410**	124
6417933	**6112413**	124
	/pc.	
6417964	**6112420**	124
6417971	**6112423**	124
6417995	**6112430**	123
6418008	**6112433**	123
6418022	**6112440**	123
6418039	**6112443**	123
	/m	
6418213	**6112500**	125
6418251	**6112503**	125
	/pc.	
6418275	**6112510**	126
6418299	**6112513**	126
6418329	**6112520**	126
6418336	**6112523**	126
6418350	**6112530**	125
6418367	**6112533**	125
	/m	
6418503	**6112600**	127
6418534	**6112603**	127
	/pc.	
6418558	**6112610**	128
6418541	**6112613**	128
6418572	**6112620**	128
6418596	**6112623**	128
6418619	**6112630**	128
6418626	**6112633**	128
	/m	
6419036	**6113000**	114
6419074	**6113002**	114
6419081	**6113010**	115
6419104	**6113012**	115
	/pc.	
6419111	**6113020**	114
6419142	**6113022**	114
6417940	**6113024**	123
6419159	**6113030**	116
6419166	**6113032**	116
6417957	**6113034**	125
6419173	**6113040**	115
6419197	**6113042**	115
6419203	**6113050**	115
6419210	**6113052**	115
6417988	**6113054**	124
6419227	**6113060**	114
6419234	**6113062**	114
6419258	**6113070**	114
6419265	**6113072**	114
6418015	**6113074**	123
6419272	**6113080**	114
6419289	**6113082**	114
6419296	**6113090**	114
6419319	**6113092**	114
6418046	**6113094**	123
6419333	**6113100**	115
6419340	**6113102**	115
6418176	**6113104**	124
6419357	**6113110**	115
6419371	**6113112**	115
6418206	**6113114**	124
	/m	
6419388	**6113200**	116
6419395	**6113202**	116
	/pc.	
6419418	**6113210**	116
6419432	**6113212**	116
6418268	**6113214**	125
6419456	**6113220**	117
6419463	**6113222**	117
6419470	**6113230**	117
6419500	**6113232**	117
6418305	**6113234**	126
6419517	**6113240**	117
6419531	**6113242**	117
6419555	**6113250**	117
6419562	**6113252**	117
6418312	**6113254**	126
6419586	**6113260**	116
6419609	**6113262**	116
6419616	**6113270**	116
6419630	**6113272**	116

GTIN	Art. no.	Page
	/pc.	
6418374	**6113274**	125
6419647	**6113280**	118
6419661	**6113282**	118
6418381	**6113284**	127
	/m	
6419685	**6113290**	116
	/pc.	
6419814	**6113300**	117
6419821	**6113302**	117
6418411	**6113304**	126
6419845	**6113310**	115
6419869	**6113312**	115
6418398	**6113314**	124
6419876	**6113320**	117
6419883	**6113322**	117
6418428	**6113324**	126
	/m	
6419913	**6113400**	118
6419920	**6113402**	118
	/pc.	
6419937	**6113410**	119
6419944	**6113412**	119
6419975	**6113420**	119
6419982	**6113422**	119
6418565	**6113424**	128
6419999	**6113430**	119
6420001	**6113432**	119
6420032	**6113440**	119
6420049	**6113442**	119
6418602	**6113444**	128
6420056	**6113450**	119
6420063	**6113452**	119
6420094	**6113460**	119
6420100	**6113462**	119
6418633	**6113464**	128
6420117	**6113470**	120
6420124	**6113472**	120
6418657	**6113474**	129
6420155	**6113480**	120
6420162	**6113482**	120
6418664	**6113484**	129
	/m	
6450824	**6114200**	139
6450831	**6114210**	139
	/pc.	
6450848	**6114220**	139
6450893	**6114230**	139
6450909	**6114240**	140
6450930	**6114250**	140
6451012	**6114260**	140
6451111	**6114270**	140
6451166	**6114280**	140
	/m	
6451173	**6114290**	140
6451180	**6114300**	141
	/pc.	
6451197	**6114320**	141
6451241	**6114340**	141
6451296	**6114360**	142
6451319	**6114370**	142
6451364	**6114380**	142
5438069	**6117190**	199
5483540	**6117191**	199
5438090	**6117192**	199
5483571	**6117193**	199
6235155	**6117325**	178
6235216	**6117329**	178
6235278	**6117337**	178
6235339	**6117341**	178
5402428	**6117343**	397
5402435	**6117345**	397
5887515	**6117346**	178
5402442	**6117347**	222
5887522	**6117348**	178
5402459	**6117349**	397
6117499	**6117406**	194
5701279	**6117407**	194
6214037	**6117408**	194
6164813	**6117410**	194
6164820	**6117411**	194
6164851	**6117412**	194
6117550	**6117414**	194

GTIN	Art. no.	Page
	/pc.	
5701286	**6117415**	194
6215652	**6117416**	194
6133833	**6117420**	194
6133840	**6117421**	194
6133857	**6117422**	194
5696896	**6119202**	179
5696902	**6119204**	179
5696940	**6119206**	179
5696957	**6119208**	179
5696964	**6119210**	179
5696971	**6119212**	179
5696988	**6119214**	177
5696995	**6119216**	177
5697008	**6119218**	177
5697015	**6119220**	181
5697022	**6119222**	181
5697039	**6119224**	181
5697046	**6119226**	182
5697053	**6119228**	182
5697060	**6119230**	182
5697077	**6119232**	181
5697084	**6119234**	181
5697121	**6119236**	181
5697138	**6119238**	179
5697145	**6119240**	179
5697183	**6119242**	179
5697190	**6119244**	179
5697206	**6119246**	179
5697244	**6119248**	179
5697251	**6119250**	177
5697268	**6119252**	177
5697305	**6119254**	177
5697312	**6119256**	181
5697329	**6119258**	181
5697374	**6119260**	181
5697381	**6119262**	182
5697428	**6119264**	182
5697435	**6119266**	182
5697442	**6119268**	181
5697480	**6119270**	181
5697497	**6119272**	181
5887331	**6119280**	180
5887348	**6119282**	180
5887379	**6119284**	180
5887386	**6119286**	181
5887393	**6119288**	181
5887409	**6119290**	181
5887430	**6119292**	177
5887447	**6119294**	177
5887454	**6119296**	177
5888024	**6119298**	177
5887492	**6119300**	177
5887508	**6119302**	177
5925491	**6119304**	182
5925507	**6119306**	182
5925538	**6119308**	182
5887789	**6119322**	173
5888796	**6119324**	173
5888802	**6119326**	173
5888819	**6119332**	173
5888826	**6119334**	173
5888833	**6119336**	173
5896791	**6119338**	173
5896807	**6119339**	173
5896814	**6119340**	173
5888840	**6119342**	174
5888871	**6119344**	174
5888888	**6119346**	174
5888895	**6119352**	174
5888901	**6119354**	174
5888932	**6119356**	174
5888949	**6119362**	174
5888956	**6119364**	174
5888963	**6119366**	174
5888994	**6119372**	174
5889007	**6119374**	174
5889014	**6119376**	174
5889021	**6119382**	175
5889038	**6119384**	175
5889045	**6119386**	175
5983309	**6119387**	175
5983316	**6119388**	175
5983323	**6119389**	175

GTIN	Art. no.	Page
	/pc.	
6609963	**6119483**	159
6609994	**6119485**	160
6049134	**6120001**	193
6049127	**6120003**	193
6049189	**6120005**	193
6046966	**6120008**	194
6046973	**6120010**	194
6047024	**6120012**	194
6047031	**6120014**	194
6047086	**6120016**	194
6047093	**6120018**	194
6047109	**6120022**	195
6047130	**6120024**	195
6047147	**6120026**	195
6047154	**6120028**	195
6047208	**6120030**	195
6047222	**6120032**	195
6047260	**6120042**	195
6047277	**6120044**	195
6047321	**6120046**	195
6047345	**6120048**	195
6047383	**6120050**	195
6047390	**6120052**	195
6047444	**6120072**	196
6047468	**6120074**	196
6047505	**6120076**	196
6047512	**6120078**	196
6047529	**6120080**	196
6047567	**6120082**	196
6047574	**6120102**	196
6047581	**6120104**	196
6047628	**6120106**	196
6047635	**6120108**	196
6047680	**6120110**	196
6047703	**6120112**	196
6047864	**6120122**	196
6047871	**6120124**	196
6047925	**6120126**	196
6047949	**6120128**	196
6047987	**6120130**	196
6047994	**6120132**	196
6048045	**6120152**	197
6048052	**6120154**	197
6048069	**6120155**	197
6048113	**6120158**	197
6048168	**6120160**	197
6048175	**6120162**	197
6048182	**6120172**	197
6048229	**6120174**	197
6048236	**6120176**	197
6048243	**6120178**	197
6048281	**6120180**	197
6048298	**6120182**	197
6048304	**6120192**	197
6048342	**6120194**	197
6048359	**6120196**	197
6048366	**6120198**	197
6048397	**6120200**	197
6048403	**6120201**	197
6048540	**6120222**	198
6048649	**6120224**	198
6048700	**6120226**	198
6048717	**6120228**	198
6048724	**6120230**	198
6048762	**6120232**	198
6048786	**6120242**	198
6048823	**6120244**	198
6048847	**6120246**	198
6048885	**6120248**	198
6048892	**6120250**	198
6048946	**6120252**	198
6048953	**6120262**	198
6048991	**6120264**	198
6049004	**6120266**	198
6049011	**6120268**	198
6049028	**6120270**	198
6049066	**6120272**	198
6049073	**6120292**	195
6049141	**6120294**	195
6049196	**6120296**	195
6049240	**6120302**	196
6049257	**6120304**	196
6049264	**6120306**	197

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

GTIN	Art. no.	Page
	/pc.	
6049301	**6120312**	197
6049318	**6120314**	198
6049363	**6120316**	198
6049424	**6120322**	199
6049493	**6120324**	199
6049547	**6120326**	199
6049387	**6120340**	203
6049431	**6120344**	203
6049486	**6120346**	203
6049509	**6120348**	203
6049554	**6120350**	203
6049608	**6120352**	203
6049615	**6120362**	203
6049622	**6120364**	203
6049660	**6120366**	203
6049677	**6120368**	203
6049721	**6120370**	203
6049738	**6120372**	203
6049745	**6120382**	203
6049783	**6120384**	203
6049790	**6120386**	203
6049974	**6120388**	203
6050024	**6120390**	203
6050031	**6120392**	203
6050154	**6120412**	203
6050208	**6120414**	203
6050222	**6120416**	203
6050253	**6120418**	203
6050260	**6120420**	203
6050277	**6120422**	203
6050314	**6120432**	204
6050321	**6120434**	204
6050345	**6120436**	204
6050376	**6120438**	204
6050383	**6120440**	204
6050390	**6120442**	204
6050437	**6120452**	204
6050444	**6120454**	204
6050468	**6120456**	204
6050499	**6120458**	204
6050505	**6120460**	204
6050512	**6120462**	204
6050550	**6120482**	204
6050567	**6120484**	204
6050581	**6120486**	204
6050611	**6120488**	204
6050628	**6120490**	204
6050635	**6120492**	204
6050673	**6120502**	204
6050680	**6120504**	204
6050703	**6120506**	204
6050734	**6120508**	204
6050741	**6120510**	204
6050758	**6120512**	204
6050796	**6120532**	205
6050802	**6120534**	205
6050819	**6120536**	205
6050826	**6120538**	205
6050857	**6120540**	205
6050864	**6120542**	205
6050871	**6120552**	205
6050918	**6120554**	205
6050925	**6120556**	205
6050949	**6120558**	205
6050970	**6120560**	205
6050987	**6120562**	205
6050994	**6120572**	205
6051038	**6120574**	205
6051045	**6120576**	205
6051052	**6120578**	205
6051069	**6120580**	205
6051090	**6120582**	205
6051335	**6120602**	205
6051342	**6120604**	205
6051359	**6120606**	205
6051397	**6120608**	205
6051403	**6120610**	205
6051427	**6120612**	205
6051458	**6120622**	206
6051465	**6120624**	206
6051472	**6120626**	206
6051519	**6120628**	206
6051526	**6120630**	206
6051540	**6120632**	206

GTIN	Art. no.	Page
	/pc.	
6051571	**6120642**	206
6051588	**6120644**	206
6051595	**6120646**	206
6051632	**6120648**	206
6051649	**6120650**	206
6051663	**6120652**	206
6048410	**6120672**	206
6048427	**6120674**	206
6048465	**6120676**	206
6048472	**6120678**	206
6048489	**6120680**	206
6048526	**6120682**	206
6048533	**6120692**	206
6048588	**6120694**	206
6048595	**6120696**	206
6048601	**6120698**	206
6048656	**6120700**	206
6048663	**6120702**	206
6571116	**6120810**	263
6571161	**6120832**	263
6571178	**6120834**	263
6571185	**6120836**	263
6571192	**6120850**	264
6571246	**6120872**	264
6571253	**6120874**	264
6571260	**6120876**	264
	/pc.	
6570805	**6120920**	175
6570812	**6120922**	175
6570829	**6120924**	175
6570836	**6120926**	175
6570843	**6120928**	175
6570850	**6120930**	175
6570867	**6120932**	175
6570874	**6120934**	175
6570881	**6120936**	175
6570898	**6120938**	176
6570911	**6120940**	176
6570928	**6120942**	176
6570935	**6120950**	176
6570942	**6120952**	176
6570959	**6120954**	176
6570966	**6120960**	176
6571000	**6120962**	176
6571017	**6120964**	176
6571024	**6120966**	176
6571031	**6120968**	176
6571048	**6120970**	176
6571055	**6120980**	176
6571062	**6120982**	176
6571079	**6120984**	176
6594702	**6120992**	176
	/m	
6097579	**6150152**	24
6097630	**6150160**	24
6097692	**6150179**	24
6097753	**6150187**	24
6493159	**6150268**	24
6493098	**6150276**	24
6493036	**6150284**	24
6492978	**6150292**	24
6098170	**6150756**	24
6492251	**6150764**	24
6491773	**6150780**	26
	/pc.	
6098293	**6152007**	24
6507610	**6152031**	27
6098477	**6152058**	28
6098712	**6152309**	25
6099139	**6152600**	25
6099559	**6153003**	25
6099979	**6153291**	25
6100392	**6153593**	25
6492138	**6154026**	24
6491957	**6154115**	25
6491476	**6154123**	26
6493272	**6154166**	32
6491896	**6154212**	25
6491414	**6154220**	26
6493333	**6154255**	32

GTIN	Art. no.	Page
	/pc.	
6492077	**6154328**	25
6491599	**6154336**	26
6974542	**6154360**	32
6492015	**6154417**	25
6493210	**6154468**	32
6491834	**6154514**	25
6491353	**6154522**	26
6493395	**6154557**	32
6577576	**6158226**	30
6577750	**6158234**	27
6577934	**6158242**	29
6578115	**6158250**	33
6578290	**6158269**	34
6578658	**6158285**	35
6578832	**6158293**	37
6578955	**6158331**	30
6579136	**6158358**	27
6579310	**6158366**	29
6579495	**6158374**	33
6579679	**6158382**	34
6580033	**6158404**	35
6580217	**6158412**	37
6580392	**6158455**	30
6580576	**6158463**	28
6580750	**6158471**	29
6580934	**6158498**	33
6581115	**6158501**	35
6581474	**6158536**	36
6581658	**6158544**	37
6581832	**6158587**	30
6582013	**6158595**	28
6582198	**6158609**	29
6582372	**6158617**	33
6582556	**6158625**	34
6582914	**6158641**	36
6583096	**6158668**	37
6642618	**6158692**	27
6434473	**6158706**	31
6434534	**6158714**	28
6434596	**6158722**	29
6434657	**6158730**	33
6434718	**6158749**	35
6584178	**6158765**	36
6583270	**6158773**	38
6643158	**6158781**	31
6434831	**6158803**	36
6507559	**6158838**	27
6507498	**6158846**	28
6577637	**6160018**	30
6577811	**6160026**	27
6577996	**6160034**	29
6578177	**6160042**	33
6578351	**6160050**	34
6578719	**6160077**	35
6584598	**6160093**	37
6105915	**6160107**	38
6105977	**6160115**	40
6106035	**6160123**	41
6106271	**6160301**	43
6106332	**6160328**	44
6106394	**6160336**	46
6106455	**6160344**	47
6106516	**6160352**	50
6106578	**6160360**	52
6638178	**6160379**	49
6639557	**6160395**	53
6106639	**6160484**	55
6106691	**6160492**	56
6106752	**6160522**	57
6502035	**6160549**	59
6579013	**6160603**	30
6579198	**6160611**	27
6579372	**6160638**	29
6579556	**6160646**	33
6579730	**6160654**	34
6580095	**6160670**	35
6580279	**6160697**	37
6106813	**6160700**	38
6106875	**6160719**	40
6106936	**6160727**	41
6107179	**6160905**	43
6107230	**6160913**	45

GTIN	Art. no.	Page
	/pc.	
6107292	**6160921**	46
6107353	**6160948**	48
6107414	**6160956**	51
6107476	**6160964**	52
6638352	**6160972**	49
6639731	**6160980**	54
6107537	**6161103**	55
6107599	**6161111**	56
6107650	**6161154**	58
6501854	**6161170**	59
6581894	**6161200**	30
6582075	**6161219**	28
6582259	**6161227**	29
6582433	**6161235**	33
6582617	**6161243**	34
6582976	**6161278**	36
6583157	**6161294**	37
6107711	**6161308**	39
6107773	**6161316**	40
6107834	**6161324**	42
6108077	**6161502**	43
6108138	**6161510**	45
6108190	**6161529**	47
6108251	**6161537**	48
6108312	**6161545**	51
6108374	**6161553**	53
6638536	**6161561**	50
6639915	**6161596**	54
6108435	**6161707**	55
6108497	**6161715**	57
6108558	**6161758**	58
6501250	**6161774**	59
6580453	**6161901**	30
6580637	**6161928**	28
6580811	**6161936**	29
6580996	**6161944**	33
6581177	**6161952**	35
6581535	**6161979**	36
6581719	**6161995**	37
6108619	**6162002**	39
6108671	**6162010**	40
6108732	**6162029**	42
6108978	**6162207**	43
6109036	**6162215**	45
6109098	**6162223**	46
6109159	**6162231**	48
6109210	**6162258**	51
6109272	**6162266**	52
6638710	**6162274**	49
6640096	**6162290**	54
6109333	**6162401**	55
6109395	**6162428**	57
6109456	**6162452**	58
6501618	**6162479**	59
6643219	**6162487**	31
6642670	**6162495**	27
6583454	**6162509**	31
6583577	**6162517**	28
6583690	**6162525**	29
6583812	**6162533**	33
6583935	**6162541**	35
6584239	**6162576**	36
6641239	**6162584**	36
6583331	**6162592**	38
6109517	**6162606**	39
6109579	**6162614**	41
6109630	**6162622**	42
6109876	**6162800**	44
6109937	**6162819**	45
6109999	**6162827**	47
6110056	**6162835**	48
6110117	**6162843**	51
6110179	**6162851**	53
6637997	**6162878**	50
6639373	**6162886**	54
6110230	**6163009**	56
6110292	**6163017**	57
6110353	**6163041**	58
6651436	**6163076**	60

GTIN	Art. no.	Page
	/m	
6438433	**6168701**	31
6801671	**6168736**	31
6802159	**6168744**	31
	/pc.	
6111619	**6169309**	61
6111855	**6169376**	61
6112098	**6169430**	61
	/m	
5933779	**6175375**	67
5933953	**6175390**	67
5812456	**6175400**	68
5812463	**6175405**	69
5812470	**6175410**	70
5812487	**6175415**	71
5812494	**6175420**	72
5812500	**6175425**	74
5933977	**6175457**	67
5817789	**6175460**	68
5817796	**6175463**	69
5817802	**6175466**	70
5817833	**6175469**	71
5817840	**6175472**	72
5817857	**6175475**	74
5812517	**6175500**	75
5812524	**6175504**	75
	/pc.	
5934233	**6175546**	68
5813910	**6175550**	69
5813927	**6175554**	70
5813934	**6175558**	71
5813941	**6175562**	72
5813958	**6175566**	73
5813965	**6175570**	74
5934073	**6175578**	67
5922780	**6175581**	68
5814016	**6175590**	69
5814023	**6175594**	70
5814030	**6175598**	72
5814047	**6175602**	73
5814054	**6175606**	74
5934127	**6175618**	67
5922841	**6175624**	68
5814061	**6175626**	69
5814078	**6175630**	71
5814085	**6175634**	72
5814092	**6175638**	73
5814108	**6175642**	74
5934158	**6175654**	67
5922896	**6175658**	68
5814115	**6175662**	70
5814122	**6175666**	71
5814139	**6175670**	72
5814146	**6175674**	73
5814153	**6175678**	74
5934189	**6175690**	67
5922926	**6175694**	69
5814160	**6175698**	70
5814177	**6175702**	71
5814191	**6175710**	73
5814207	**6175714**	74
5814597	**6175928**	69
5814603	**6175932**	70
5814610	**6175936**	71
5814627	**6175940**	72
5814863	**6175944**	73
5814870	**6175948**	74
5922803	**6175964**	68
5814887	**6175968**	69
5814894	**6175972**	70
5814900	**6175976**	72
5814917	**6175980**	73
5814924	**6175984**	74
5922865	**6176000**	68
5814955	**6176004**	69
5814962	**6176008**	71
5814979	**6176012**	72
5814986	**6176016**	73
5815020	**6176020**	74
5922919	**6176036**	68
5815037	**6176040**	70
5815044	**6176044**	71

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

GTIN	Art. no.	Page
	/pc.	
5815075	**6176048**	72
5815082	**6176052**	73
5815099	**6176056**	74
5922971	**6176072**	69
5815105	**6176076**	70
5815112	**6176080**	71
5815136	**6176088**	73
5815143	**6176092**	74
	/100 pc.	
5817864	**6176122**	75
5817895	**6176125**	75
5817901	**6176128**	75
5817918	**6176131**	75
	/m	
6000050	**6178001**	84
6000173	**6178003**	84
6000296	**6178005**	84
6000418	**6178010**	84
6000531	**6178012**	85
6000654	**6178014**	85
6000777	**6178016**	85
6000890	**6178018**	86
6001132	**6178026**	86
6001255	**6178028**	86
6001378	**6178031**	86
6001491	**6178033**	87
6001613	**6178035**	87
6001736	**6178037**	87
6001859	**6178039**	88
6002214	**6178050**	88
6002337	**6178052**	88
6002450	**6178054**	89
6002573	**6178056**	89
6002696	**6178059**	89
6002818	**6178061**	90
	/100 pc.	
6008339	**6178092**	102
	/m	
6004973	**6178203**	90
6005093	**6178205**	90
6005215	**6178207**	91
6005307	**6178209**	91
6005406	**6178211**	91
6005505	**6178213**	92
6005802	**6178225**	92
6005932	**6178227**	92
6006052	**6178229**	93
6006175	**6178231**	93
6006298	**6178233**	93
6006410	**6178236**	94
6009411	**6178302**	94
6009534	**6178305**	94
6009657	**6178307**	95
6009732	**6178310**	95
6009831	**6178312**	95
6009930	**6178314**	96
6010073	**6178316**	96
6010196	**6178320**	96
6010318	**6178322**	97
6010400	**6178324**	97
6010509	**6178326**	97
6010608	**6178328**	98
6010707	**6178330**	98
6011049	**6178338**	99
6011162	**6178341**	99
6013432	**6178424**	100
6013555	**6178426**	100
6013678	**6178428**	100
6013791	**6178430**	101
6013913	**6178435**	101
6014033	**6178437**	101
6014156	**6178439**	102
6015184	**6178441**	102
6040322	**6178482**	84
6040445	**6178484**	85
6040568	**6178486**	85
6040681	**6178488**	85
6040803	**6178490**	86
6040926	**6178492**	88
6041282	**6178504**	94
6041404	**6178506**	95
6041527	**6178508**	96
6041640	**6178510**	96

GTIN	Art. no.	Page
	/m	
6041763	**6178512**	98
6041886	**6178514**	98
	/100 pc.	
6014279	**6178520**	103
6337057	**6178525**	103
	/pc.	
6014514	**6178527**	103
6014637	**6178529**	103
	/100 pc.	
6014873	**6178540**	104
6014996	**6178542**	104
	/m	
5803751	**6178552**	108
5803768	**6178556**	108
5803799	**6178559**	108
5803805	**6178563**	109
5803812	**6178566**	109
5803744	**6178582**	107
5803829	**6178585**	107
5803836	**6178588**	107
5981459	**6178670**	107
5981466	**6178674**	107
5981473	**6178678**	107
5981480	**6178682**	109
	/pc.	
6674657	**6182011**	30
6674770	**6182097**	35
6674893	**6182119**	37
6674954	**6182127**	38
6675012	**6182135**	40
6675074	**6182143**	41
6675739	**6182194**	43
6675791	**6182208**	44
6675852	**6182216**	46
6675913	**6182224**	47
6675975	**6182232**	49
6676033	**6182240**	50
6676095	**6182259**	52
6676156	**6182267**	53
6676217	**6182305**	55
6676279	**6182313**	56
6676330	**6182348**	57
6501977	**6182364**	59
6675197	**6182402**	30
6675319	**6182488**	35
6675432	**6182526**	37
6675494	**6182534**	38
6675555	**6182542**	40
6675616	**6182550**	41
6676392	**6182593**	43
6676453	**6182607**	45
6676514	**6182615**	46
6676576	**6182623**	48
6676637	**6182631**	49
6676699	**6182658**	51
6676750	**6182666**	52
6676811	**6182674**	54
6676873	**6182712**	55
6676934	**6182720**	56
6676996	**6182747**	58
6501793	**6182763**	59
6672851	**6182801**	30
6672974	**6182887**	36
6673094	**6182917**	37
6673155	**6182925**	39
6673216	**6182933**	40
6673278	**6182941**	42
6677054	**6183018**	43
6677115	**6183026**	45
6677177	**6183034**	46
6677238	**6183042**	48
6677290	**6183050**	49
6677351	**6183069**	51
6677412	**6183077**	52
6677474	**6183085**	54
6677535	**6183123**	55
6677597	**6183131**	57
6677658	**6183166**	58
6501373	**6183182**	59
6673391	**6183212**	30
6673513	**6183298**	36
6673636	**6183336**	37

GTIN	Art. no.	Page
	/pc.	
6673698	**6183344**	39
6673759	**6183352**	40
6673810	**6183360**	42
6677719	**6183409**	43
6677771	**6183417**	45
6677832	**6183425**	47
6677894	**6183433**	48
6677955	**6183441**	50
6678013	**6183468**	51
6678075	**6183476**	53
6678136	**6183484**	54
6678198	**6183522**	55
6678259	**6183530**	57
6678310	**6183557**	58
6222131	**6183573**	59
6673933	**6183603**	27
6673995	**6183611**	31
6674053	**6183654**	31
6674176	**6183697**	36
6674237	**6183700**	36
6674299	**6183727**	38
6674350	**6183735**	39
6674411	**6183743**	41
6674473	**6183751**	42
6678372	**6183808**	44
6678433	**6183816**	45
6678495	**6183824**	47
6678556	**6183832**	48
6678617	**6183840**	50
6678679	**6183859**	51
6678730	**6183867**	53
6678792	**6183875**	54
6678853	**6183913**	56
6678914	**6183921**	57
6678976	**6183956**	58
6679034	**6183980**	60
	/m	
6794058	**6191002**	26
6794119	**6191010**	27
6494590	**6191029**	28
6794171	**6191037**	30
6496938	**6191045**	31
6505036	**6191053**	32
6794232	**6191061**	34
6794294	**6191096**	35
6497058	**6191118**	36
6363490	**6191126**	37
6794355	**6191134**	38
6794416	**6191142**	39
6501199	**6191150**	41
6363018	**6191193**	42
6491292	**6191207**	44
6363438	**6191215**	46
6363377	**6191223**	47
6491230	**6191231**	49
6363193	**6191258**	50
6794478	**6191266**	52
6799459	**6191274**	53
6635696	**6191275**	53
	/m	
5042273	**6191304**	55
5042280	**6191312**	56
5042297	**6191347**	57
5042303	**6191355**	58
6635641	**6191356**	58
	/m	
6502936	**6191568**	62
6502752	**6191592**	62
6502578	**6191657**	63
6502516	**6191673**	63
6502394	**6191738**	63
	/pc.	
6794652	**6191843**	27
6494651	**6191851**	29
6794713	**6191878**	30
6794775	**6191894**	34
6794836	**6191924**	35
6794898	**6191940**	37
6794959	**6191959**	38
6795017	**6191967**	40
6221110	**6191975**	41
6362950	**6192017**	43

GTIN	Art. no.	Page
	/pc.	
6799879	**6192025**	44
6362776	**6192033**	46
6362479	**6192041**	47
6800056	**6192068**	49
6362233	**6192076**	50
6795079	**6192084**	52
6800896	**6192092**	53
5042457	**6192106**	55
5042525	**6192110**	56
5042594	**6192114**	57
5042662	**6192118**	59
6795253	**6192149**	27
6494712	**6192157**	29
6795314	**6192165**	30
6795376	**6192181**	34
6795437	**6192211**	35
6795499	**6192246**	37
6795550	**6192254**	38
6795611	**6192262**	40
6220878	**6192270**	41
6360970	**6192319**	43
6801558	**6192327**	45
6354559	**6192335**	46
6353057	**6192343**	48
6492312	**6192351**	49
6351855	**6192378**	51
6795673	**6192386**	52
6492374	**6192394**	54
5042464	**6192416**	55
5042532	**6192420**	56
5042600	**6192424**	58
5042693	**6192428**	59
6796212	**6192459**	28
6494774	**6192467**	29
6796274	**6192475**	30
6796335	**6192491**	35
6796397	**6192513**	36
6796458	**6192548**	37
6796519	**6192556**	39
6796571	**6192564**	40
6500833	**6192572**	42
6351794	**6192610**	43
6492435	**6192629**	45
6712519	**6192637**	46
6712571	**6192645**	48
6492497	**6192653**	49
6712632	**6192661**	51
6796632	**6192688**	52
6492558	**6192696**	54
5042471	**6192718**	55
5042549	**6192722**	57
5042631	**6192726**	58
5042709	**6192730**	59
6796694	**6192750**	28
6494835	**6192769**	29
6796755	**6192777**	30
6796816	**6192793**	34
6796878	**6192815**	36
6796939	**6192831**	37
6796991	**6192858**	39
6797059	**6192866**	40
6496990	**6192874**	42
6712694	**6192912**	43
6492619	**6192920**	45
6712755	**6192939**	47
6712816	**6192947**	48
6492671	**6192955**	50
6712878	**6192963**	51
6797110	**6192971**	53
6492732	**6192998**	54
5042488	**6193021**	55
5042570	**6193025**	57
5042648	**6193029**	58
5042716	**6193033**	59
6797172	**6193099**	27
6797233	**6193102**	28
6975624	**6193110**	29
6797295	**6193129**	31
6976768	**6193137**	31
6797356	**6193153**	35
6797417	**6193188**	36
6497355	**6193196**	36
6712939	**6193218**	38

GTIN	Art. no.	Page
	/pc.	
6797479	**6193226**	39
6797530	**6193234**	41
6974788	**6193242**	42
6712991	**6193285**	44
6492794	**6193293**	45
6713059	**6193307**	47
6713110	**6193315**	48
6492855	**6193323**	50
6713172	**6193331**	51
6797592	**6193358**	53
6492916	**6193366**	54
5042518	**6193387**	56
5042587	**6193391**	57
5042655	**6193395**	58
5042723	**6193399**	60
6223695	**6193501**	27
6975266	**6193528**	28
6507313	**6193560**	34
5461814	**6193580**	39
5462170	**6193582**	39
5461821	**6193586**	41
5462187	**6193588**	41
5461838	**6193590**	44
5462217	**6193592**	44
5461845	**6193596**	46
5462224	**6193598**	46
6448272	**6194036**	61
6628636	**6194109**	61
6628339	**6194184**	61
	/m	
6118878	**6246974**	78
6312139	**6247113**	78
	/pc.	
5846406	**6274211**	132
5846413	**6274212**	132
5846581	**6274221**	133
5846598	**6274222**	133
5846482	**6274241**	133
5846512	**6274282**	133
	/m	
5655473	**6274300**	132
5656333	**6274301**	132
5656340	**6274302**	132
5656371	**6274306**	132
	/pc.	
5656401	**6274310**	132
5656432	**6274311**	132
5656449	**6274312**	132
5656456	**6274316**	132
5655664	**6274320**	133
5656463	**6274321**	133
5656494	**6274322**	133
5656500	**6274326**	133
5656517	**6274340**	133
5656524	**6274341**	133
5656555	**6274342**	133
5656562	**6274346**	133
5656579	**6274360**	133
5656586	**6274361**	133
5656616	**6274362**	133
5656623	**6274366**	133
5656630	**6274370**	134
5656647	**6274371**	134
5656678	**6274372**	134
5842705	**6274374**	146
5656685	**6274376**	134
5846819	**6274420**	134
5656715	**6274492**	133
	/m	
5656739	**6274500**	134
	/pc.	
5656838	**6274520**	135
5656876	**6274540**	135
5656913	**6274560**	135
5656951	**6274570**	135
	/VPE	
5657033	**6274650**	132
	/m	
5657040	**6274700**	135

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

GTIN	Art. no.	Page
	/pc.	
5657101	**6274710**	136
5657149	**6274720**	136
5657187	**6274740**	136
5657224	**6274760**	136
5657262	**6274770**	137
	/m	
5658122	**6274900**	134
5897071	**6276900**	147
5897064	**6276903**	147
	/pc.	
5897095	**6276910**	147
5897088	**6276913**	147
5897118	**6276920**	148
5897101	**6276923**	148
5897156	**6276940**	148
5897125	**6276943**	148
5897170	**6276960**	149
5897163	**6276963**	149
5897224	**6276970**	149
5897187	**6276973**	149
	/m	
5666400	**6278680**	132
5666547	**6278781**	132
5666554	**6278782**	132
5842552	**6279100**	150
5842545	**6279103**	150
	/pc.	
5842590	**6279110**	150
5842583	**6279113**	150
5842620	**6279121**	150
5842613	**6279123**	150
5842651	**6279140**	151
5842644	**6279143**	151
5842682	**6279160**	151
5842675	**6279163**	151
	/m	
5768050	**6279200**	145
5768067	**6279203**	145
	/pc.	
5768111	**6279210**	145
5768128	**6279213**	145
5768166	**6279220**	145
5768173	**6279223**	145
5768210	**6279240**	146
5768227	**6279243**	146
5768241	**6279260**	146
5768289	**6279263**	146
5768302	**6279270**	146
5768340	**6279273**	146
	/m	
5768364	**6279300**	146
5768401	**6279303**	146
	/pc.	
5768456	**6279310**	147
5768463	**6279313**	147
5768487	**6279320**	148
5768524	**6279323**	148
5768548	**6279340**	148
5768579	**6279343**	148
5768593	**6279360**	149
5768609	**6279363**	149
5768654	**6279370**	149
5768661	**6279373**	149
	/m	
5768715	**6279400**	151
5768722	**6279403**	151
	/pc.	
5768784	**6279410**	152
5768821	**6279413**	152
5768845	**6279420**	152
5768876	**6279423**	152
5817925	**6279430**	152
5817956	**6279433**	152
5768890	**6279440**	153
5768906	**6279443**	153
5768951	**6279460**	153
5768968	**6279463**	153
5769002	**6279470**	151
5818885	**6279473**	151
	/m	
5769064	**6279500**	153

GTIN	Art. no.	Page
	/m	
5769071	**6279503**	153
	/pc.	
5769132	**6279510**	154
5769149	**6279513**	154
5769194	**6279520**	154
5769200	**6279523**	154
5817963	**6279530**	154
5817970	**6279533**	154
5769255	**6279540**	154
5769262	**6279543**	154
5769309	**6279560**	154
5769316	**6279563**	154
5769361	**6279570**	154
5769378	**6279573**	154
	/m	
5769491	**6279600**	155
5769507	**6279603**	155
	/pc.	
5769569	**6279610**	155
5769606	**6279613**	155
5769620	**6279620**	155
5769668	**6279623**	155
5769682	**6279640**	156
5769729	**6279643**	156
5769743	**6279660**	156
5769774	**6279663**	156
5769804	**6279670**	156
5769798	**6279673**	156
	/VPE	
5769989	**6279701**	145
5770022	**6279704**	147
	/m	
5770046	**6279714**	149
5770084	**6279720**	145
5770091	**6279723**	145
	/pc.	
5776147	**6279725**	145
5776154	**6279727**	145
5776161	**6279734**	146
5776192	**6279736**	146
5914990	**6288569**	159
5915003	**6288579**	159
5889083	**6288583**	159
5148715	**6288612**	242
6555543	**6288635**	159
5773863	**6289970**	164
5773870	**6289972**	164
5773887	**6289974**	166
5773924	**6289976**	166
5811787	**6289980**	166
5811794	**6289982**	166
5428091	**6290086**	163
5428107	**6290087**	163
5459095	**6290095**	164
5459101	**6290097**	164
5428152	**6290178**	163
5428169	**6290264**	163
5817017	**6290347**	165
5817024	**6290348**	165
5817055	**6290372**	165
5817079	**6290387**	165
6191468	**6290404**	168
6191451	**6290406**	169
6191499	**6290416**	169
6191505	**6290422**	170
6191512	**6290423**	170
6191529	**6290436**	169
6427451	**6290456**	170
6258659	**6290495**	170
5850120	**7202295**	462
5850182	**7202310**	462
5850199	**7202312**	463
5428190	**7202322**	462
6434459	**7202505**	461
6434466	**7202515**	462
5817499	**7203800**	461
	/VPE	
5817505	**7203803**	461

GTIN	Art. no.	Page
	/pc.	
6436347	**7203805**	461
5817536	**7203806**	461
5817543	**7203809**	461
5448259	**7205425**	462
5725695	**7205429**	462
5626817	**7368383**	390
5626824	**7368384**	389
5775850	**7368392**	390
5775959	**7368393**	390
5802617	**7368398**	391
5802624	**7368399**	393
5919322	**7368400**	389
6591824	**7368410**	395
6591831	**7368411**	390
	/m	
5089254	**7400300**	289
5089261	**7400304**	291
5089278	**7400308**	293
5089285	**7400312**	289
5089315	**7400316**	291
5089322	**7400320**	293
5089339	**7400324**	289
5089346	**7400328**	291
5089377	**7400332**	293
5089384	**7400336**	289
5089391	**7400340**	291
5089407	**7400344**	293
	/pc.	
5729761	**7400348**	305
5729778	**7400349**	307
5729785	**7400350**	305
5729815	**7400351**	307
5729822	**7400352**	305
5729839	**7400353**	307
5729846	**7400354**	305
5729853	**7400355**	307
5729884	**7400358**	305
5729891	**7400359**	308
5434856	**7400431**	301
5431220	**7400455**	298
5431251	**7400459**	298
5431268	**7400463**	298
5431275	**7400467**	298
5431282	**7400471**	298
5431381	**7400501**	299
5620938	**7400502**	299
5431398	**7400505**	301
5431404	**7400509**	302
5431435	**7400513**	302
5431442	**7400517**	301
5431503	**7400533**	302
5431565	**7400549**	302
5434900	**7400559**	303
5431572	**7400573**	297
5431589	**7400577**	301
5090304	**7400620**	290
5090335	**7400624**	292
5090342	**7400628**	294
5090359	**7400632**	290
5090366	**7400636**	292
5090397	**7400640**	294
5090403	**7400644**	290
5090410	**7400648**	292
5090427	**7400652**	294
5090458	**7400656**	290
5090465	**7400660**	292
5090472	**7400664**	294
5090588	**7400692**	325
5432845	**7400960**	289
5432883	**7400962**	291
5432890	**7400964**	293
5432906	**7400966**	289
5432944	**7400968**	291
5432951	**7400970**	293
5432968	**7400972**	289
5433002	**7400974**	291
5433019	**7400976**	293
5433026	**7400980**	290
6539000	**7401404**	379
6539017	**7401406**	380

GTIN	Art. no.	Page
	/pc.	
6539024	**7401408**	381
6539031	**7401410**	382
6539048	**7401412**	383
6539055	**7401414**	384
6539062	**7401416**	385
5093510	**7401870**	322
5093602	**7401898**	322
5093640	**7401904**	322
5093664	**7401912**	322
5093701	**7401920**	322
	/m	
5093817	**7401960**	320
5093831	**7401968**	320
5093879	**7401976**	320
5093886	**7401980**	320
5093893	**7401984**	320
5093909	**7401988**	320
5093930	**7401992**	320
5093947	**7401996**	320
	/pc.	
5093954	**7401997**	322
	/m	
5093992	**7402000**	320
5094005	**7402004**	320
5094012	**7402008**	320
	/pc.	
5094067	**7402040**	322
5094081	**7402048**	322
5094128	**7402056**	322
5094142	**7402064**	323
5094173	**7402068**	323
	/m	
5845935	**7403816**	328
5862079	**7403818**	328
	/pc.	
5699569	**7403820**	328
5845973	**7403826**	328
5845980	**7403831**	328
5699699	**7403850**	329
5699705	**7403855**	329
5098829	**7403980**	290
5098850	**7403984**	292
5098867	**7403988**	294
5098874	**7404002**	290
5098881	**7404006**	292
5098911	**7404010**	294
5098928	**7404014**	290
5098935	**7404018**	292
5098942	**7404022**	294
	/m	
5099338	**7404220**	322
6633944	**7404382**	372
	/pc.	
5099895	**7404408**	458
5099901	**7404412**	458
6557516	**7404660**	261
6557523	**7404662**	261
6557554	**7404664**	261
6557561	**7404670**	261
6557578	**7404672**	262
6557585	**7404674**	261
6557615	**7404676**	262
6557622	**7404678**	262
6557646	**7404680**	261
6557639	**7404682**	262
6557677	**7404684**	262
6557684	**7404686**	262
6557691	**7404688**	263
5674436	**7405037**	334
5674443	**7405039**	334
5674450	**7405047**	334
5674467	**7405049**	334
6460496	**7405077**	348
6460502	**7405079**	348
6460533	**7405081**	348
6459582	**7405082**	411
6460540	**7405083**	348
6459599	**7405084**	411
6460557	**7405085**	348
6459605	**7405086**	411

GTIN	Art. no.	Page
	/pc.	
6460564	**7405087**	348
6459643	**7405088**	411
6490608	**7405097**	349
5102113	**7405100**	346
5102120	**7405104**	346
5102168	**7405108**	346
5102182	**7405116**	346
5102229	**7405120**	346
5102236	**7405124**	346
6514922	**7405131**	354
5890645	**7405145**	346
5890676	**7405146**	346
5890683	**7405147**	346
6028726	**7405191**	347
5102588	**7405196**	346
5102595	**7405200**	346
5102601	**7405204**	346
6028733	**7405299**	348
5103080	**7405308**	347
5103110	**7405312**	347
5103127	**7405316**	347
5883616	**7405321**	347
5883623	**7405322**	347
5883630	**7405323**	347
6028740	**7405371**	348
5103684	**7405436**	351
5103721	**7405440**	351
5103738	**7405444**	351
5103783	**7405452**	351
5103790	**7405456**	351
5103806	**7405460**	351
5840718	**7405465**	352
5840725	**7405466**	352
5840763	**7405467**	352
5103929	**7405482**	353
5104094	**7405512**	352
5104100	**7405516**	352
5104148	**7405520**	352
5104162	**7405528**	352
5104209	**7405532**	352
5104216	**7405536**	352
6581634	**7405743**	353
5866985	**7405746**	353
5866992	**7405750**	353
5867005	**7405754**	353
	/VPE	
5891185	**7405814**	329
5891215	**7405815**	329
5891222	**7405816**	329
5891239	**7405817**	329
5891246	**7405818**	329
5891253	**7405819**	329
	/pc.	
5105824	**7405892**	376
5105831	**7405896**	376
5105848	**7405900**	376
5105886	**7405908**	376
5105893	**7405912**	378
5105909	**7405916**	378
5105930	**7405920**	378
5105954	**7405928**	378
5105961	**7405932**	376
5105992	**7405936**	376
5106005	**7405940**	376
5938729	**7405941**	376
5106029	**7405948**	376
5106050	**7405952**	378
5106067	**7405956**	378
5106074	**7405960**	378
5106111	**7405968**	378
5651116	**7406603**	380
5870265	**7406672**	325
5870272	**7406674**	349
5870289	**7406676**	349
5903277	**7406701**	347
5903284	**7406702**	347
5903291	**7406703**	347
5901129	**7406749**	348
5901136	**7406750**	348
5901143	**7406751**	348
5109549	**7406772**	351
5109556	**7406776**	351
5109563	**7406780**	351

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

GTIN	Art. no.	Page
	/pc.	
5109600	**7406788**	351
5109617	**7406792**	351
5109624	**7406796**	351
5894063	**7406805**	352
5894094	**7406806**	352
5894100	**7406807**	352
5983293	**7407099**	353
5110736	**7407152**	303
5110743	**7407156**	303
5110798	**7407160**	303
5110804	**7407164**	303
5110811	**7407168**	303
5110828	**7407172**	303
5110842	**7407180**	303
	/VPE	
5759621	**7407549**	446
5703556	**7407552**	354
5112372	**7407558**	354
5891161	**7407559**	354
5891178	**7407561**	354
5112389	**7407562**	354
	/pc.	
5112433	**7407580**	420
5112440	**7407584**	420
5112457	**7407588**	420
5112464	**7407592**	420
5864936	**7407594**	394
5864943	**7407595**	394
5864950	**7407596**	394
5864967	**7407597**	394
5865001	**7407598**	394
5865018	**7407599**	394
6552948	**7407643**	372
6552962	**7407651**	379
6552979	**7407655**	379
5623472	**7407679**	393
5872573	**7407841**	396
5872580	**7407842**	396
5872597	**7407843**	396
5626855	**7407846**	392
5626862	**7407847**	392
5626879	**7407848**	392
5626886	**7407849**	392
5626893	**7407850**	393
6481866	**7407851**	420
5872603	**7407853**	396
5872610	**7407854**	396
5872627	**7407855**	396
5438694	**7407894**	458
5438700	**7407896**	458
5438717	**7407898**	458
5114055	**7408084**	339
5114154	**7408108**	340
5114178	**7408116**	341
5114215	**7408124**	341
5114239	**7408132**	341
5114277	**7408140**	341
5114291	**7408148**	341
5114338	**7408156**	341
5114352	**7408164**	342
5114390	**7408172**	342
5114413	**7408180**	342
5114437	**7408188**	342
5114451	**7408196**	342
5114536	**7408204**	342
5114604	**7408220**	338
5114659	**7408228**	338
5114703	**7408236**	338
5114826	**7408260**	339
5114840	**7408268**	338
5114895	**7408276**	338
5114901	**7408280**	338
5115687	**7408436**	339
5115724	**7408440**	339
5115731	**7408444**	339
5115748	**7408448**	339
5115786	**7408452**	340
5115793	**7408456**	340
5115809	**7408458**	339
5115854	**7408464**	339
5115908	**7408474**	340
5115915	**7408478**	340

GTIN	Art. no.	Page
	/pc.	
5115977	**7408490**	340
5374336	**7408507**	353
5374343	**7408508**	353
5116745	**7408650**	340
5674498	**7408670**	334
5674528	**7408682**	335
6481927	**7408712**	444
6481934	**7408714**	445
6435272	**7408721**	416
6435289	**7408723**	263
6435258	**7408725**	417
6435265	**7408727**	263
6435296	**7408743**	416
6435302	**7408745**	416
6435319	**7408751**	416
6435326	**7408753**	417
6435333	**7408761**	418
6435340	**7408763**	418
6435357	**7408771**	416
6435364	**7408773**	417
6435371	**7408781**	417
6435388	**7408783**	419
6435395	**7408785**	417
6483969	**7408789**	419
6435401	**7408794**	419
6435418	**7408796**	419
6460670	**7408802**	407
6460687	**7408804**	407
6460724	**7408806**	407
6460731	**7408808**	407
6460748	**7408810**	407
6460779	**7408812**	412
6460601	**7408832**	406
6460618	**7408834**	406
6460625	**7408836**	406
6460663	**7408838**	406
6459278	**7408850**	408
6459285	**7408852**	409
6459292	**7408854**	409
6459315	**7408856**	409
6458981	**7408860**	409
6459049	**7408862**	409
6459063	**7408864**	410
6459124	**7408866**	410
6460786	**7408870**	410
6460793	**7408872**	410
6460809	**7408874**	410
6460830	**7408876**	411
5867340	**7409002**	358
5867425	**7409004**	358
5867463	**7409008**	379
5867524	**7409010**	379
5867531	**7409014**	358
5867548	**7409016**	358
5867593	**7409022**	359
5867647	**7409024**	359
5867654	**7409028**	383
5867722	**7409030**	383
5867777	**7409044**	359
5867821	**7409046**	359
5867838	**7409052**	363
5867845	**7409054**	363
5867883	**7409058**	363
5867906	**7409060**	363
5867944	**7409062**	365
5868002	**7409064**	365
5868088	**7409066**	365
5868125	**7409068**	365
5868132	**7409072**	381
5868149	**7409074**	381
5868187	**7409082**	360
5868194	**7409084**	360
5868200	**7409088**	360
5868248	**7409090**	360
5868255	**7409092**	385
5868262	**7409094**	385
5868309	**7409102**	361
5868316	**7409104**	361
5868323	**7409108**	361
5868361	**7409110**	361
5868378	**7409112**	386
5868385	**7409114**	386
5868422	**7409122**	362

GTIN	Art. no.	Page
	/pc.	
5868439	**7409124**	362
5868446	**7409128**	362
5868484	**7409130**	362
5868491	**7409132**	367
5868507	**7409134**	367
5868545	**7409138**	367
5868552	**7409140**	367
5868569	**7409142**	369
5868606	**7409144**	369
5868613	**7409148**	368
5868620	**7409150**	368
5868668	**7409152**	370
5868675	**7409154**	370
5868729	**7409158**	370
5868743	**7409160**	370
5867104	**7409202**	358
5867111	**7409204**	358
5867128	**7409208**	358
5867166	**7409210**	358
5867173	**7409212**	359
5867180	**7409214**	359
5867227	**7409218**	359
5867234	**7409220**	359
5867241	**7409222**	364
5867258	**7409224**	364
5867265	**7409228**	364
5867272	**7409230**	364
5867289	**7409232**	366
5867296	**7409234**	366
5867302	**7409238**	365
5867333	**7409240**	365
5867357	**7409252**	360
5867364	**7409254**	360
5867395	**7409258**	360
5867401	**7409260**	360
5867418	**7409262**	361
5867456	**7409264**	361
5867470	**7409268**	361
5867487	**7409270**	361
5867517	**7409272**	362
5867579	**7409274**	362
5867586	**7409278**	362
5867609	**7409280**	362
5867630	**7409282**	367
5867661	**7409284**	367
5867678	**7409288**	367
5867685	**7409290**	367
5867692	**7409292**	369
5867708	**7409294**	369
5867715	**7409298**	369
5867739	**7409300**	369
5867746	**7409302**	371
5867753	**7409304**	371
5867760	**7409308**	370
5867784	**7409310**	370
5869023	**7409362**	358
5869030	**7409364**	358
5869047	**7409368**	359
5869085	**7409370**	359
5869092	**7409372**	364
5869108	**7409374**	364
5869146	**7409378**	366
5869153	**7409380**	366
5869160	**7409382**	380
5869207	**7409384**	380
5869214	**7409388**	383
5869221	**7409390**	383
5869450	**7409422**	360
5869467	**7409424**	360
5869504	**7409426**	361
5869511	**7409428**	361
5869528	**7409430**	362
5869566	**7409432**	362
5869573	**7409442**	368
5869580	**7409444**	368
5869627	**7409446**	369
5869634	**7409448**	369
5869641	**7409450**	371
5869689	**7409452**	371
5869696	**7409462**	381
5869702	**7409464**	381
5869740	**7409466**	385
5869757	**7409468**	385
5869764	**7409470**	386

GTIN	Art. no.	Page
	/pc.	
5869801	**7409472**	386
5869818	**7409482**	376
5869825	**7409484**	376
5869863	**7409486**	376
5869887	**7409490**	376
5869924	**7409502**	378
5869931	**7409504**	378
5869948	**7409506**	378
5869993	**7409510**	378
5870005	**7409522**	376
5870043	**7409524**	376
5870050	**7409526**	376
5870104	**7409530**	376
5870111	**7409542**	378
5870128	**7409544**	378
5870166	**7409546**	378
5870180	**7409550**	378
	/VPE	
6539079	**7409680**	379
6539086	**7409682**	379
6539093	**7409684**	379
6539109	**7409686**	379
6539116	**7409688**	379
	/pc.	
5430964	**7410030**	295
5475507	**7410031**	296
5431633	**7410034**	299
5475545	**7410035**	299
5431640	**7410043**	296
5776390	**7410045**	297
5431671	**7410047**	299
5776574	**7410048**	301
5431688	**7410052**	296
5431695	**7410056**	299
5678724	**7410060**	333
5678762	**7410062**	334
5678779	**7410064**	334
5431701	**7410079**	296
5431732	**7410083**	296
5431749	**7410087**	296
5431756	**7410091**	296
5431763	**7410104**	300
5431770	**7410108**	300
5431787	**7410112**	300
5431794	**7410116**	300
5431800	**7410120**	300
5431817	**7410124**	300
5431824	**7410142**	297
5431855	**7410146**	297
5438595	**7410148**	297
5431862	**7410150**	300
5431879	**7410154**	300
5438601	**7410156**	300
5473275	**7410158**	297
5431886	**7410160**	302
5473282	**7410162**	297
5473299	**7410164**	300
5473305	**7410166**	300
5432753	**7410540**	364
5432760	**7410544**	365
5432777	**7410552**	368
5432784	**7410556**	368
	/VPE	
6540914	**7410581**	375
6540921	**7410583**	375
6540938	**7410585**	375
6540945	**7410587**	375
6540952	**7410589**	375
	/pc.	
5651291	**7423950**	321
5651307	**7423952**	321
5651314	**7423954**	321
5651321	**7423956**	321
5651338	**7423958**	321
5651345	**7423960**	321
5651352	**7423962**	321
5651369	**7423964**	321
5651406	**7423966**	321
5651413	**7423968**	321
5651420	**7423970**	321
5651581	**7423972**	321
5651451	**7423974**	321

GTIN	Art. no.	Page
	/pc.	
5651468	**7423976**	321
5651475	**7423978**	321
5651482	**7423980**	321
5651512	**7423982**	321
5651529	**7423984**	321
5651536	**7423986**	321
5651543	**7423988**	321
	/m	
5242925	**7424000**	312
5242932	**7424002**	312
5242949	**7424004**	312
5242987	**7424006**	312
5242994	**7424008**	312
5243007	**7424020**	312
5243045	**7424022**	312
5243052	**7424024**	312
5243069	**7424026**	312
5243106	**7424028**	312
5243113	**7424040**	312
5243120	**7424042**	312
5243168	**7424044**	312
5243175	**7424046**	312
5243182	**7424048**	312
5243229	**7424060**	312
5243236	**7424062**	312
5243243	**7424064**	312
5243274	**7424066**	312
5243281	**7424068**	312
5243458	**7424120**	312
5243465	**7424122**	312
5243519	**7424140**	313
5243526	**7424142**	313
5243571	**7424162**	313
5243601	**7424182**	313
5243656	**7424200**	313
5243663	**7424202**	313
5243670	**7424204**	313
5243687	**7424220**	313
5243694	**7424222**	313
5243700	**7424224**	313
5243717	**7424240**	314
5243724	**7424242**	314
5243755	**7424246**	314
5243762	**7424260**	314
5243779	**7424262**	314
5243786	**7424264**	314
	/pc.	
5243816	**7424280**	320
5243823	**7424282**	320
5243830	**7424284**	320
5243847	**7424286**	320
5243878	**7424288**	320
5243885	**7424300**	320
5243892	**7424302**	320
5243908	**7424304**	320
5243939	**7424306**	320
5243946	**7424308**	320
	/m	
5244127	**7424400**	315
5244134	**7424402**	315
5244141	**7424404**	315
5244172	**7424406**	315
5244189	**7424408**	315
5244196	**7424420**	315
5244202	**7424422**	315
5244233	**7424424**	315
5244240	**7424426**	315
5244257	**7424428**	315
5244264	**7424440**	315
5244295	**7424442**	315
5244301	**7424444**	315
5244318	**7424446**	315
5244325	**7424458**	315
5244356	**7424460**	315
5244363	**7424462**	315
5244370	**7424464**	315
5244424	**7424480**	316
5244431	**7424482**	316
5244448	**7424484**	316
5244455	**7424486**	316
5244462	**7424488**	316
5244479	**7424500**	316
5244486	**7424502**	316

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 11:21:04 (LLExport_02579) / 2019/04/18

GTIN	Art. no.	Page
	/m	
5244493	**7424504**	316
5244509	**7424506**	316
5244516	**7424508**	316
5244677	**7424600**	316
5244684	**7424602**	316
5244714	**7424620**	316
5244721	**7424622**	316
5244752	**7424662**	316
5244783	**7424682**	317
5244868	**7424720**	317
5244899	**7424722**	317
5244905	**7424724**	317
5244912	**7424740**	317
5244929	**7424742**	317
5244950	**7424744**	317
5245018	**7424780**	317
5245025	**7424782**	317
5245032	**7424784**	317
5245049	**7424800**	317
5245070	**7424802**	317
5245087	**7424804**	317
	/pc.	
5651574	**7424821**	320
5245155	**7424884**	318
5245162	**7424886**	319
5245179	**7424900**	318
5245186	**7424902**	318
5245193	**7424904**	319
5245209	**7424906**	319
5245216	**7424920**	318
5245223	**7424922**	318
5245230	**7424924**	319
5245247	**7424926**	319
5246435	**7425600**	458
5434757	**7425970**	321
5434764	**7425972**	321
5434795	**7425974**	321
6149131	**7427019**	389
5991953	**7427021**	391
5991960	**7427022**	391
5989868	**7427025**	389
5759065	**7427027**	391
6266739	**7427090**	393
6591848	**7427095**	395
5916383	**7427200**	398
5916420	**7427204**	398
5916437	**7427208**	399
5916444	**7427212**	399
5916482	**7427216**	400
5916499	**7427220**	400
5916505	**7427224**	399
5916543	**7427228**	400
5916550	**7427232**	400
5916567	**7427236**	400
5916628	**7427248**	398
5916666	**7427252**	398
5916727	**7427300**	401
5916734	**7427304**	401
5916741	**7427308**	401
5916758	**7427312**	401
5916765	**7427316**	402
5916772	**7427320**	402
5916789	**7427324**	402
5916796	**7427328**	403
5919308	**7427440**	399
5919315	**7427444**	402
5479451	**7428062**	308
5858270	**7428140**	372
5858287	**7428141**	371
5858294	**7428142**	372
6459483	**7428526**	406

Always indicate the item number when ordering.

Gesamtkatalog_K1_LFS_EGS_UFS_2019_Belgien_Werbseiten / en / 2019/04/18 11:21:04 (LLExport_02579) / 2019/04/18

© OBO Bettermann Order no. 9196333 05/2019

OBO BETTERMANN n.v./s.a.
Bist 14
2630 Aartselaar
BELGIË

Klantenservice België
Tel.: +32 3 870 - 74 00
Fax: +32 3 887 - 40 00
export@obo.be

www.obo.be

Building Connections

OBO
BETTERMANN